

## APPENDIX A

33 CLEVELAND STREET, LONDON W1T 4HX




Flush Ceiling Downlights

Whitegoods WG-60RGDL

## 2.4" General Downlight

### Round Flush Diffuser

whitegoods

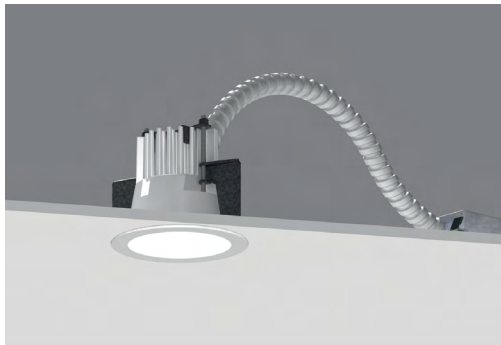

Note: Minimum of 5" (127mm) ceiling void is required to install the fixture from below the ceiling.

#### Ordering Information

WG-60RGDL	RBT				FROD		
Model	Fixation	Power <sup>1</sup>	CRI/CCT <sup>2,3</sup>	Driver <sup>4</sup>	Lens	Finish	Options
WG-60RGDL	RBT	L M H	827 830 835 840	X SW D010 DALI LE	FROD	W (std) B G P F	CP IC LP SH WL

#### Luminaire

- 2.4" (60mm) small aperture, low brightness downlight for general illumination.
- Suitable for interior or exterior use under canopy or in wet locations (WL) such as showers.
- Installation from below the ceiling for remodel and new construction.
- Integral or remote driver. Integral driver requires 4.5" (114mm) minimum ceiling clearance (void).
- White finish standard.

#### Fixation

- RBT = Recessed bezel trim

#### Power<sup>1</sup>

- L = Low power, 5.9W @ 350mA
- M = Mid power, 8.6W @ 500mA
- H = High power, 12.4W @ 700mA

#### CRI/CCT<sup>2,3</sup>

80+ CRI (Low/Medium/High Power)

- 827 = 2700K, (838/1233/1540 lm)
- 830 = 3000K, (901/1233/1540 lm)
- 835 = 3500K, (965/1311/1698 lm)
- 840 = 4000K, (965/1311/1698 lm)
- For 90+ CRI, specify 927, 930, etc. Approximately 15% less lumens.

#### Driver<sup>4</sup>

- X = Driver ordered separately
- SW = Switched/NON DIM
- D010 = 0-10/1-10V DIM
- DALI = DALI DIM
- LE = Leading-Edge DIM

#### Lens

- FROD = Flush Round Opal Diffuser

#### Finish (Trim/Cone)

- W = white (standard)
- B = Black
- G = Gray
- P = Polished
- F = Custom finish (provide RAL code)

#### Options

- CP = Chicago Plenum Housing
- IC = IC/NC Housing
- LP = Landing Pan
- SH = Reduces required plenum space to 3.5" (89mm) (available in low and medium power S, S010 and SPH drivers only)
- WL = Wet Location
- To specify multiple options, select the appropriate grouped codes from drop-down e.g. SH-WL

#### Emergency

- Emergency LED driver available, order separately (remote)

<sup>1</sup> Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.

<sup>2</sup> Other lumen packages available, consult factory.

<sup>3</sup> Source lumens shown, see IES files for delivered lumens.

<sup>4</sup> See power supply page for details.