




A slim section vertical sliding unit suitable for treating traditional sash windows. Spring balances fully support the sliding sashes in all positions.

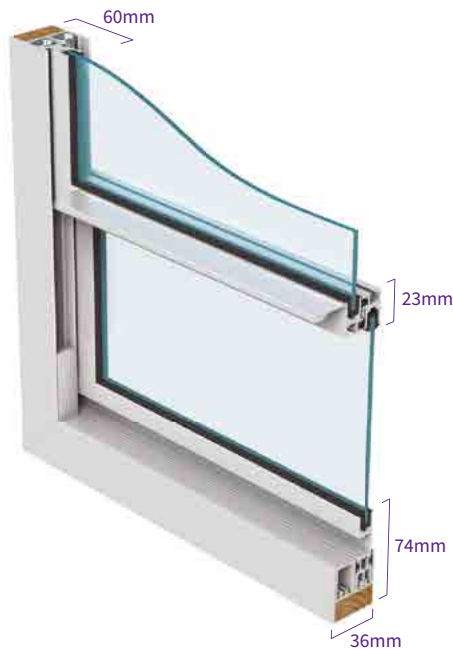

FEATURES

- Recessed finger pull on lower sash allows contra-sliding to assist with cleaning
- 23mm interlock stile with projecting finger pull
- Twin brush seals ensure high sealing efficiency
- Fixings concealed within the frame - trims not required
- Frames may be linked with a colour matched aluminium transom/mullion section

DIMENSIONS

Recommended maximum frame

Format	Height (mm)	Width (mm)
2 PANES	3000	1400

Maximum sash (h)1500mm x (w)1400mm, minimum sash (h)300mm x (w)350mm

Overall dimensions are subject to a maximum sash weight of 20kg

Sash height to width ratio should not normally exceed 1:3

A minimum frame to frame gap of 75mm is recommended for access to the outer window

FRAME COLOUR

Stock finish is white HIPCA 9910 semi-gloss

Any standard powder paint, wood grain finish or anodised finish to order

OPTIONS

Glazing	4mm to 6.8mm
Frames	Heavy duty box interlock stile Curved heads - minimum radius 450mm
Ironmongery (see page 44/45)	H3 Recessed finger pull to upper sash H17 Cranked 'D' handle to upper sash L2 Lockable fitch catch L4 Plunge lock L13 Sliding latch