




A heavy duty fixed frame unit capable of providing blast mitigation to level EXV25 of ISO 16933 and intruder resistance to levels SR1 or SR2 of standard LPS1175, equivalent to bars and grilles. The frame can be shaped or curved to a full circle.

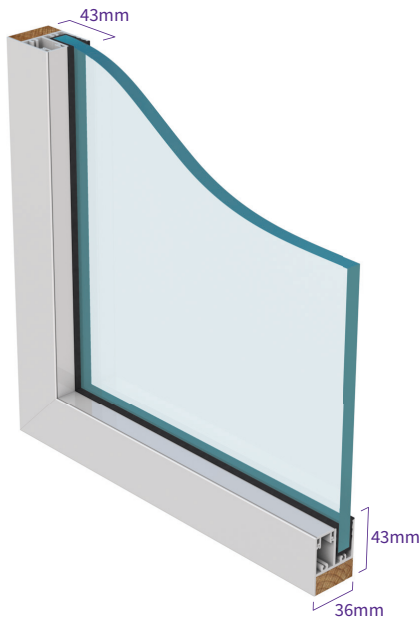

FEATURES

- 20mm glass edge cover
- Concealed room side fixing channel
- Rectangular frames may be linked with a colour matched aluminium transom/mullion section

DIMENSIONS

Recommended maximum frame

Format	Height (mm)	Width (mm)
FIXED PANE	3000	2000

Minimum (h)300mm x (w)300mm

Fixed panels used on their own should be subject to a risk assessment covering means of escape and condensation management

FRAME COLOUR

Stock finish is white HIPCA 9910 semi-gloss

Any standard powder paint, wood grain finish or anodised finish to order

OPTIONS

Glazing 6mm to 12.04mm

Frames Curved head, jamb or full circle – minimum radius 500mm