



The only LED Trough Light on the market designed and engineered by LED specialists with over 40 years of sign making experience.

The Lumenlinear-SOLIS is the latest in the Lumenlinear series; the most technically advanced, aesthetic and energy saving LED trough light available.

**What makes the Lumenlinear SOLIS unique?**


- Uses purpose-made high quality LED Strip, designed by Spectron LED
  - Delivers a continuous beam of light with no shadows or spots
  - The LED strip is encased in silicone with no need for a plastic cover, which eliminates water ingress and mould build up over time.
  - Highly energy efficient
  - Made to order with typical turnaround of 1-2 days.
  - Any length available (up to 5.8m in a single length, over 5.8m in multiple lengths)
  - Easy fixing - a bespoke V3 90° bracket allows for versatile fixing and is also quick and easy to install
  - Smallest unit on the market
  - Sleek, minimalist design
  - Double sided (pictorials) available (with 45 or 60cm projection rods)
- Available in black, white or anodised silver as standard, or can be powder coated to any RAL for an additional fee

**What's included?**

The Lumenlinear-SOLIS comprises main body, silicone tube 3000K or 7500K LED strip, integrated waterproof driver, spacers, end caps, fixing brackets and 300mm projection rods.

**Other models available**

Lumenlinear SOLO uses LED modules and has an integrated driver for fast installation  
 Lumenlinear - X uses LED modules and uses a remote driver for easy maintenance.

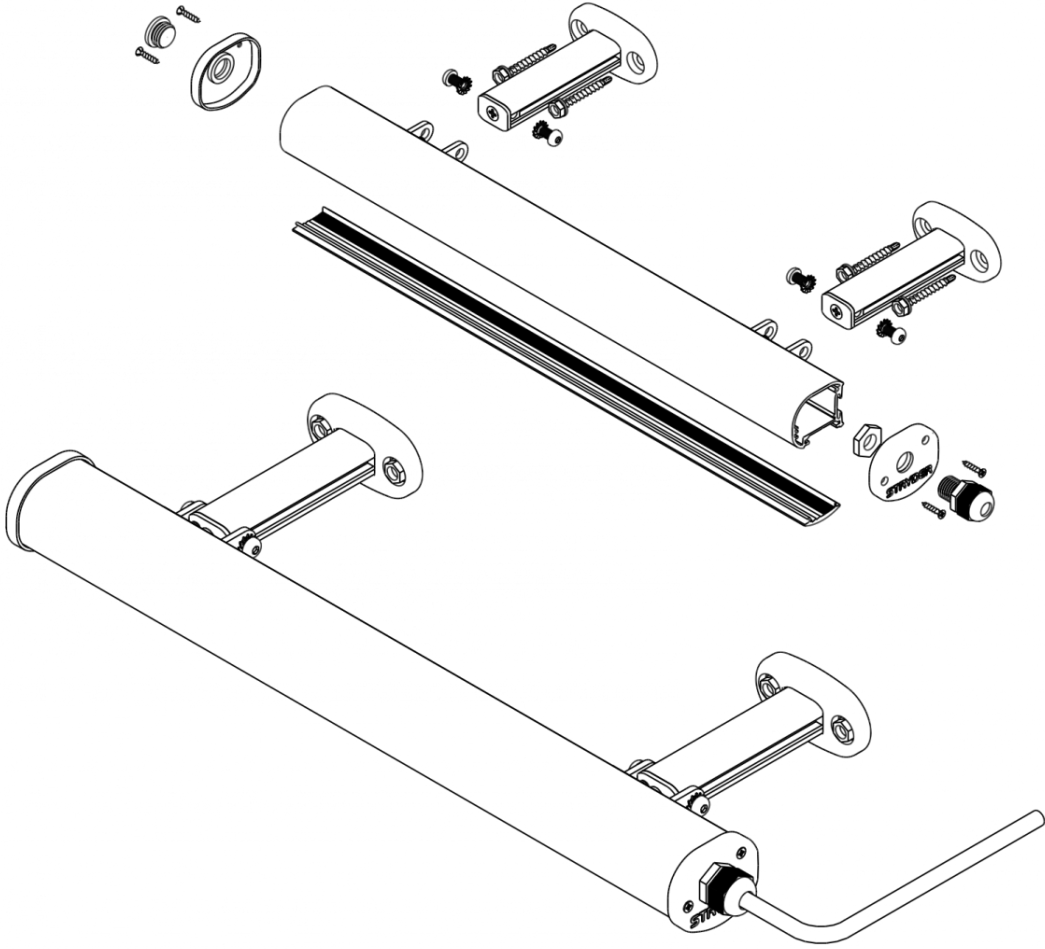


Cast alloy fixing bracket with 3 points fixing holes allowing a secure installation.  
 Multi directional fixing options with choice of top of sign fixing, wall fixing, vertical or horizontal fixing, pictorial through hole fixing methods.

Specification:	
Body:	aluminium
Brackets:	aluminium
Colour:	Powder coated black
	Powder coated white
	Silver anodised
Kelvin:	Warm white 3000K
	Cool White 7500K
LED	SMD 2835
Lumen:	1890 lm
Voltage:	240v
Wattage:	12w/m
Efficiency:	156 lm/w
IP rating:	IP65

Dimensions:	
Length:	5.8m max.
Body:	60 x 35mm
Projection:	300 - 600mm

**Component:**

- Main body
- End cap with rubber gasket
- Power cable
- Spacers
- Silicone tube LED strip
- Wall fixing bracket
- 300, 450, 600m projection bar
- Plastic plug (cap)
- IP67 LED driver

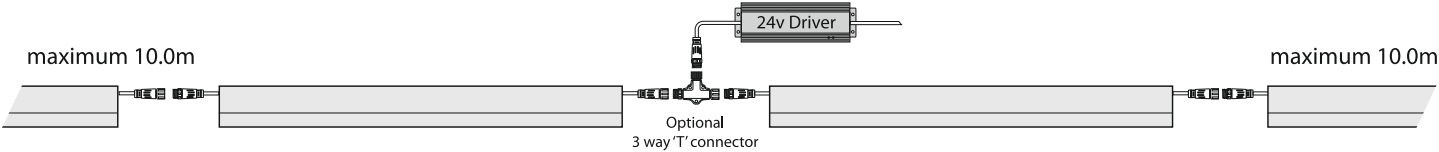

D 1 3850mm Lumenlinear SOLO including LED modules, 300mm brackets & integrated 24v power supply.  
 Colour finish: Black  
 Cable entry: TBC