










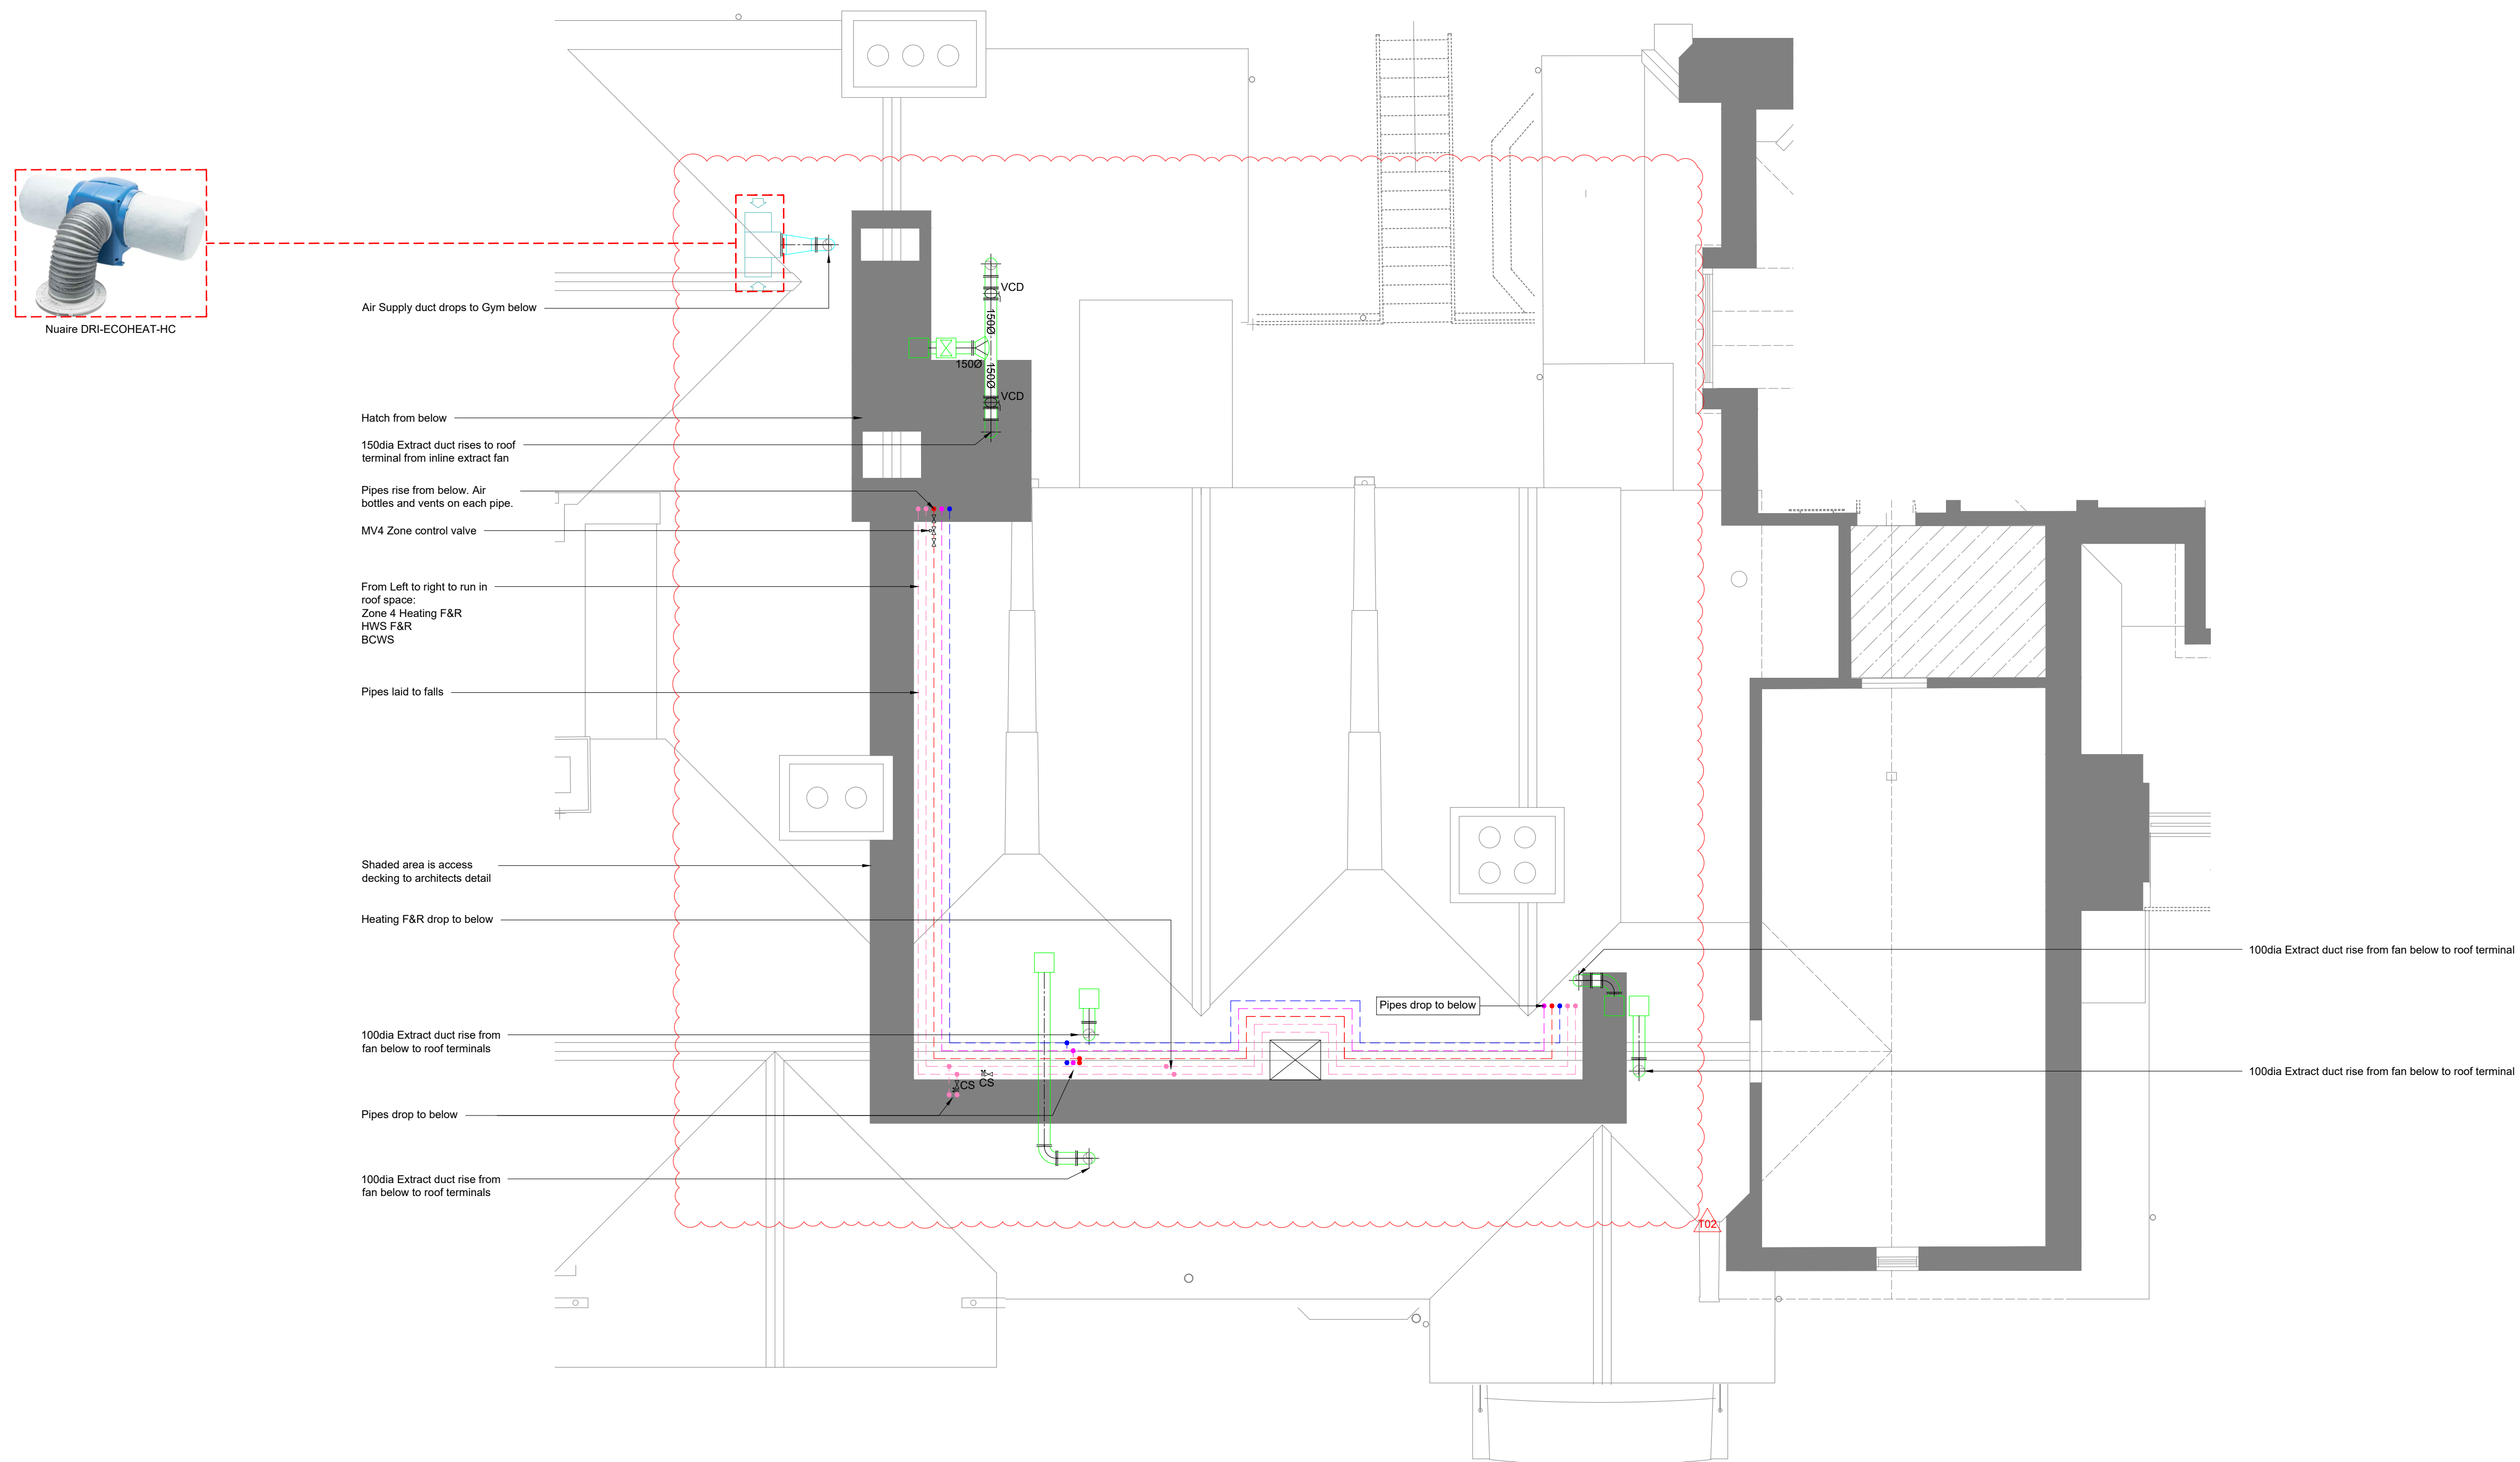


- ### Notes
1. This drawing should not be scaled
  2. All pipework in roof space is to be trace heated & insulated as per specification
  3. Due allowance to be made in supporting pipes for thermal expansion
  4. Equipment without references is identified by room name and number in the specification and schedules
  5. Refer to schematics for sizes



Legend

- |   |  |
|---|--|
|  | Heating F & R  |
|  | Boosted Cold Water   |
|  | Mains Cold Water   |
|  | Hot Water Flow   |
|  | Hot Water Return   |
|  | Extract Ductwork   |
|  | Supply Ductwork  |
|  | Extract Fan  |
|  | Commissioning Station - Crane or equal approved.<br>Contractor to select size to suit flow rate of pressure<br>loss required |
|  | Motorsised Two-position control valve  |
|  | Access Route   |

For Tender

Rev	Date	Description	Cad	Chk
-----	------	-------------	-----	-----

Architect

Bowker Sadler Partnership

Client

Jaga Developments (London) LTD

Project

## The Hoo Hampstead

Drawing Title

House  
Mechanical Services  
Roof  
Layout

**ScotchPartners**

Building Services Engineering | Sustainability | Acoustics

90 High Holborn  
London  
WC1V 6LJ

020 3544 5400  
[www.scotchpartners.com](http://www.scotchpartners.com)

Issue **Stage 4(i)**

Date Aug 22 Scale @ A1 1:50

Drawn By KS Checked By JB

5243-SP-MH-RF-DR-Z-400 T02