








# LD Support Foot

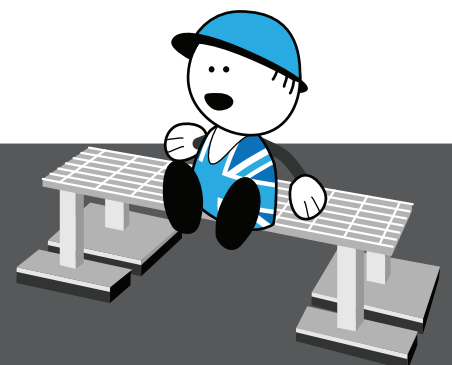

This drawing remains the property of Roof Runner and is loaned on condition that it is not reproduced, copied or loaned to any third party, in part or whole, without our expressed permission.

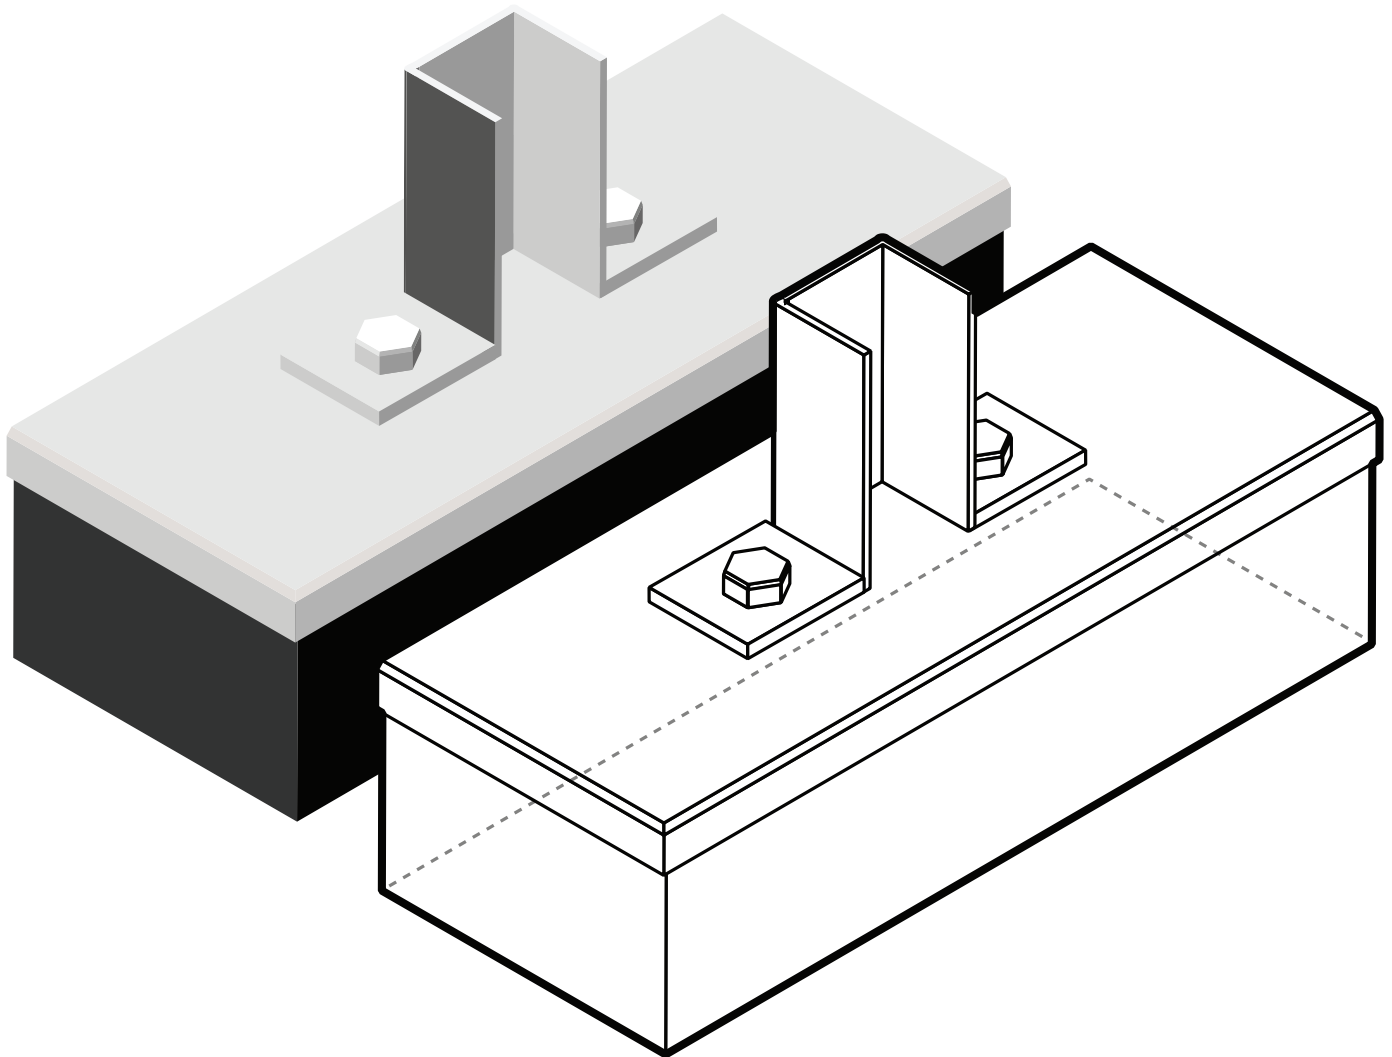

**LD SUPPORT FOOT**  
(L)300MM X (W)100MM X (H)50MM

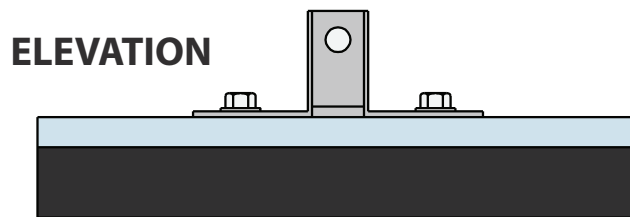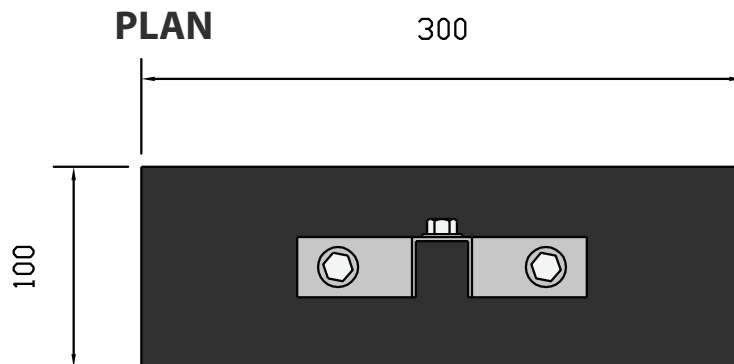

**Technical Data**

Safety loads individually

**Project application:** Cable tray, smaller pipe systems, ducting

**Roofing:** Membrane and Bitumen

**Material:** Mild steel BS EN 10025 Yield 280 N/mm<sup>2</sup>  
Ultimate tensile strength 370 N/mm<sup>2</sup>

**Protection:** HDG BS EN ISO 1461

**Base material:** Closed cell polyethelene 67 kg/m<sup>3</sup>

**Fasteners:** BS 6946 BS EN Yield stress 170/mm 21

