


## 26 Fitzroy Square, Landing Remedial Work Method Statement

LONDON  
STONEMASONRY

|     |  |  |  |  |
|-----|--|--|--|--|
| 001 |  |  | <ul style="list-style-type: none"><li>- We will cut a neat hole in the skirting board above the slab that is very slightly moving and install slate packing between the Portland stone and the brickwork that sits on the Portland stone. We will anchor the slate in place using Chem Fix or similar, to ensure that there is no way for the slate to move. This should stop any movement within that part of that slab. We will then fill the hole in the skirting board and decorate it (paint to be supplied by others).</li></ul> |  |
|-----|--|--|--|--|

## 26 Fitzroy Square, Landing Remedial Work Method Statement

002

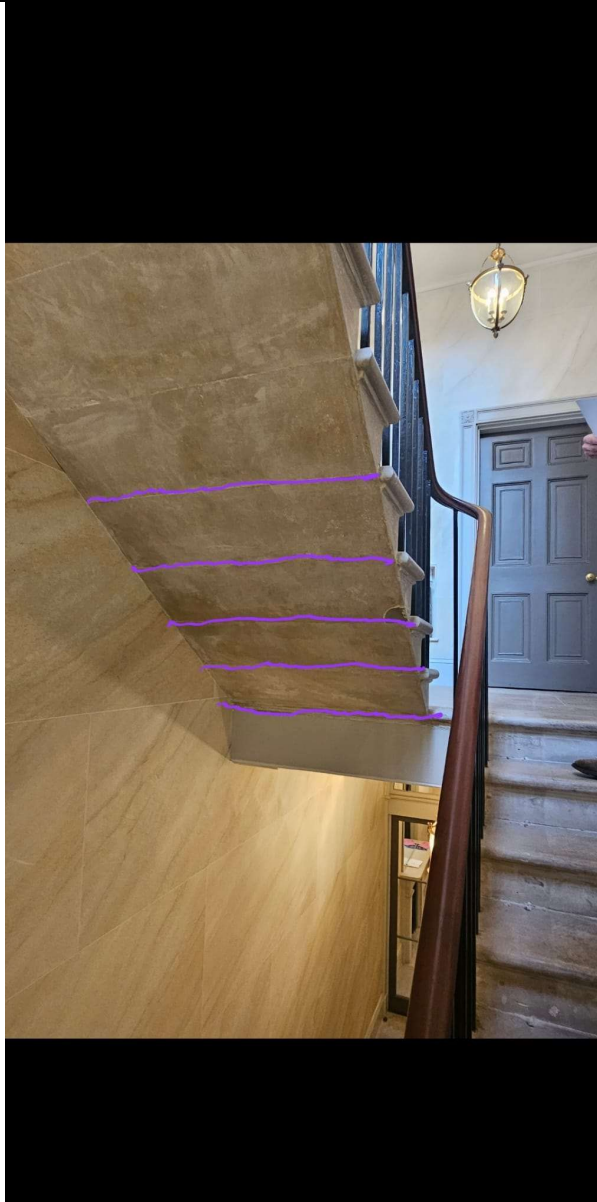


- Once the above has been completed we will install Acrow props against each step that the joint lines have been highlighted on. There will also be Acrow props installed below the staircase below to ensure the staircase is properly bearing on solid ground. We will then very slowly and incrementally tighten the Acrow props, forcing the joints between the risers to open. Once open we will install thin slate packers and stone resin to lock these joints into the open position. We will then repoint the joints using Portland repair mortar. This should ensure that there is no further movement between the steps and platform.

## 26 Fitzroy Square, Landing Remedial Work Method Statement

LONDON  
STONEMASONRY

003

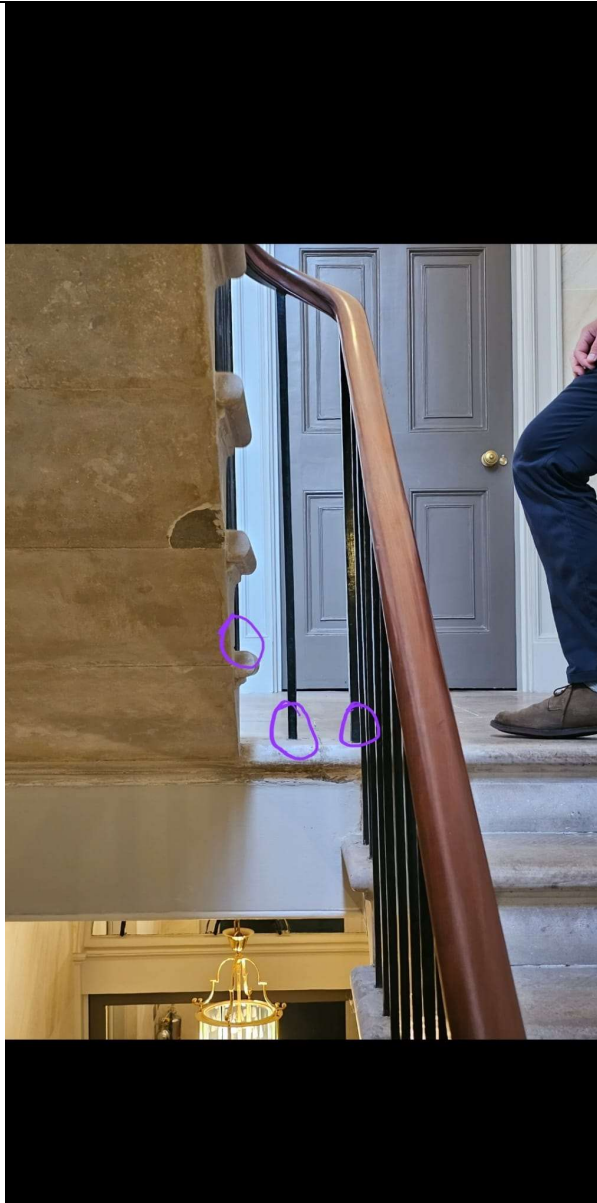

- We will also remove the lead from the stanchions that have been circled and install resin to lock them into position and repoint above the resin using a Portland repair mortar.