

# For use fitted through walls

Sonair provides mechanical input ventilation when switched on, when switched off provides background trickle ventilation which includes a controllable shutter.

Sonair is a wall mounted input fan featuring touch control with an LCD display.

- Sonair F+ ventilates and cleans the air
- · Independently tested by the BRE
- Exceptional sound attenuation (up to 56dB\*)
- Air cleaning
- Low energy



## Features & Benefits

- → Meets guidelines for occupant accessibility
- → Increase occupant awareness of system operation
- → Discreet design
- → Supplied with a flexible cable and a 13 amp plug

#### Performance

Full test details available on request Input airflow rate (m³/h) – 28-225

Acoustic  $D_{n,e,w}$  (+/\_) - 55/56\* (Sonair F+).

\*depends on filter


Tested to the 'Noise Insulation Regulations'.

Background ventilation rate of 2500EA when the unit is switched off and the shutter is open.

Product	Product Code
Sonair F+ including G3 Filter	S103SAUK
Sonair Filter G3	F211
Sonair Filter F6	F209



## Installation

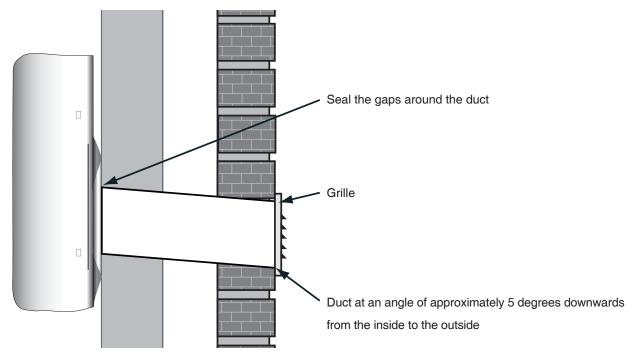

#### **Acoustics**

Acoustics is becoming a more important factor in more densely populated areas, therefore the requirement for sound attenuating ventilators has increased. As standard/acoustic trickle ventilators cannot provide the attenuation levels necessary, more sophisticated solutions are required. The Sonair achieves acceptable noise reducing levels.

## **Sound Production**

Sound pressure level, LpA; 10 m<sup>2</sup> according to ISO 3741

Canacity	Sonair F+	
Capacity	G3 Filter	F6 Filter
30 m³/h	<11.5	<19
45 m³/h	<18.5	27
60 m³/h	23.5	33
90 m³/h	34	41.5
140 m <sup>3</sup> /h	43.5	51.5
Sound Attenuation according to ISO 140-10		
D <sub>n,e,w</sub> dB (A)	56	55

Independently tested to requirements of noise insulation regulations.

## **Dimensions**

445 (H) x 310 (W) x 134 (D)

#### Housing

Plastic ABS white RAL 9003

## Voltage

220-240V/50 Hz

## **Energy Consumption**

Max. 13 Watt at 17 l/s (60 m³/hour) Max. 43 Watt at 62.5 l/s (225 m³/hour)

## **Ventilation Capacity**

Max. 62.5 l/s (225 m³/hour) with a G3 filter

## **Duct**

100 mm (standard)

## More information

www.titon.com or 01206 814879