



### Standard Unit Dimensions:

Width: 2140mm  
Height: 2150mm

### Length with Capacities:

2000mm (4 Cycles)  
3600mm (8 Cycles)  
4100mm (10 Cycles)  
5000mm (12 Cycles)  
6000mm (14 Cycles)

### Colours/Finishes:

	 RAL 9006 White Aluminium	 RAL 7016 Anthracite Grey
 BS 4800 10 A 07 Nimbus Grey	 RAL 3020 Traffic Red	 RAL 9005 Jet Black
 BS 4800 14 C 39 Holly Green	 RAL 1023 Traffic Yellow	 BS 4800 00 A 05 Goose Grey
 RAL 5015 Mid Blue	 RAL 5013 Dark Blue	 RAL 9016 Traffic White

The colours shown are a guide only.  
Please check a colour chart to see the actual colour.

## Product Information

The Wardale® cycle shelter is our best selling and most versatile shelter. With its modular design the Wardale cycle shelter can be linked together to create banks of shelters which allow to you accommodate almost any quantity of cycles. The Wardale can also be fitted with Swinging or Sliding gates with a range of locking mechanisms available to create a fully lockable and secure shelter.

## Features

- Polycarbonate End Panels Included
- Robust modular construction featuring load bearing purlins
- Welded end frames and purlin section made from heavy-duty box section assembled with anti-tamper high strength bolts
- Anti-climb end frames
- Adjustable baseplates
- Bottom purlin provides anti-crawl bar on level surface
- Hot dipped galvanized to BS EN ISO 1461:2009
- 4mm Clear View PETg UV Roof and Side Cladding (5mm also available)
- Breeam Compliant Configurations

## Materials Used

- Framework - Mild Steel
- Cladding - 4 mm PETG uv
- Fasteners - Zinc Plated
- Cover Strips - Pre-galvanized steel flat

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com

### Finish Options

- Galvanised to BS EN ISO 1461:2009
- Galvanised to BS EN ISO 1461:2009 & Polyester Power Coated

### Weather Resistance

Cladding is UV Stabilised  
Wind resistant to 23m/s

### Fire Resistance

Cladding is fire tested to '1Y' for BS 476

### Guarantees, Warranties, Design-Life and Life-Expectancies

- 25 year structural guarantee\*
- 34 year (min) life expectancy for Hot Dip Galvanizing
- 8-10 year life expectancy on standard powder coatings
- 10-15 year life expectancy on Duplex (Zinc Coated) powder coatings
- 10 years' manufacturers guarantees\* on cladding material(s)
- 10 years' warranty\* on material (only)
- 12 months' warranty\* on parts & labour

\*Maintenance and other qualifying criteria apply

### Options

- Steel profile, trapezoidal roof cladding
- Opal Cladding to Roof and Sides
- Extended adjustable baseplates for submerged fixing
- Swinging Security Gates
- Sliding Security Gates
- Mechanical or Keyed Locks
- Further anti crawl bars can be fitted dependent on surface level
- Helmet Lockers
- Powder Coating to a wide range of colours
- LED or solar lighting
- Full Installation Service









#### Standard Unit Dimensions:

Width: 2140mm  
Height: 2150mm

#### Length with Capacities:


2000mm (4 Cycles)  
3600mm (8 Cycles)  
4100mm (10 Cycles)  
5000mm (12 Cycles)  
6000mm (14 Cycles)

#### Colours/Finishes:


		
Galvanised Only	White Aluminium	Anthracite Grey
		
BS 4800 10 A 07 Nimbus Grey	Traffic Red	Jet Black
		
BS 4800 14 C 39 Holly Green	Traffic Yellow	Goose Grey
		
Mid Blue	Dark Blue	Traffic White

The colours shown are a guide only.  
Please check a colour chart to see the actual colour.

### Diagram

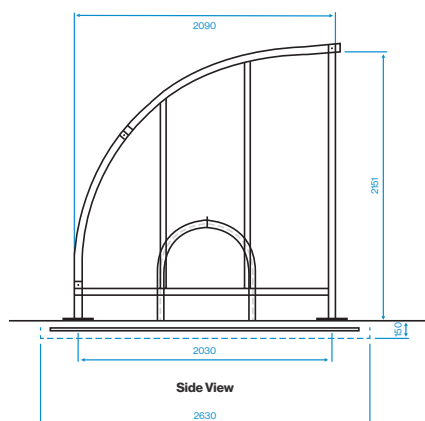

### Installation

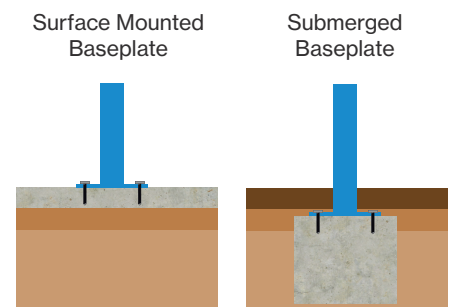

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com