


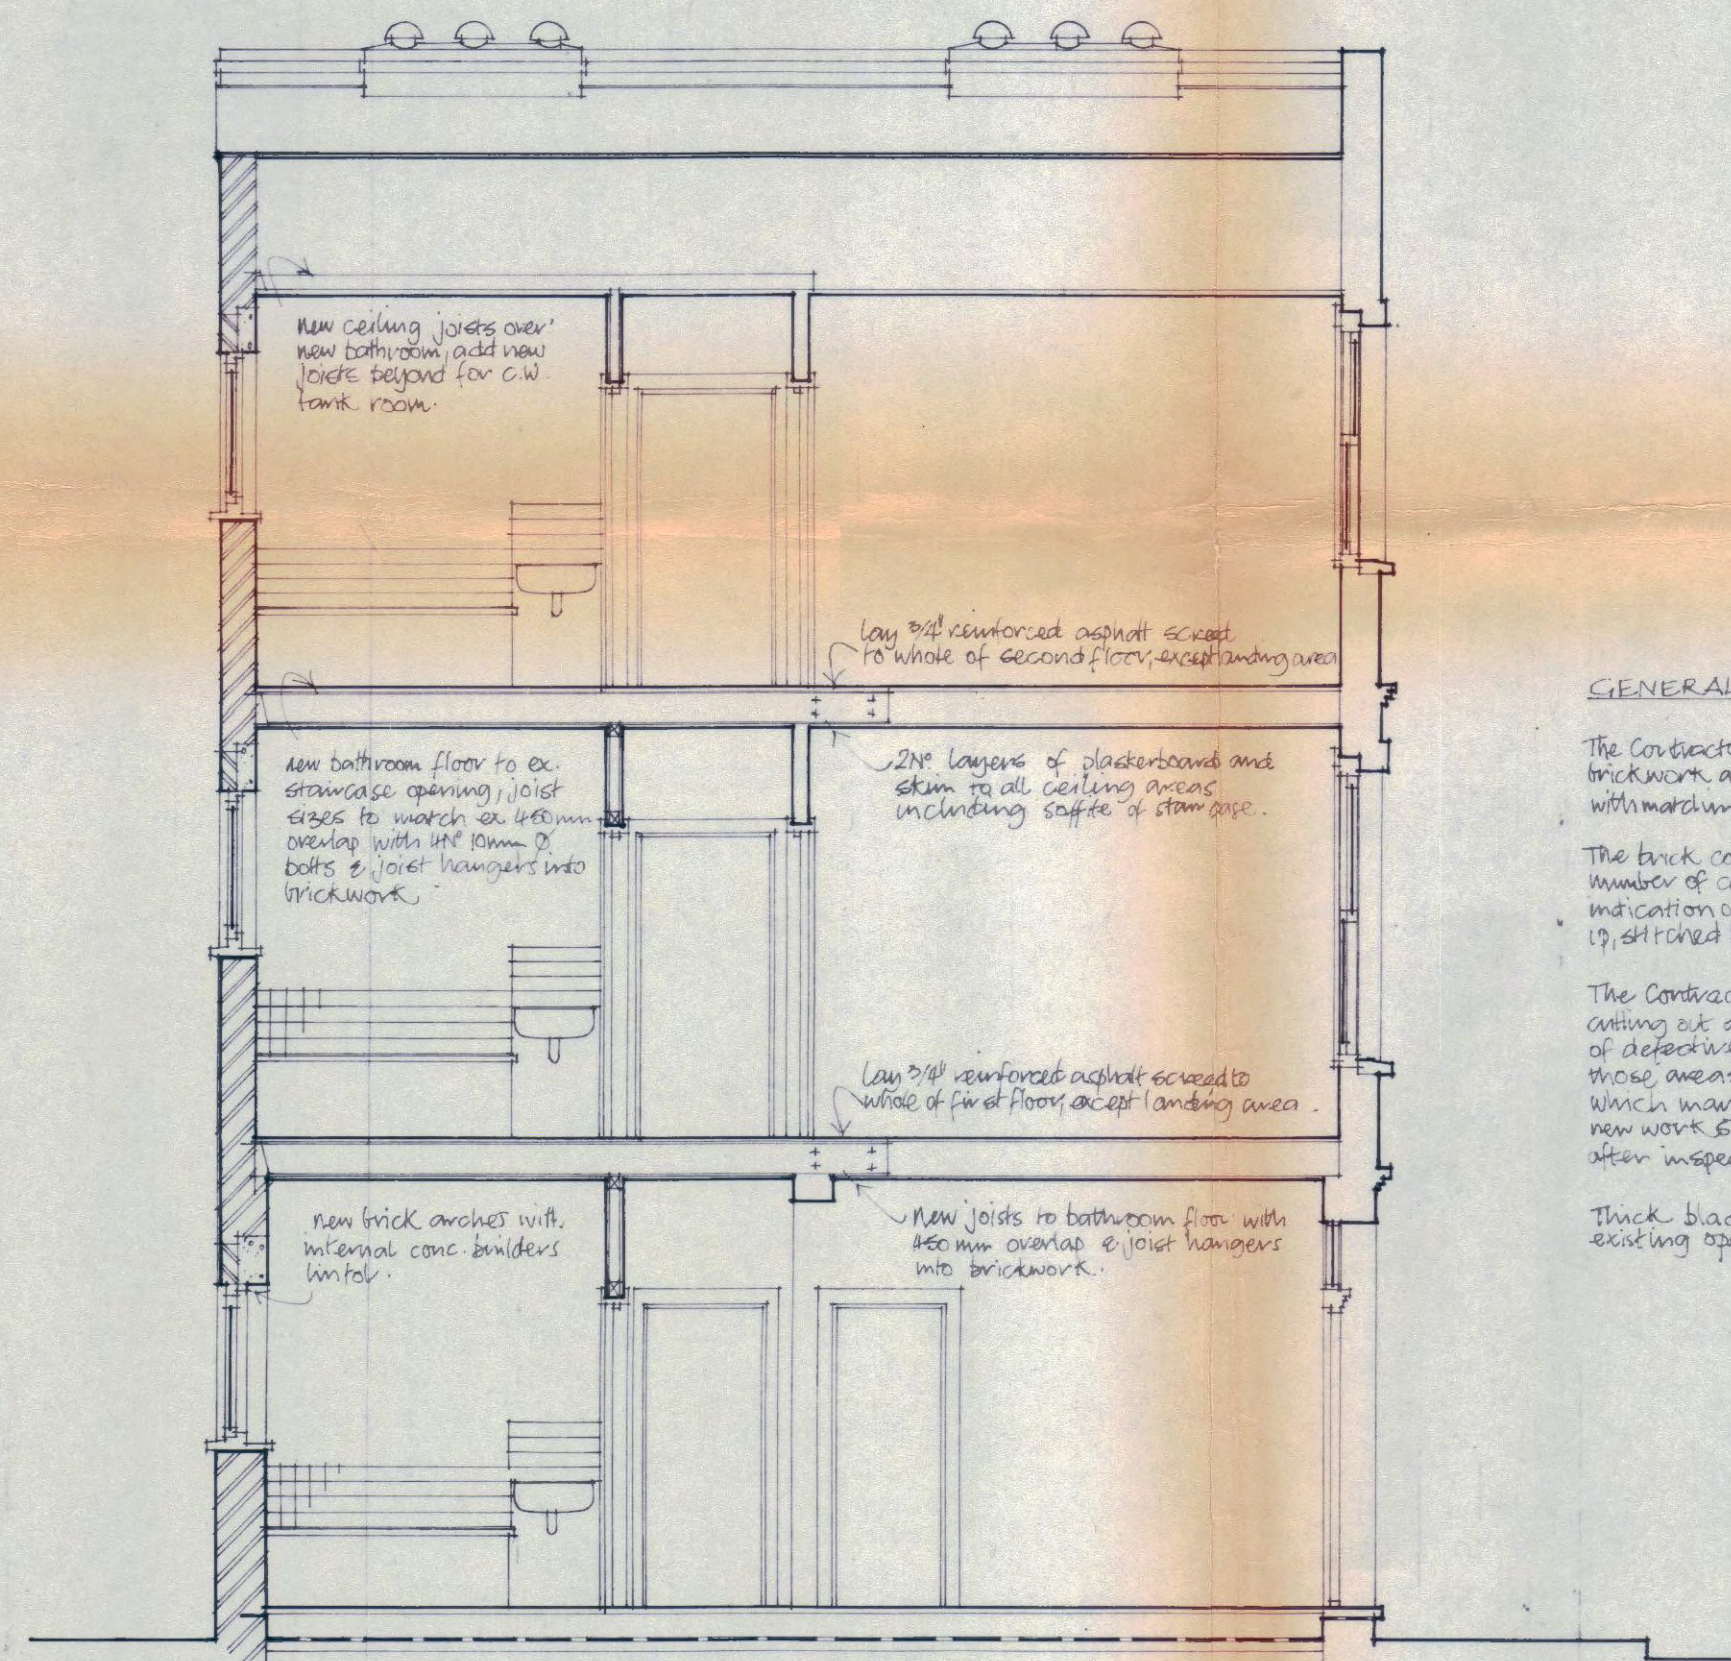

**GENERAL NOTE:**


The Contractor is to stitch back disturbed brickwork and block up existing openings with matching bricks & bond.

The brick coursing is not a guide to the number of courses required, it is an indication of the areas to be blocked up, stitched back and made good.

The Contractor should also allow for the cutting out and replacement of areas of defective brickwork, other than those areas indicated and noted, which may appear in demolition or new work & or which may be found after inspection by the Architect.

Thick black dotted lines indicate existing openings to be bricked up.

Ground Floor: Form new concrete screed, slab to whole of ground floor as follows:  
50mm screed on 100mm concrete over 1000 gauge reinforcement, 3 p.p.s. on 50mm sand. Finish on 1mm 60mm well consolidated hardcrete.

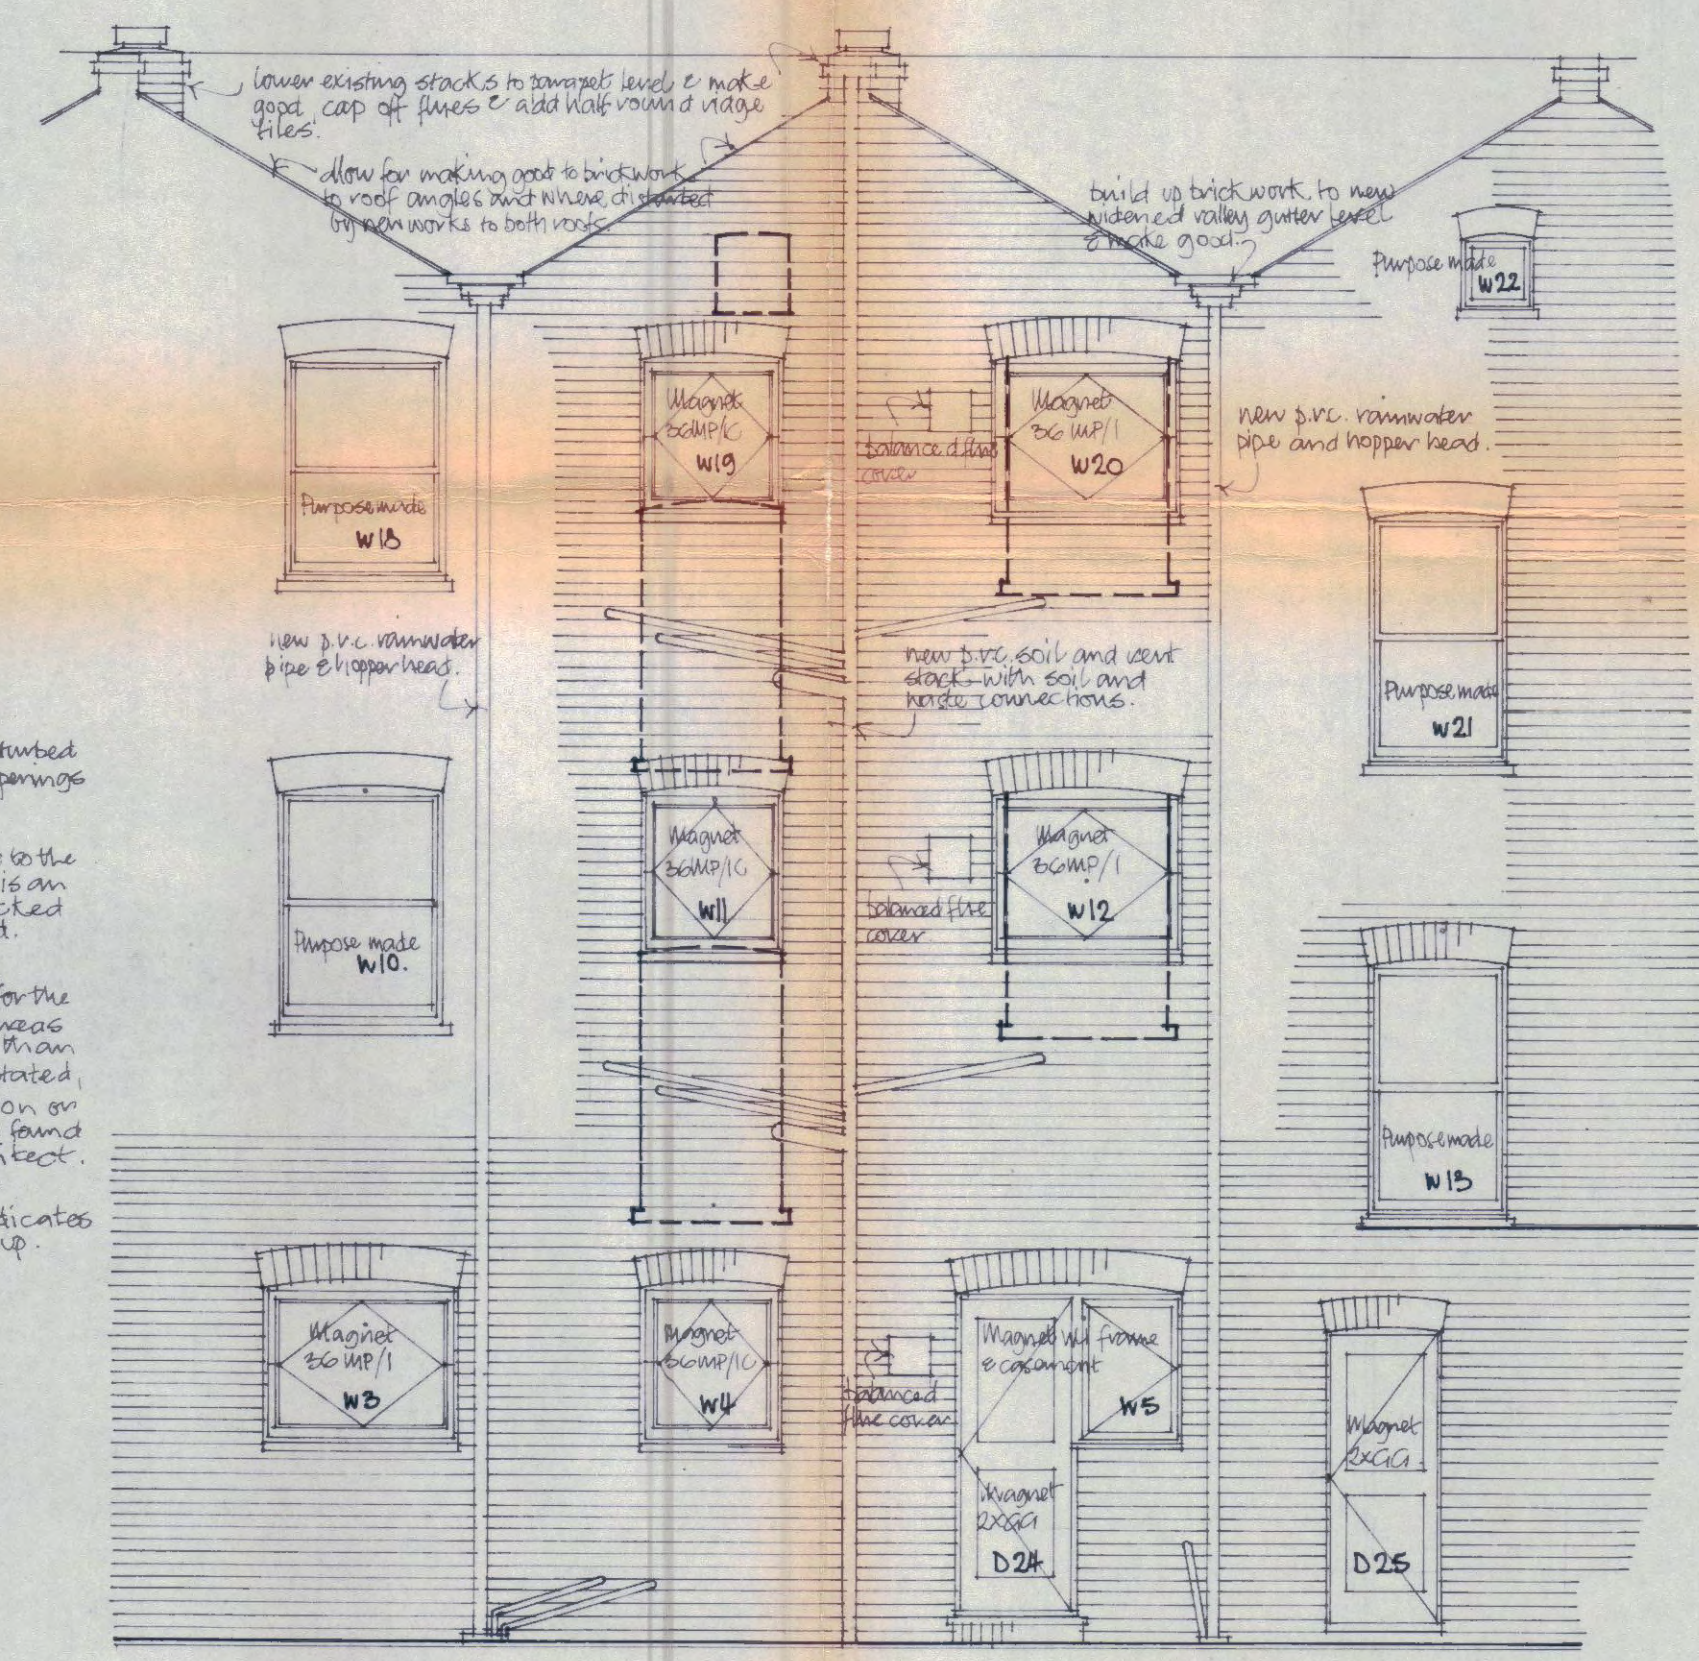

**FRONT ELEVATION**

Allow for the replacement of 50% of existing sash box frame windows (to match existing) and allow for overhauling remaining box frames and sashes, replacing damaged rails and sashes, add new parting beads and sash cords, reglazing where necessary. Overhaul, repaint, make good all stucco work areas, including cills, reveals and heads to windows and doors. Allow for the cleaning down of brickwork and repair to any damaged brickwork areas. Allow for the renewal of existing main entrance doors or for the complete overhaul as to be directed.

**REAR ELEVATION**

Allow for the replacement of all windows and doors. Alter, adapt existing and make new openings where indicated to take windows and doors. Form new brick arches with internal concrete lintols where indicated and brickup in matching stocks redundant window / door openings. Clean down brickwork and allow for approximately 70% repointing after new work. Allow for 2 No. pvc rain water pipes and hoppers and single stack soil and vent pipe. Render rear elevation up to line indicated. Allow for approx. 50% replacement of existing concrete cills and for the overhauling and making good of existing.

**ROOF**

Allow for the replacement of approx. 65% of all roof timbers. Form new widened zinc valley gutters to falls to rear of property. Add new battens over roofing felt and reslate using as many of the existing slates as possible. Insulate the whole of the roof space with glass fibre insulation. Add all new necessary flashings. Add new top course on dpc and new brick on edge coping to party parapet walls. Cap off flues with half round ridge tiles bedded to tops of cut down chimney stacks. Repoint and make good parapets and chimney stacks. Reform roof light and add new opening light for roof access.



CTP/G11/25/A/24747.

WILLES ROAD HEALEY STREET G I A

Architects Planners Designers  
27 Ovington Square  
London SW3 1LJ  
01-581 2986-9

**Rothermel Cooke**

JOB TITLE  
21 & 22 GRAFTON CRESCENT, NW1.  
DRAWING TITLE  
ELEVATIONS & SECTION  
SCALE 1:50  
DATE MAY 1977  
JOB No. 528  
DRAWING No. 3  
REVISION No.