

## Proposed Facing Material 01

Red brick slips, flush-pointed in horizontal stack bond, with mortar in matching tone



Location: see 1:50 elevation

Early Mews  
Material Sheets  
Revision A  
30/04/2024





BRICK FACED EXTERNAL  
WALL INSULATION SYSTEM



X-Clad is a brick faced external wall insulation (EWI) system suitable for modular, new build and retrofit projects.

## BENEFITS


- X-Clad is ideal for finishing new build structures. It is lightweight and has a slim profile.
- X-Clad can also be retrofitted to an existing substrate without the need for additional foundations or groundworks, reducing time and disruption on site.
- Indistinguishable from traditionally constructed brickwork, extremely low maintenance and has a life span of at least 25 years.
- Transforms not only the external appearance of the property but internal comfort conditions too. The building is warmer and drier as X-Clad can help to eliminate damp and condensation problems.
- Insulates: saving energy, reducing heating bills and carbon emissions.
- Eurobrick provides its own 25 year product guarantee.

## TECHNICAL INFO

- The composite backer panel comprises an extruded polystyrene sheet with Eurobrick's high impact polystyrene ribbed skin pre-bonded to it. The horizontal ribs align and support the brick slips so that brick courses are formed accurately and easily.
- The insulated backer panel of X-Clad is closed cell extruded polystyrene with a BRE Green Guide Rating of A. It can be provided in a range of thicknesses to provide 17-100mm insulation. The thermal conductivity of the panel, the K-Value, is 0.033W/mK.
- Project specific U-Value calculations can be provided if required.
- We have a wide range of kiln fired clay brick slips available. These include both cut slips (Classic Range) and extruded slips (Britannia Range), please refer to our Product Guide for more information. All are FL Grade and suitable for most applications. Extruded brick slips use approximately 60-70% less energy to manufacture than traditional sized bricks, produce far less waste and can be transported more efficiently. Slips can be cut from other bricks to suit project requirements if the standard selection is not suitable.
- Pointing mortar is available in eight standard colours to complement or contrast with the chosen brick.

## INSTALLATION

X-Clad can be fixed to masonry, concrete, timber or light gauge steel framed walls, SIPS and ICF, with or without a drainable cavity. When fixing direct to stud frames, the studs must be positioned to meet the system fixing requirements.

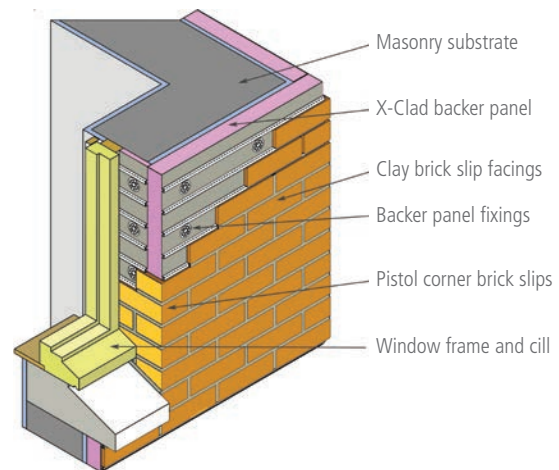

NB. Additional detail diagrams are available on our website or please refer to our Installation Guide. Please note that failure to fix in accordance with Eurobrick's instructions will invalidate the product guarantee.



1. The ribbed backing panel is fixed to the substrate. (Fixings vary according to substrate.)



2. Brick slips are attached with permanent bonding adhesive.



3. Specially formulated mortar is then piped into the brick joints.



4. Mortar is tooled in the manner of traditional pointing.



For technical queries or further advice on ordering please call +44 (0)117 971 7117



For more information please visit our website at [www.eurobrick.co.uk](http://www.eurobrick.co.uk)



## Proposed Facing Material 02




Reclaimed Yellow London Stock bricks, with mortar finish to resemble existing  
Final specification subject to batch availability



## Reference Project

Yorkton Street, Cassion Castle Architects, 2020

Reclaimed Yellow London Stock bricks, with mortar finish to resemble existing



Location: see 1:50 elevation

Early Mews  
Material Sheets  
Revision A  
30/04/2024




## Proposed Facing Material 03

Stratford Weathered Yellow Imperial Brick - mortar to finish to resemble existing



Example of installed brickwork



Location: see 1:50 elevation

Early Mews  
Material Sheets  
Revision A  
30/04/2024





# AMS SUPPLIES

## DECLARATION OF PERFORMANCE

### Stratford Yellow Imperial

Essential Characteristics	Performance	Harmonised Technical Specification
Dimensions & Tolerance	230mm x 105mm x 68mm Tolerance Tm Range Rm	BS EN 771 BS EN 771-1:2003
Colour	Yellow	
Compressive Strength-N/mm <sup>2</sup> (test normal to the bed face of the unit)	12 N/mm <sup>2</sup>	
Packaging	360 Packed on wooden pallets	
Approx. size of Pallets      Approx. Weight of Packed Pallets	42" x 42" x 29" 1000 KGS	
Water Absorption	20%	
Durability	F1	

The performance of the product is in conformity with the declared performance.  
This declaration of performance is issued under the sole responsibility of the manufacturer. Signed for and on the behalf of the manufacturer by Sufyan Amjad  
Managing Director **AMS SUPPLIES.**





## Existing Brickwork

Included for reference



## 7-8 Early Mews

Excerpts of existing brickwork along mews facade

