



- Wind loading calculations have been carried out based on site specific data and the building dimensions. Where modules have not been located within **Zones F & G** this is due to the project specific wind loading calculations.
- The **Green Line** identifies a **1000mm** boundary from the inside of the roof perimeter. This is the minimum distance BauderSOLAR PV panels should be installed from the roof edge.
- The **Magenta Line (where illustrated)** identifies an indicative mansafe system, or handrail, **1800mm** from the roof perimeter. Should this not be required please consult Bauder Ltd.
- Minimum **1000mm** has been allowed for around all roof access hatches, AOV's, upstands, mechanical plant etc. for maintenance purposes/access.
- * Numerous site specific factors can influence inverter specification. Inverters and optimisers specified are for guidance purposes only. MCS Accredited PV Contractor to confirm exact specification prior to installation.
- *1 Please note for Bauder Solar G Light ballast purposes a substrate weight of 1 metric tonne per m3 is assumed. For dry or wet weight of substrate please refer to the relevant datasheet.

Bauder Solar G Light - Aiko module

Key:

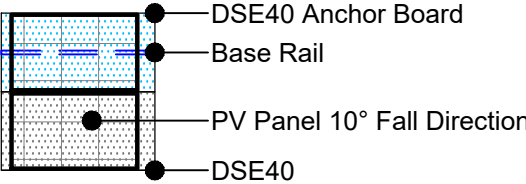

Windzones Key:

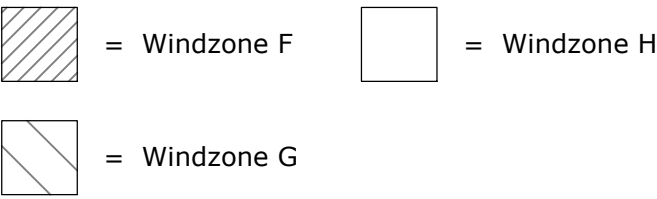

Important notice: Modules installed in zones F & G will be subject to significantly higher windloads than zone H. Where possible, all modules should be located minimum 1m from any roof plant, upstands or roof openings. Please contact Bauders technical office before re-locating any modules

Design Information

Short Mounting Rails:	9
Long Mounting Rails:	7
Type of Optimizer:	N/A
Area of PV Panels:	39.04 m2

General Information

Total power DC:	9.1 kWp
BAUDER System type:	Bauder Solar G Light
Module type:	AIKO-A-MAH54Mw (455wp)
Module amount:	20 Units
Azimuth:	39 Degrees SE

All Dimensions, positions of Rooflights and Outlets/SVP's/mansafe systems are to be checked on site **by the installing contractor** for clashes **BEFORE** the PV design is ordered.

Rev	Date	Description	Drawn By



UK OFFICE
Bauder Limited
70 Landseer Road, Ipswich,
Suffolk IP3 0DH,
England.
Tel: +44 (0)1473 257671
Fax: +44 (0)1473 230761
Email: technical@bauder.co.uk
bauder.co.uk

IRELAND OFFICE
Bauder Limited
O'Duffy Centre, Cross Lane,
Carrickmacross, Co. Monaghan,
Ireland.
Tel: +353 (0)42 9692 333
Fax: +353 (0)42 9692 839
Email: technical@bauder.ie
bauder.ie

Installing contractor is responsible for checking this scheme against architects drawings/site requirements and to advise Bauder immediately of any discrepancies. Orders placed against this drawing reference assume approval of this scheme. Any materials required over and above the quantities given, will be charged accordingly.

Contract Name:
Bird in Hand, West End Lane, London, Middlesex,
NW6 4NX

Bauder Solar G Light PV Layout Plan

Contract No:	B235931/1		
Drawing No:	B235931PV - 20240319		
Designed to Drawing No:	-008-MET-XX-05-DR-206-S0-P02		
Scale:	N.T.S		
Drawn By:	CD	Date:	19.03.24

Roof Area Name:	Roof Height:	Membrane Type:	No. Panels:	No. Mounts:	No. Weld Sleeves:	Inverter Type 1: See Note Above *	Inverter Type 2: See Note Above *
Main Roof	6m (TBC)	BTGRS	20	20	N/A	SOL-8.0-5G-DT-DC x1	-
-	-		-	-	-	-	-
Total Parts Required:	-	-	20	20	N/A		

Required Ballast In Kg/m² & mm Depth *1:

