



### AVR 1 – Outline



Example of AVR 1 confirming degree of visibility (in this case as an occluded 'wire-line' image)

A1.18 The purpose of a wire-line view is to accurately indicate the location and degree of visibility of the Proposed Development in the context of the existing condition and potentially in the context of other proposed schemes.

A1.19 In AVR1 representation each scheme is represented by a single line profile, sometimes with key edges lines to help understand the massing. The width of the profile line is selected to ensure that the diagram is clear, and is always drawn inside the true profile. The colour of the line is selected to contrast with the background. Different coloured lines may be used in order to distinguish between proposed and consented status, or between different schemes.

A1.20 Where more than one scheme is represented in outline form the outlines will obscure each other as if the schemes were opaque. Trees or other foliage will not obscure the outline of schemes behind them. This is because the transparency of trees varies with the seasons, and the practical difficulties of representing a solid line behind a filigree of branches. Elements of a temporary nature (e.g. cars, tower cranes, people) will similarly not obscure the outlines.

#### Framing the view

A1.21 Typically AVRs are composed with the camera looking horizontally i.e. with a horizontal Optical Axis. This is in order to avoid converging verticals which, although perspective correct, appear to many viewers as unnatural in print form. The camera is levelled using mechanical levelling devices to ensure the verticality of the Picture Plane, being the plane on to which the image is projected; the film in the case of large format photography or the CCD in the case of digital photography.

A1.22 For a typical townscape view, a Landscape camera format is usually the most appropriate, giving the maximum horizontal angle of view. Vertical rise may be used in order to reduce the proportion of immediate foreground visible in the photograph. Horizontal shift will not be used. Where the prospect is framed by existing buildings, portrait format photographs may be used if this will result in the proposal being wholly visible in the AVR, and will not entirely exclude any relevant existing buildings.

A1.23 Where the Proposed Development would extend off the top of the photograph, the image may be extended vertically to ensure that the full height of the Proposed Development is shown. Typically images will be extended only where this can be achieved by the addition of sky and no built structures are amended. Where it is necessary to extend built elements of the view, the method used to check the accuracy of this will be noted in the text.


#### Documenting the AVR

##### Border annotation

A1.24 A Millerhale AVR image has an annotated border or 'graticule' which indicates the field of view, the optical axis and the horizon line. This annotation helps the user to understand the characteristics of the lens used for the source photograph, whether the photographer applied tilt, vertical rise or horizontal shift during the taking of the shot and if the final image has been cropped on one or more sides.

A1.25 The four red arrows mark the horizontal and vertical location of the 'optical axis'. The optical axis is a line passing through the eye point normal to the projection plane. In photography this line passes through the centre of the lens, assuming that the film plane has not been tilted relative to the lens mount. In computer rendering it is the viewing vector, i.e. the line from the eye point to the target point.

A1.26 If the point indicated by these marks lies above or below the centre of the image, this indicates either that vertical rise was used when taking the photograph or that the image has subsequently been cropped from the top or bottom edge. If it lies to the left or right of the centre of the image then cropping has been applied to one side or the other, or more unusually that horizontal shift was applied to the photograph.

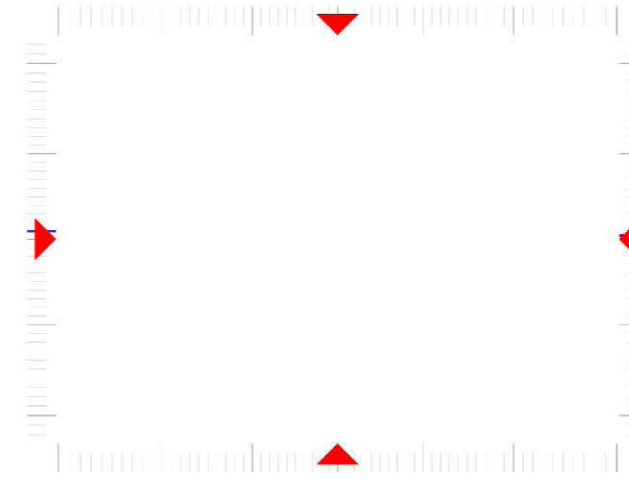


Sample graticule showing optical axis markers

A1.27 The vertical and horizontal field of view of the final image is declared using a graticule consisting of thick lines at ten degree increments and intermediate lines every degree, measured away from the optical axis. Using this graticule it is possible to read off the resultant horizontal and vertical field of view, and thereby to compare the image with others taken using specific lens and camera combinations. Alternatively it can be used to apply precise crops during subsequent analysis

A1.28 .

A1.29 The blue marks on the left and right indicate the calculated location of the horizon line i.e. a plane running horizontally from the location of the camera. Where this line is above or below the optical axis, this indicates that the camera has been tilted; where it is not parallel with the horizontal marking of the optical axis, this indicates that the camera was not exactly horizontal, i.e. that "roll" is present. Note that a small amount of tilt and roll is nearly always present in a photograph, due to the practical limitations of the levelling devices used to align the camera in the field.

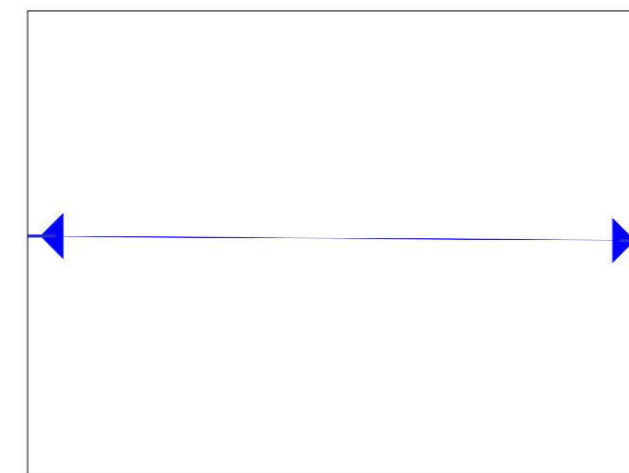

Sample graticule showing horizon line markers

#### Comparing AVRs with different FOVs

A1.30 A key benefit of the index markings is that it becomes practical to crop out a rectangle in order to simulate the effect of an image with a narrower field of view. In order to understand the effect of using a longer lens it is simply necessary to cover up portions of the images using the graticule as a guide.

