




A heavy duty vertical sliding unit supported on specialist balances allowing treatment of very large sash windows. Thicker glass offers higher levels of noise insulation and with secure locking it is accredited to Secured by Design.

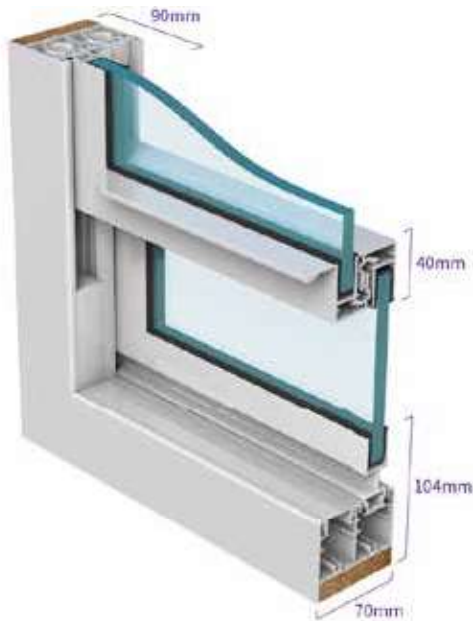

FEATURES

- Recessed finger pull on lower sash allows contra-sliding to assist with cleaning
- Integral interlock handle to upper sash
- 40mm wide interlock stile
- Twin brush seals ensure high sealing efficiency
- Fixings concealed within the frame - trims not required
- Sashes are removable by specialists to allow maintenance
- Frames may be linked with a colour matched aluminium transom/mullion section

DIMENSIONS

Recommended maximum frame

Format	Height (mm)	Width (mm)
2 PANES	3600	2000

Maximum sash (h)1800mm x (w)2000mm, minimum sash (h)400mm x (w)400mm

Overall dimensions are subject to a maximum sash weight of 65kg and minimum of 4kg

Sash height to width ratio should not normally exceed 1:3

A minimum frame to frame gap of 75mm is recommended for access to the outer window

FRAME COLOUR

Stock finish is white HIPCA 9910 semi-gloss

Any standard powder paint, wood grain finish or anodised finish to order

OPTIONS

Glazing	6mm to 12.8mm
Frames	Curved heads – minimum radius 700mm
Ironmongery	H17 Cranked 'D' handle to upper sash
(see page 44/45)	L21/H26 Multipoint lock
	L22/H26 Multipoint lock (SBD/EXV33)