

PLANNING

LEGEND

--- Line type indicates existing walls, partitions, doors, fixtures and fittings to be carefully removed, and all affected surfaces made good.

Line type indicates existing timber partitions, doors, fixtures and fittings to be carefully relocated, and all affected surfaces made good.

Line type indicates high level glazed

partitions to be removed, while existing low level partitions and doors to be carefully retained and all surfaces made good.

Note: External fabric of building incorporating all masonry, stone, glazing, and all load bearing and structural elements to be retained and protected during works.

GENERAL
To be read in conjunction with MFR specification

TO be read in conjunction with MEP specifications and drawings, removal of any structural, mechanical, or electrical items should only be carried out following investigation as outlined by SE/MEP specifications and following direct instruction by the project manager.

OFFICE AREAS
Timber screens/partitions - unless otherwise

be evaluated for the potential future reuse/storage by the client.

Timber screens/partitions - unless otherwise specified to be retained and protected during duration of the works.

Fixture and fittings - All existing trunking to be removed. Remove all kitchen units on the fourth floor and cap services. All FCUs, grilles and boxing to be removed. All lighting to be removed.

Doors - Existing doors to be retained and protected during strip out works, unless otherwise noted. Brass Ironmongery on original timber doors to be retained. Stainless steel ironmongery to modern doors to be removed.

WCs - All existing sanitaryware and vanity units to be removed.

Existing timber panels to be assessed for reuse.

All existing cistern housings/IPS access panels to be removed.

All existing floor finishes to be stripped out and replaced. All ceilings and fittings to be stripped.

All existing floor finishes to be stripped out and replaced. All ceilings and fittings to be stripped.

Existing staircase, metal balustrade and terrazzo to treads and risers to be retained and protected during strip out works.

to treads and risers to be retained and protected during strip out works.

Existing lift to be retained and protected during strip out works. Floor finish to be removed.

Existing lift to be retained and protected during strip out works. Floor finish to be removed.


Emergency light fittings to be retained.
All other light fittings to be removed, inc. wall
lights to main staircore.

All other light fittings to be removed, inc. wall lights to main staircore.


Strip out works to be undertaken in accordance with MEP drawings and specifications

Strip out works to be undertaken in accordance with MEP drawings and specifications

A full photographic survey of the building is to be provided on completion of the stripping out work and issued to the CA with references for the location photographs

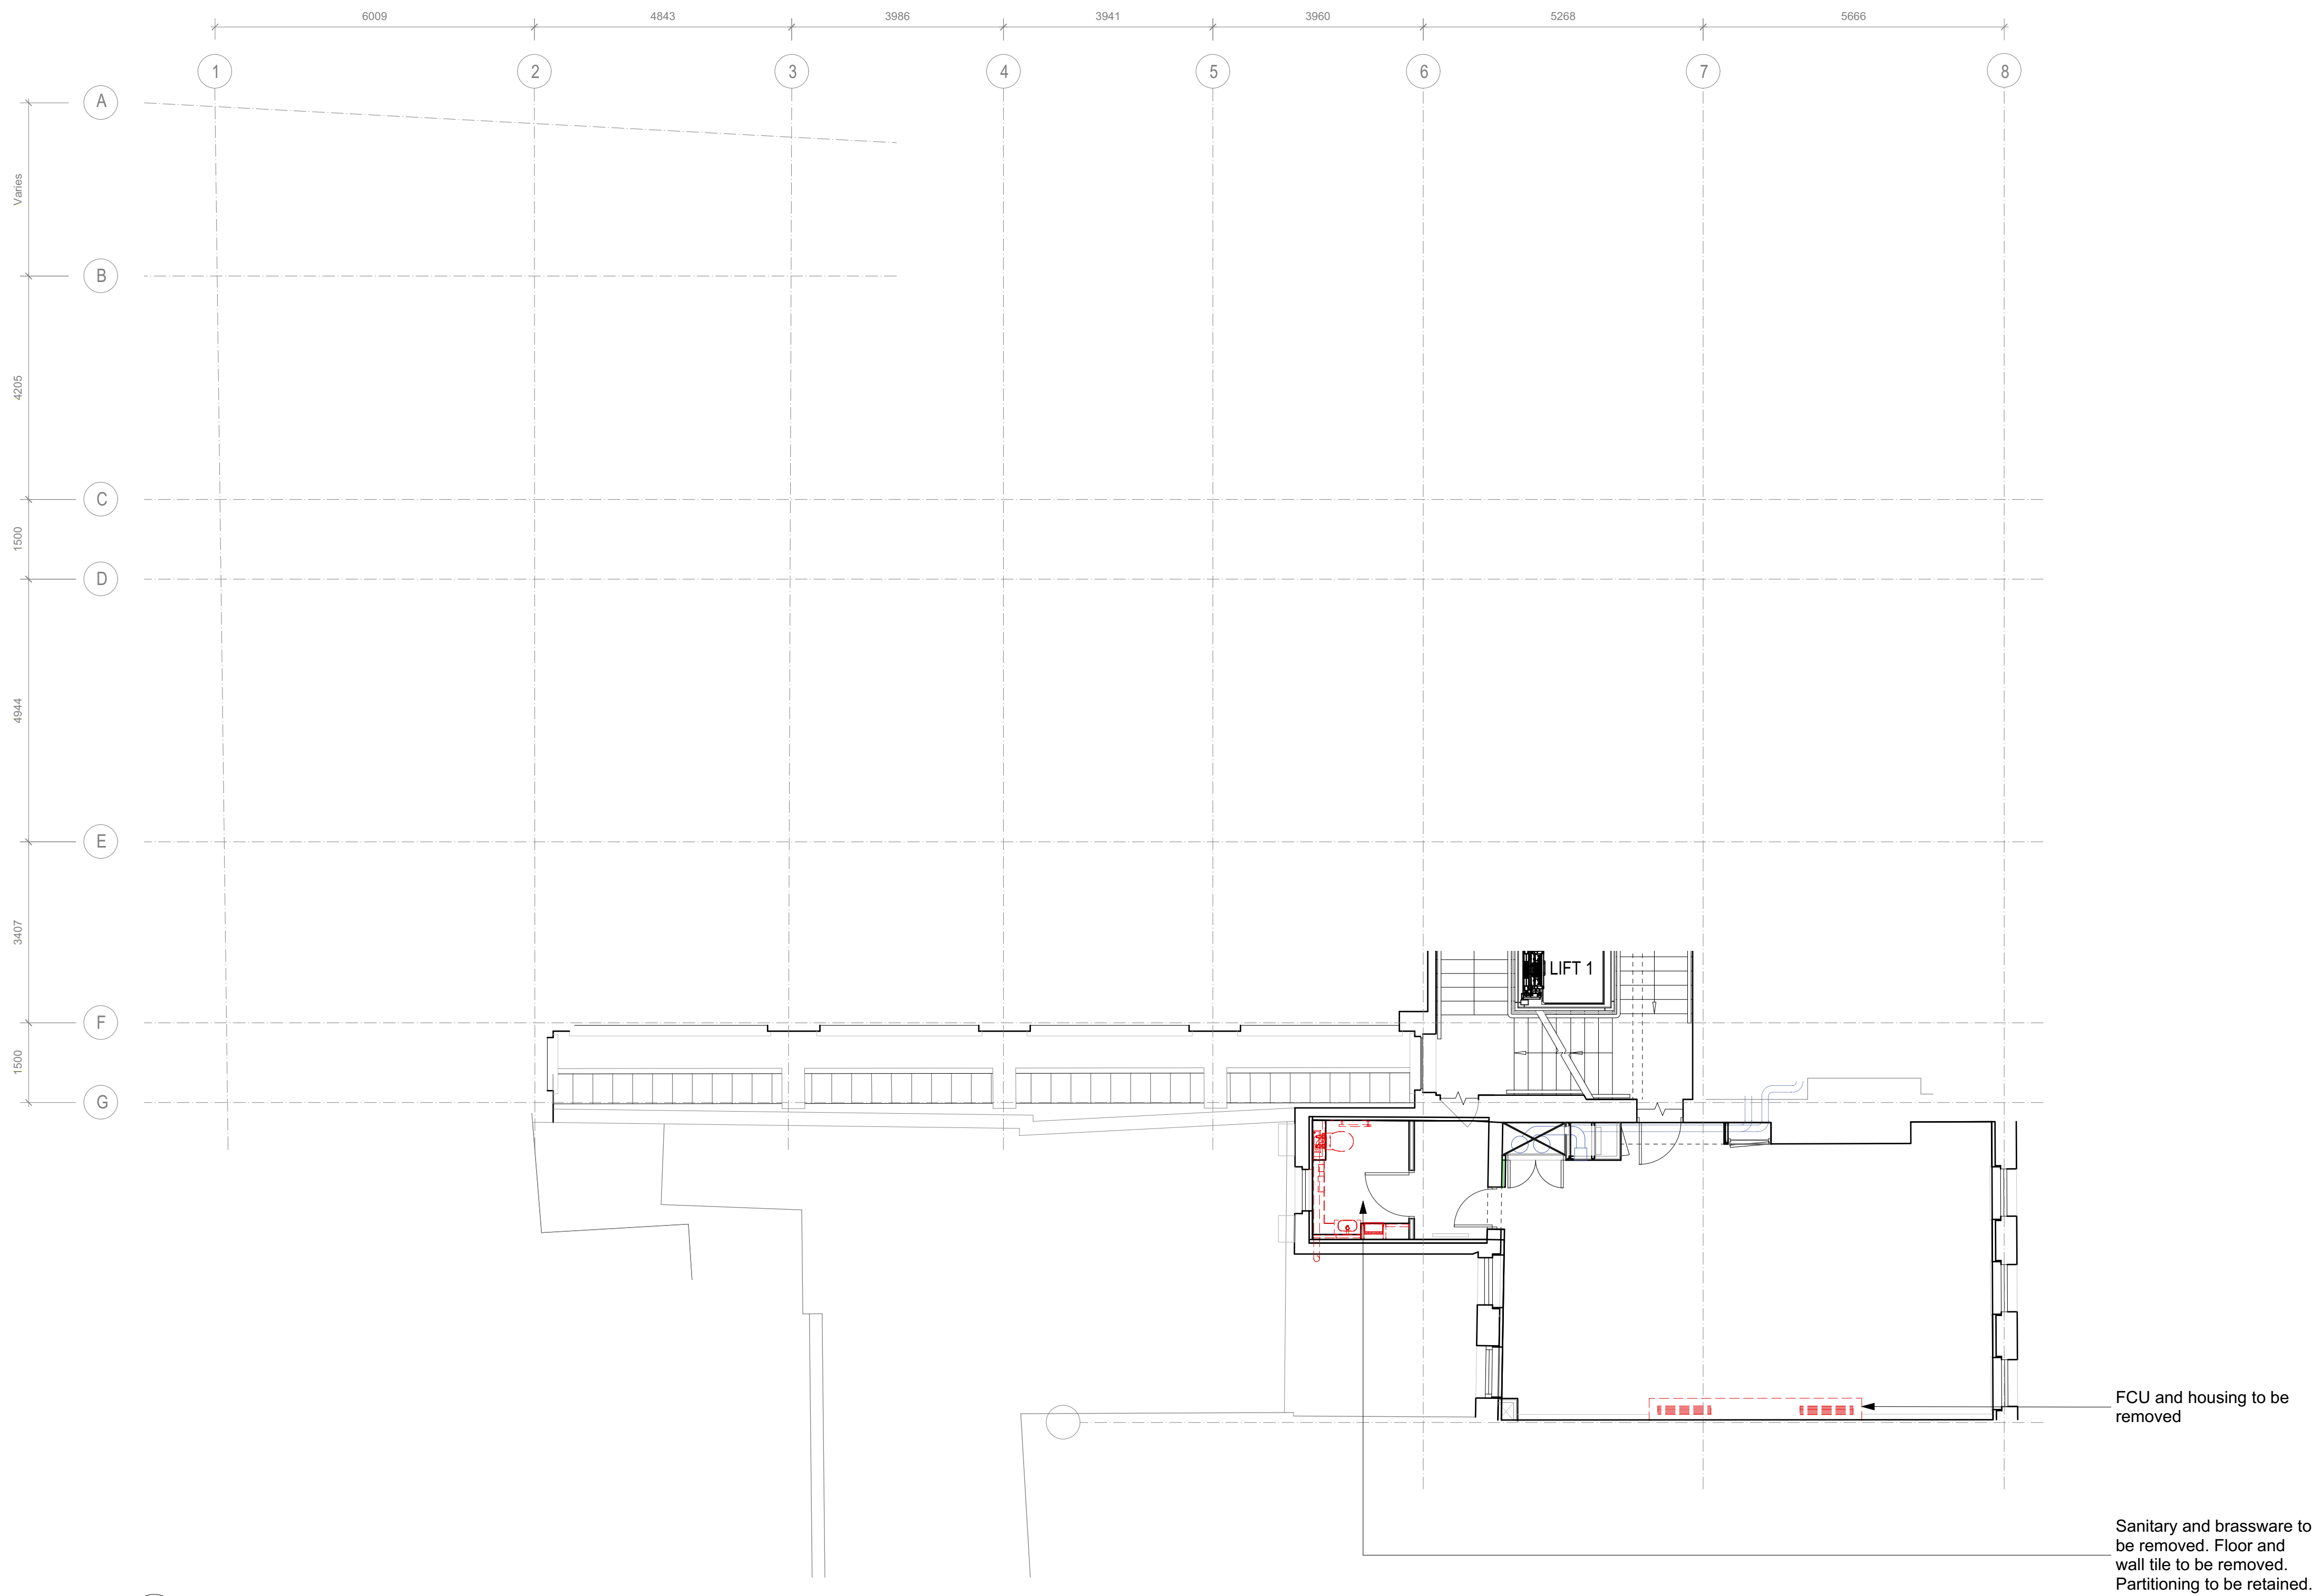

1 Second Floor Mezzanine Demolition Plan
1:75 @ A1

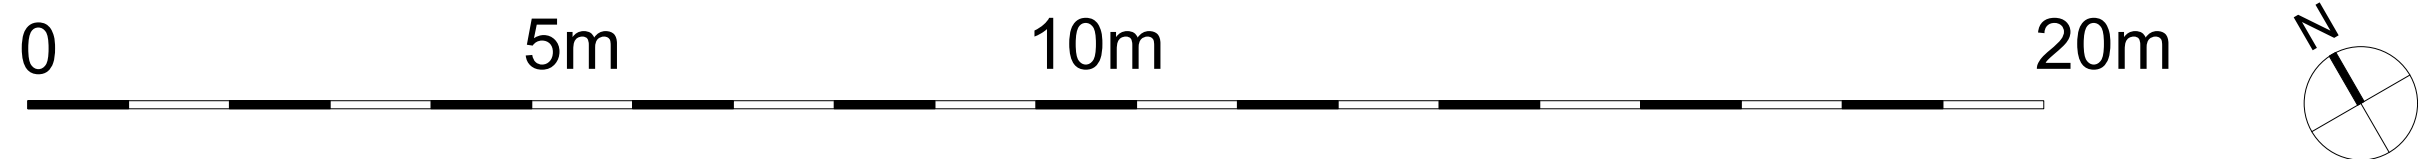

<p>All dimensions to be checked on site prior to commencement of any works, and/or preparation of any shop drawings.</p> <p>Sizes of and dimensions to any structural or services elements are indicative only. See structural and service engineers drawings for actual sizes / dimensions.</p> <p>This drawing to be read in conjunction with all other Architect's drawings, specifications and other Consultants' information.</p> <p>All proprietary systems shown on this drawing are to be installed strictly in accordance with the Manufacturer/Suppliers recommended details.</p> <p>Any discrepancies between information shown on this drawing and any other contract information or manufacturer/suppliers recommendations is to be brought to the attention of the Architect.</p>	Revision PL1	Date 30/11/2023	Amendment Issued for Planning	<table><tr><td>Date March 2023</td><td colspan="2">Project 31 Great Queen Street</td><td>Job Ref. 433</td></tr><tr><td>Scale 1:75@A1</td><td>Drawn JM</td><td>Check MH</td><td>Title Proposed Demolition Second Floor Mezzanine Plan</td></tr><tr><td>Status PLANNING</td><td colspan="2">Client Ref MCF</td><td>Drwg. no. 433(DE)102M</td><td>Rev. PL1</td></tr><tr><td colspan="5">Hale Brown Architects Ltd. Unit 1.04, Edinburgh House, 170 Kennington Lane, London, SE11 5DP</td></tr><tr><td colspan="5">T: 020 3735 7442 E: mail@halebrown.com W: www.halebrown.com</td></tr></table>				Date March 2023	Project 31 Great Queen Street		Job Ref. 433	Scale 1:75@A1	Drawn JM	Check MH	Title Proposed Demolition Second Floor Mezzanine Plan	Status PLANNING	Client Ref MCF		Drwg. no. 433(DE)102M	Rev. PL1	Hale Brown Architects Ltd. Unit 1.04, Edinburgh House, 170 Kennington Lane, London, SE11 5DP					T: 020 3735 7442 E: mail@halebrown.com W: www.halebrown.com				
	Date March 2023	Project 31 Great Queen Street		Job Ref. 433																										
	Scale 1:75@A1	Drawn JM	Check MH	Title Proposed Demolition Second Floor Mezzanine Plan																										
	Status PLANNING	Client Ref MCF		Drwg. no. 433(DE)102M	Rev. PL1																									
	Hale Brown Architects Ltd. Unit 1.04, Edinburgh House, 170 Kennington Lane, London, SE11 5DP																													
T: 020 3735 7442 E: mail@halebrown.com W: www.halebrown.com																														

