




Awareness of below ground services and waste runs must be determined through an adequate site survey prior to determining designation of storage areas and loaded structures.

All trees to have physical root compression exclusion zones installed and maintained throughout the works.

Access routes for materials to secured storage areas to be surveyed for the presence of vulnerable or dangerous services runs and secured from resident or public access.

Site access crosses public pavements - procedures for ensuring monitoring of all site access needs to be in place for the duration of the works.

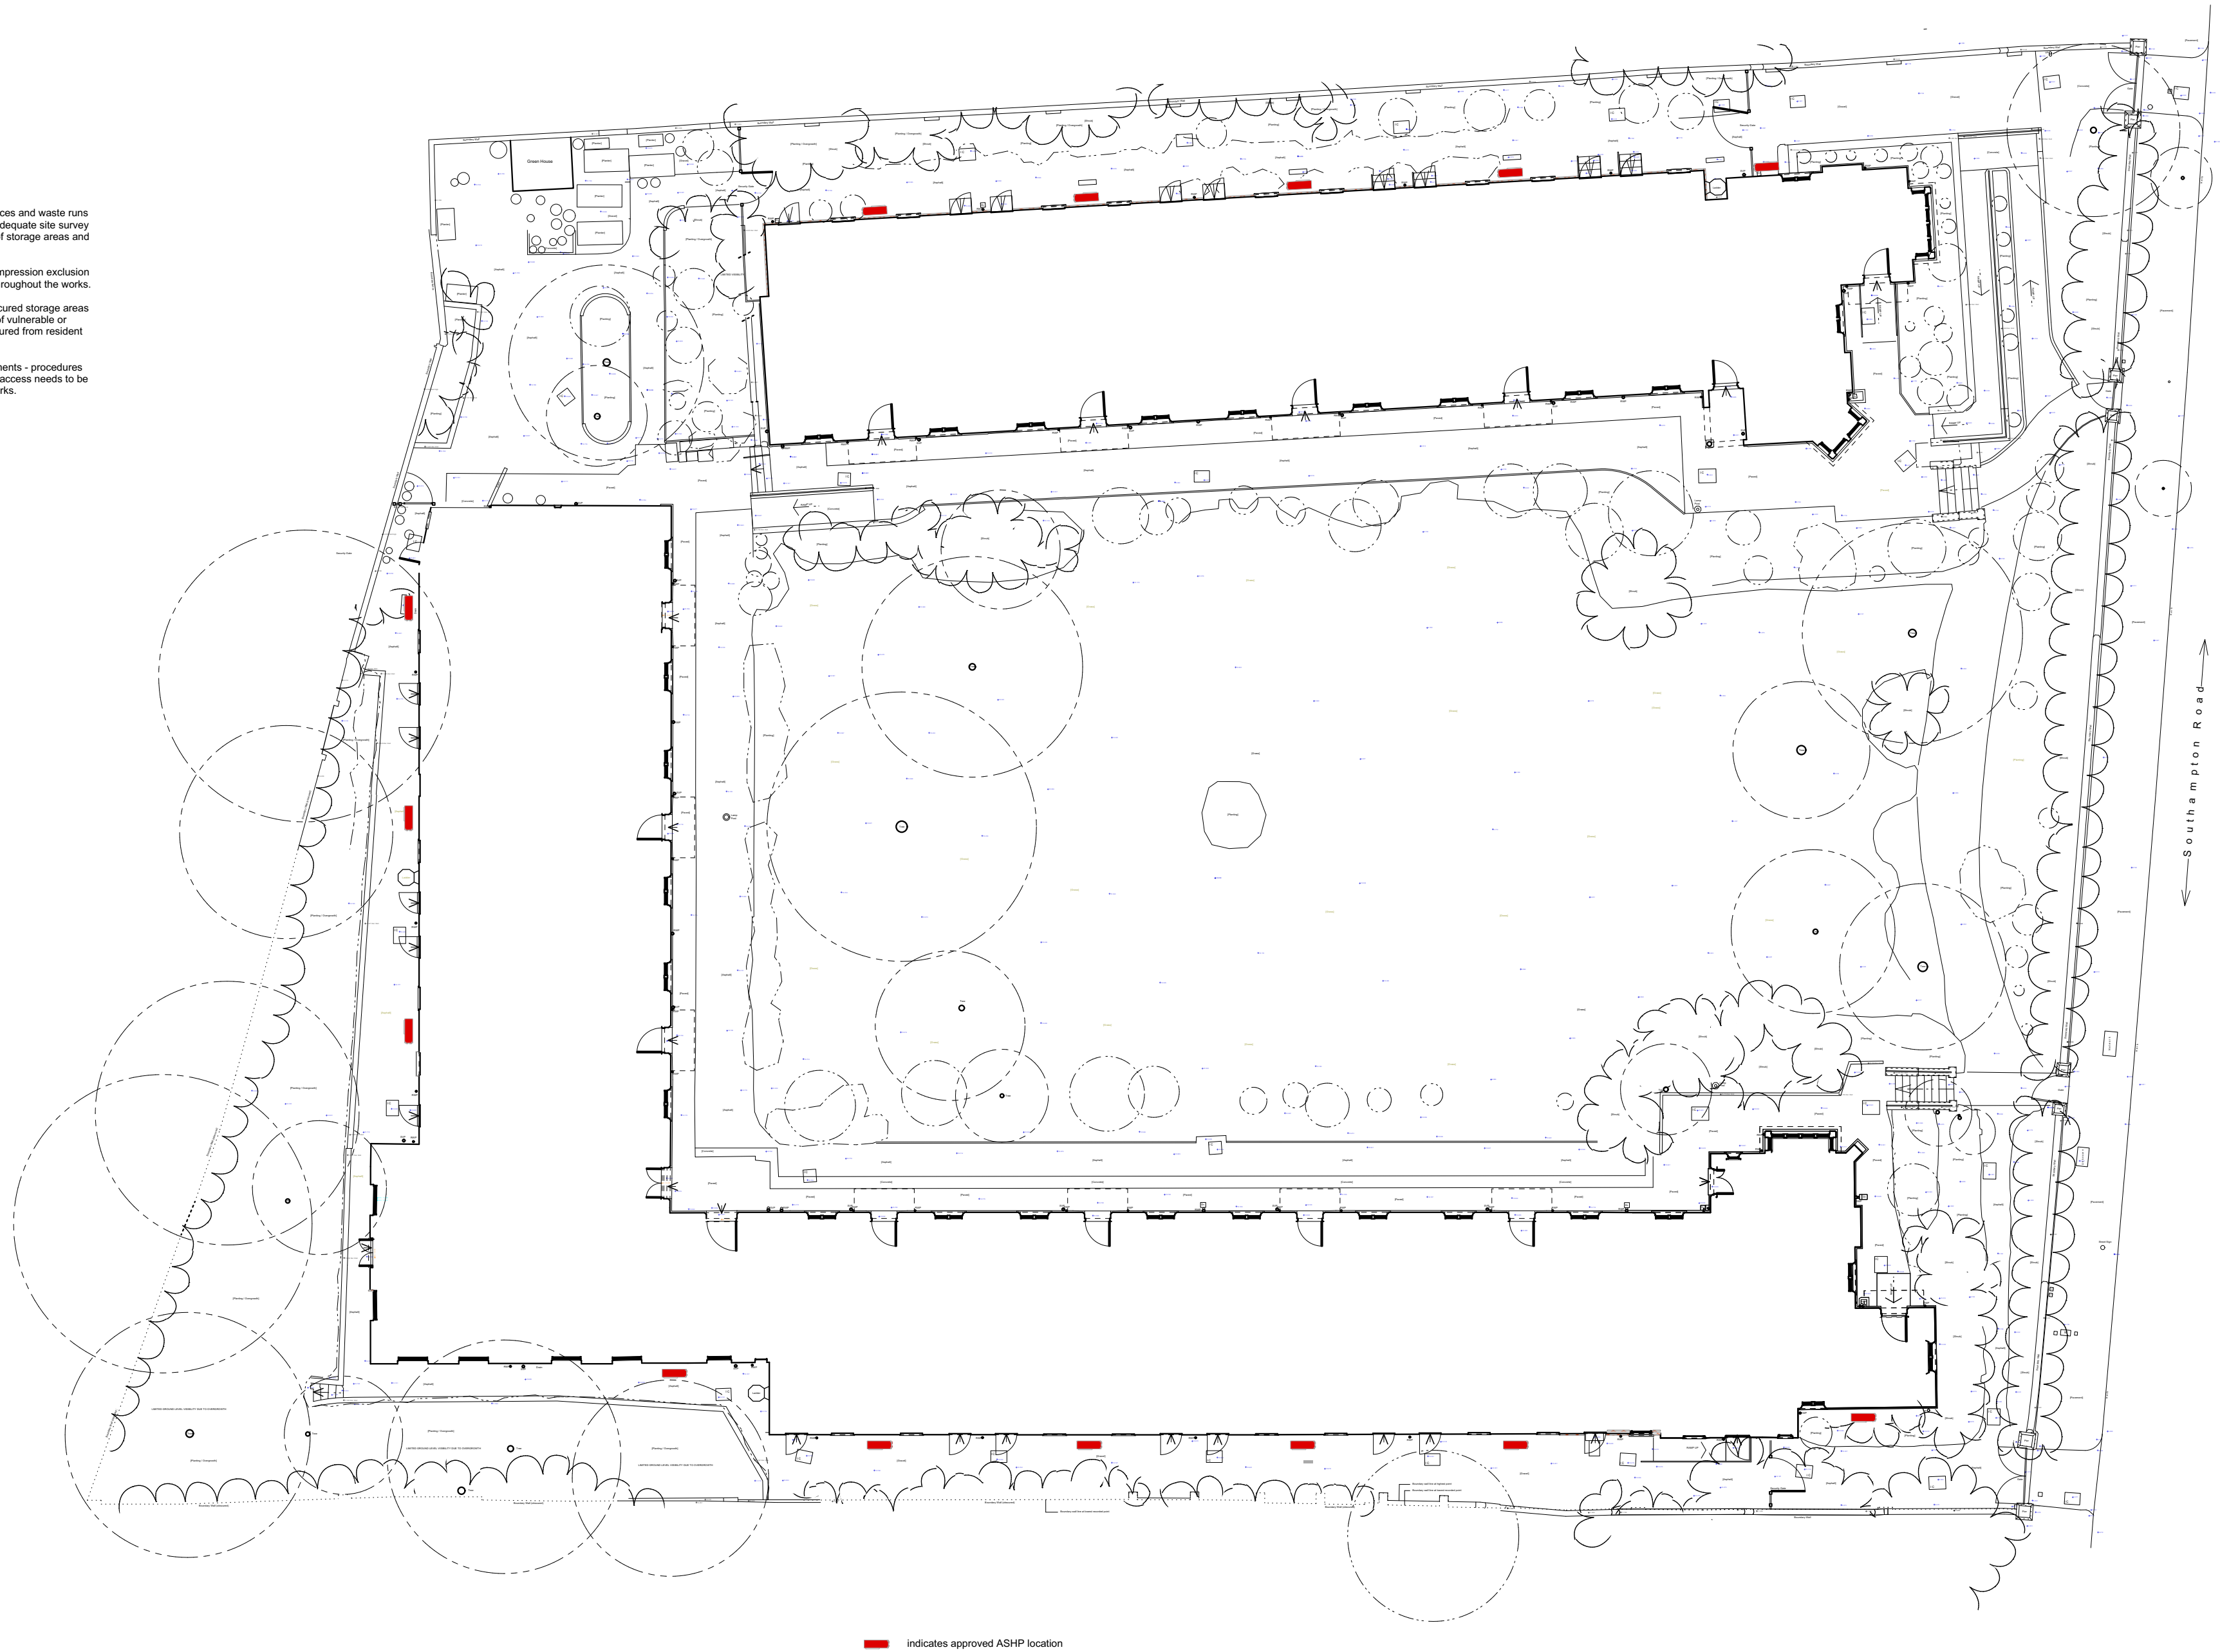

■ indicates approved ASHP location

