

"Steep Pitched Green Roof" with Georaster®

Detail:

Eaves with Eaves Profile and Shear-Fix LF 600

System build-up

- 1.1 Pre-cultivated Vegetation Mat "Sedum Carpet"
- 1.2 Infill with System Substrate "Heather with Lavender-Light" (ca. 10 mm above Georaster®-Elements)
- 1.3 Georaster®-Elements
- 1.4 Protection Mat WSM 150
- 1.5 Roof construction with root resistant waterproofing

Note:

The detailed solution shown here refers mainly to the ZinCo System Build-up. The roof construction itself as well as any other constructions are shown schematically and must be planned according to the relevant standards and guidelines.

Project:

-

Version:

03.07.2019 JGI/ JGI

Reviewed:

-


Scale:

none

Size:

A 4

Trauf04_Srd_Geor_Srd30.dwg

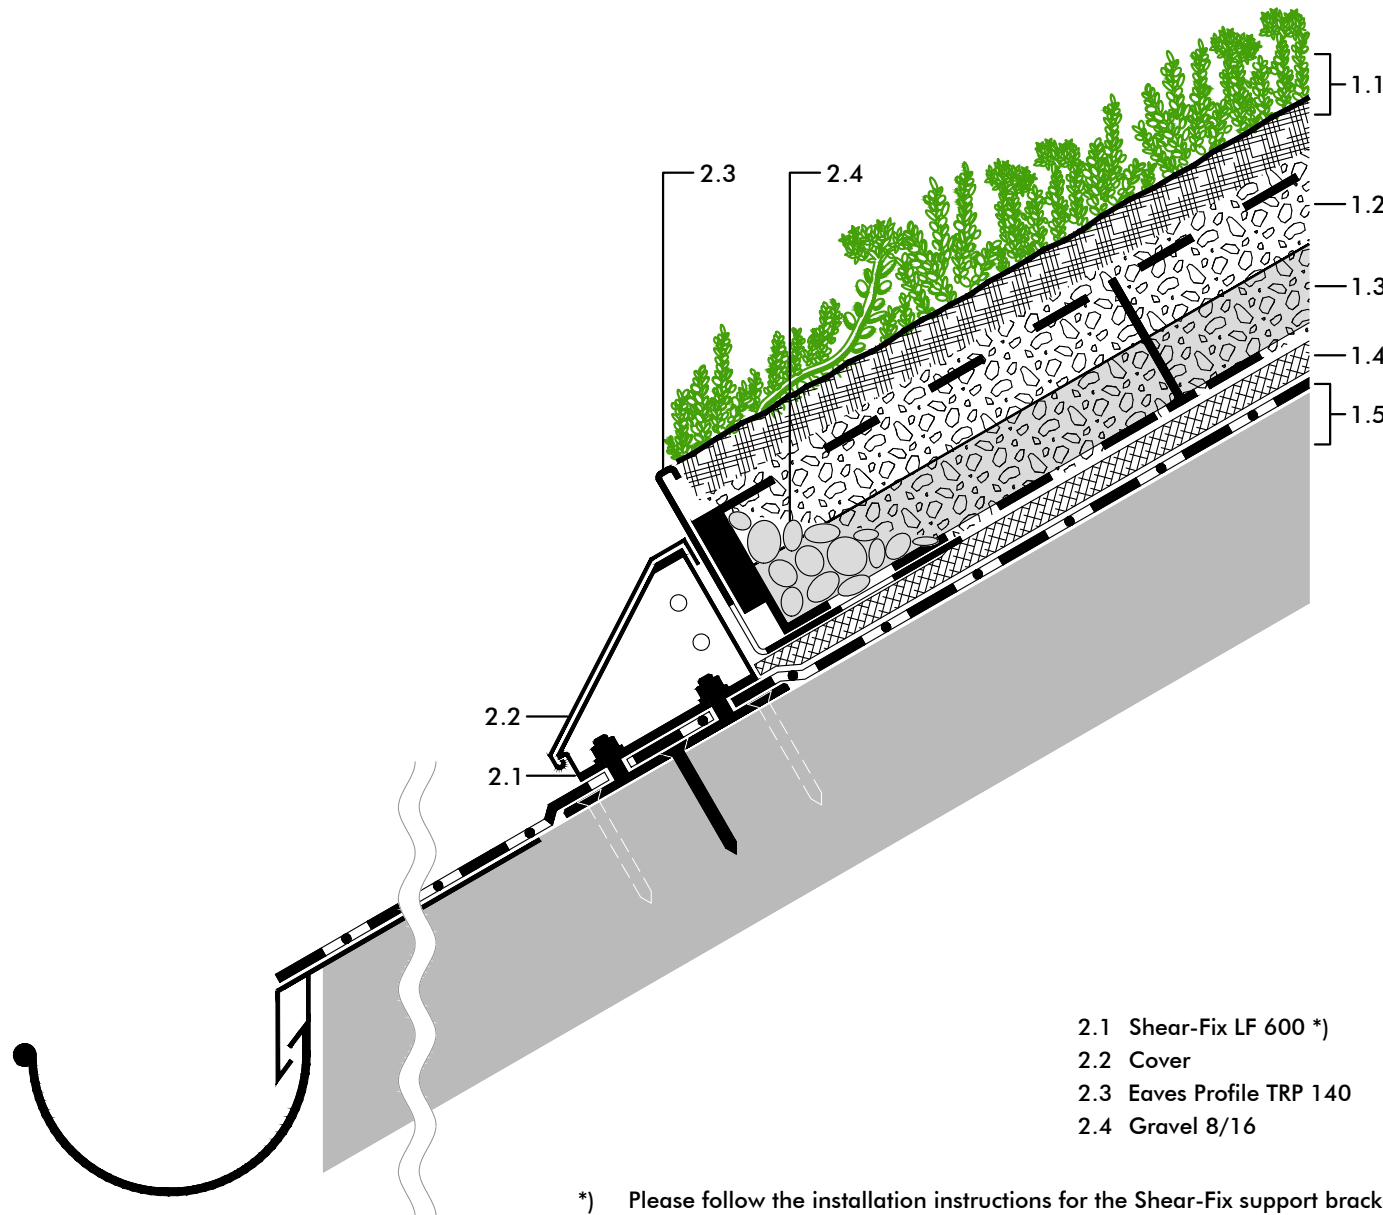

- 2.1 Shear-Fix LF 600 *)
- 2.2 Cover
- 2.3 Eaves Profile TRP 140
- 2.4 Gravel 8/16

*) Please follow the installation instructions for the Shear-Fix support bracket.

Authorized by ZinCo GmbH, Lise-Meitner-Str. 2,
72622 Nuertingen/ Germany; Tel: ++49/7022-6003-0
info@zinco-greenroof.com; www.zinco-greenroof.com

Subject to technical alterations and printing errors.

