


FIRST BASE Ground Screw Ø76 x 1000mm - M16

Appendix C



Art. No:	11041		
Weight:	6,0 kg		
Dimensions:	Pipe: 76,1 x 2,6 x 1000 mm Flange: 8,0 x 200 mm		
Materials:	Steel grade Pipe: S235 Steel grade Flange: S355 Surface treatment: Galvanized acc. to EN-ISO 1461		
Installation:	Electric machine 5.000Nm	Art.No: 12001	
	Pneumatic machine 10.800Nm	Art.No: 12005	
	Hydraulic machine 7.500Nm	Art.No: 120950	
	Hydraulic machine 12.000Nm	Art.No: 120960	
Use:	Light construction e.g. porches, garden rooms and modular homes.		
Fixation:	M16 , M12 , M10 Bolts		
Products to combine:			
17021 - POLEHOLDER M20			
17022 - L-BRACKET M16 - L-180x202x80x8mm			
17024.1 - L-BRACKET M16 - L-120x80x105mm			
17042 - ALUMINUM FILLER PLATE			
70101 - FLANGEPLATE ENLARGER 12x300x300mm 8xM12 (S355)			
70111 - STEEL SHIM 2x200mm FOR ROUND FLANGE 8x200mm			
70112 - STEEL SHIM 5x200mm FOR ROUND FLANGE 8x200mm			
Click here for the FIRST BASE Load Capacity Chart			

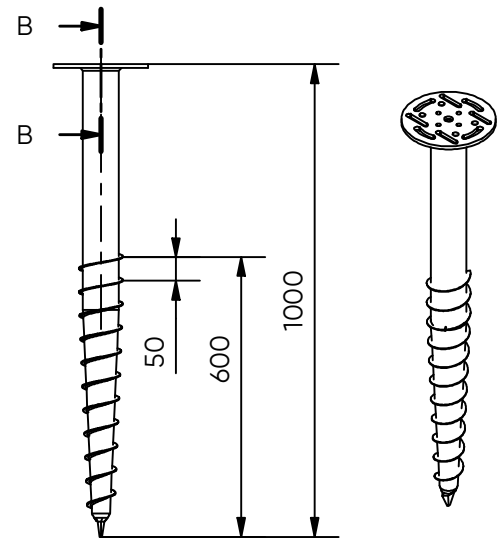

Side view (1 : 16)

3D view (1 : 16)

