


Demolition Scope of Works

- Dumbwaiters as approved and installed as part of the base build consented scheme to be removed.
- Stud partitions and doors as approved and installed as part of the base build consented scheme, to be removed to allow for alterations to the basement Back of House and ancillary spaces.
- Bike storage rack to be removed to enable connection between Camden Centre Back of House and B.11. (Note: quantity of bike storage provision will not fall below planning condition requirement of 62 spaces). Rearrangement of racks to suit new layout.
- New builders works holes to be formed in slab to allow for services risers from basement to serve the Camden Centre with high level openings in masonry walls above ceiling line for horizontal distribution.
- Internal door to be removed to allow for acoustic upgrade.
- Partition to be removed to allow for back stage alterations.
- Minor alterations to stair arrangement of newly formed gallery platform
- Alterations to historic ceiling to allow for AV/Lighting rigging installation. 600x600mm openings formed for installing structural supports into L03 slab and services infrastructure - ceiling reinstated to match existing with 150mm diameter flush finished cover plates introduced
- Removal of non-original proscenium arch
- Removal of non-original glitter ball
- Removal and reconfiguration of terrazzo cubicle partitions to increase WC capacity. Terrazzo partitions to be reinstated where possible
- Column encasement removed and steel work treated for fire protection.
- Original walls demolished / doors removed and relocated for revised Back of House arrangement
- Consented but not built - Tonbridge Walk entrance lobby stairs, platform and screen arrangement to be revised
- Decorative soffit mouldings to be taken down and reinstated below new lowered bulkhead introduced for supply air distribution slot grille
- Section of ceiling to be taken down for installation of ventilation ductwork with new ceiling installed
- Portable timber stairs to be removed and stored on site
- Consented but not built - raised handrail design to be revised
- 50mm slot cut into masonry for supply air distribution
- New door opening from lobby G.44 into Stair A to match opening into Stair B
- Non-original door removed and opening in non-original partition enlarged

Proposed Works Key

- Proposed Element
- Demolition Element
- Demolition Overhead
- Consented but not built
- Temporary Element
- Area not included within application
- Window Number
- Door Number




|     |          |    |     |             |
|-----|----------|----|-----|-------------|
| C01 | 02.02.24 | TF | OB  | First Issue |
| REV | DATE     | BY | CHK | DESCRIPTION |

CLIENT  
**Il Bottaccio**

PROJECT  
**Camden Town Hall Tenant Fitout**

JOB NUMBER  
**242931**

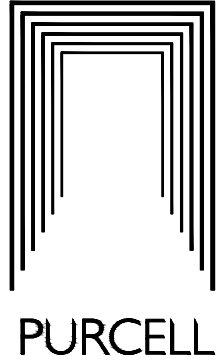

TITLE  
**DEMOLITION GROUND FLOOR PLAN**

SIZE SCALE  
A1L 1:200

REV SUITABILITY/REASON FOR ISSUE  
**C01 A3 - Spatial Coordination Approved**

DRAWING NUMBER  
**242931-PUR-01-GF-DR-A-9101**