


Beam Schedule		
Beam Reference	Beam Dimensions	Beam Material
S2	150x90x24PFC	Steel(S355)

Column Schedule		
Column Reference	Column Dimensions (mm x mm)	Column Material
C1	225x500	Concrete C35/45
C2	225x750	Concrete C35/45
C3	250x900	Concrete C35/45
C4	250x1000	Concrete C35/45
C5	250x1250	Concrete C35/45
C6	250x500	Concrete C35/45
C7	300x1300	Concrete C35/45
S1	203x203 UKC46	Steel (S355)

All proposed RC walls to be 225mm thick C35/45 concrete

- Denotes 225mm thick concrete flat slab,u.n.o
-

Denotes Proprietary Cast-In Thermal Breaks

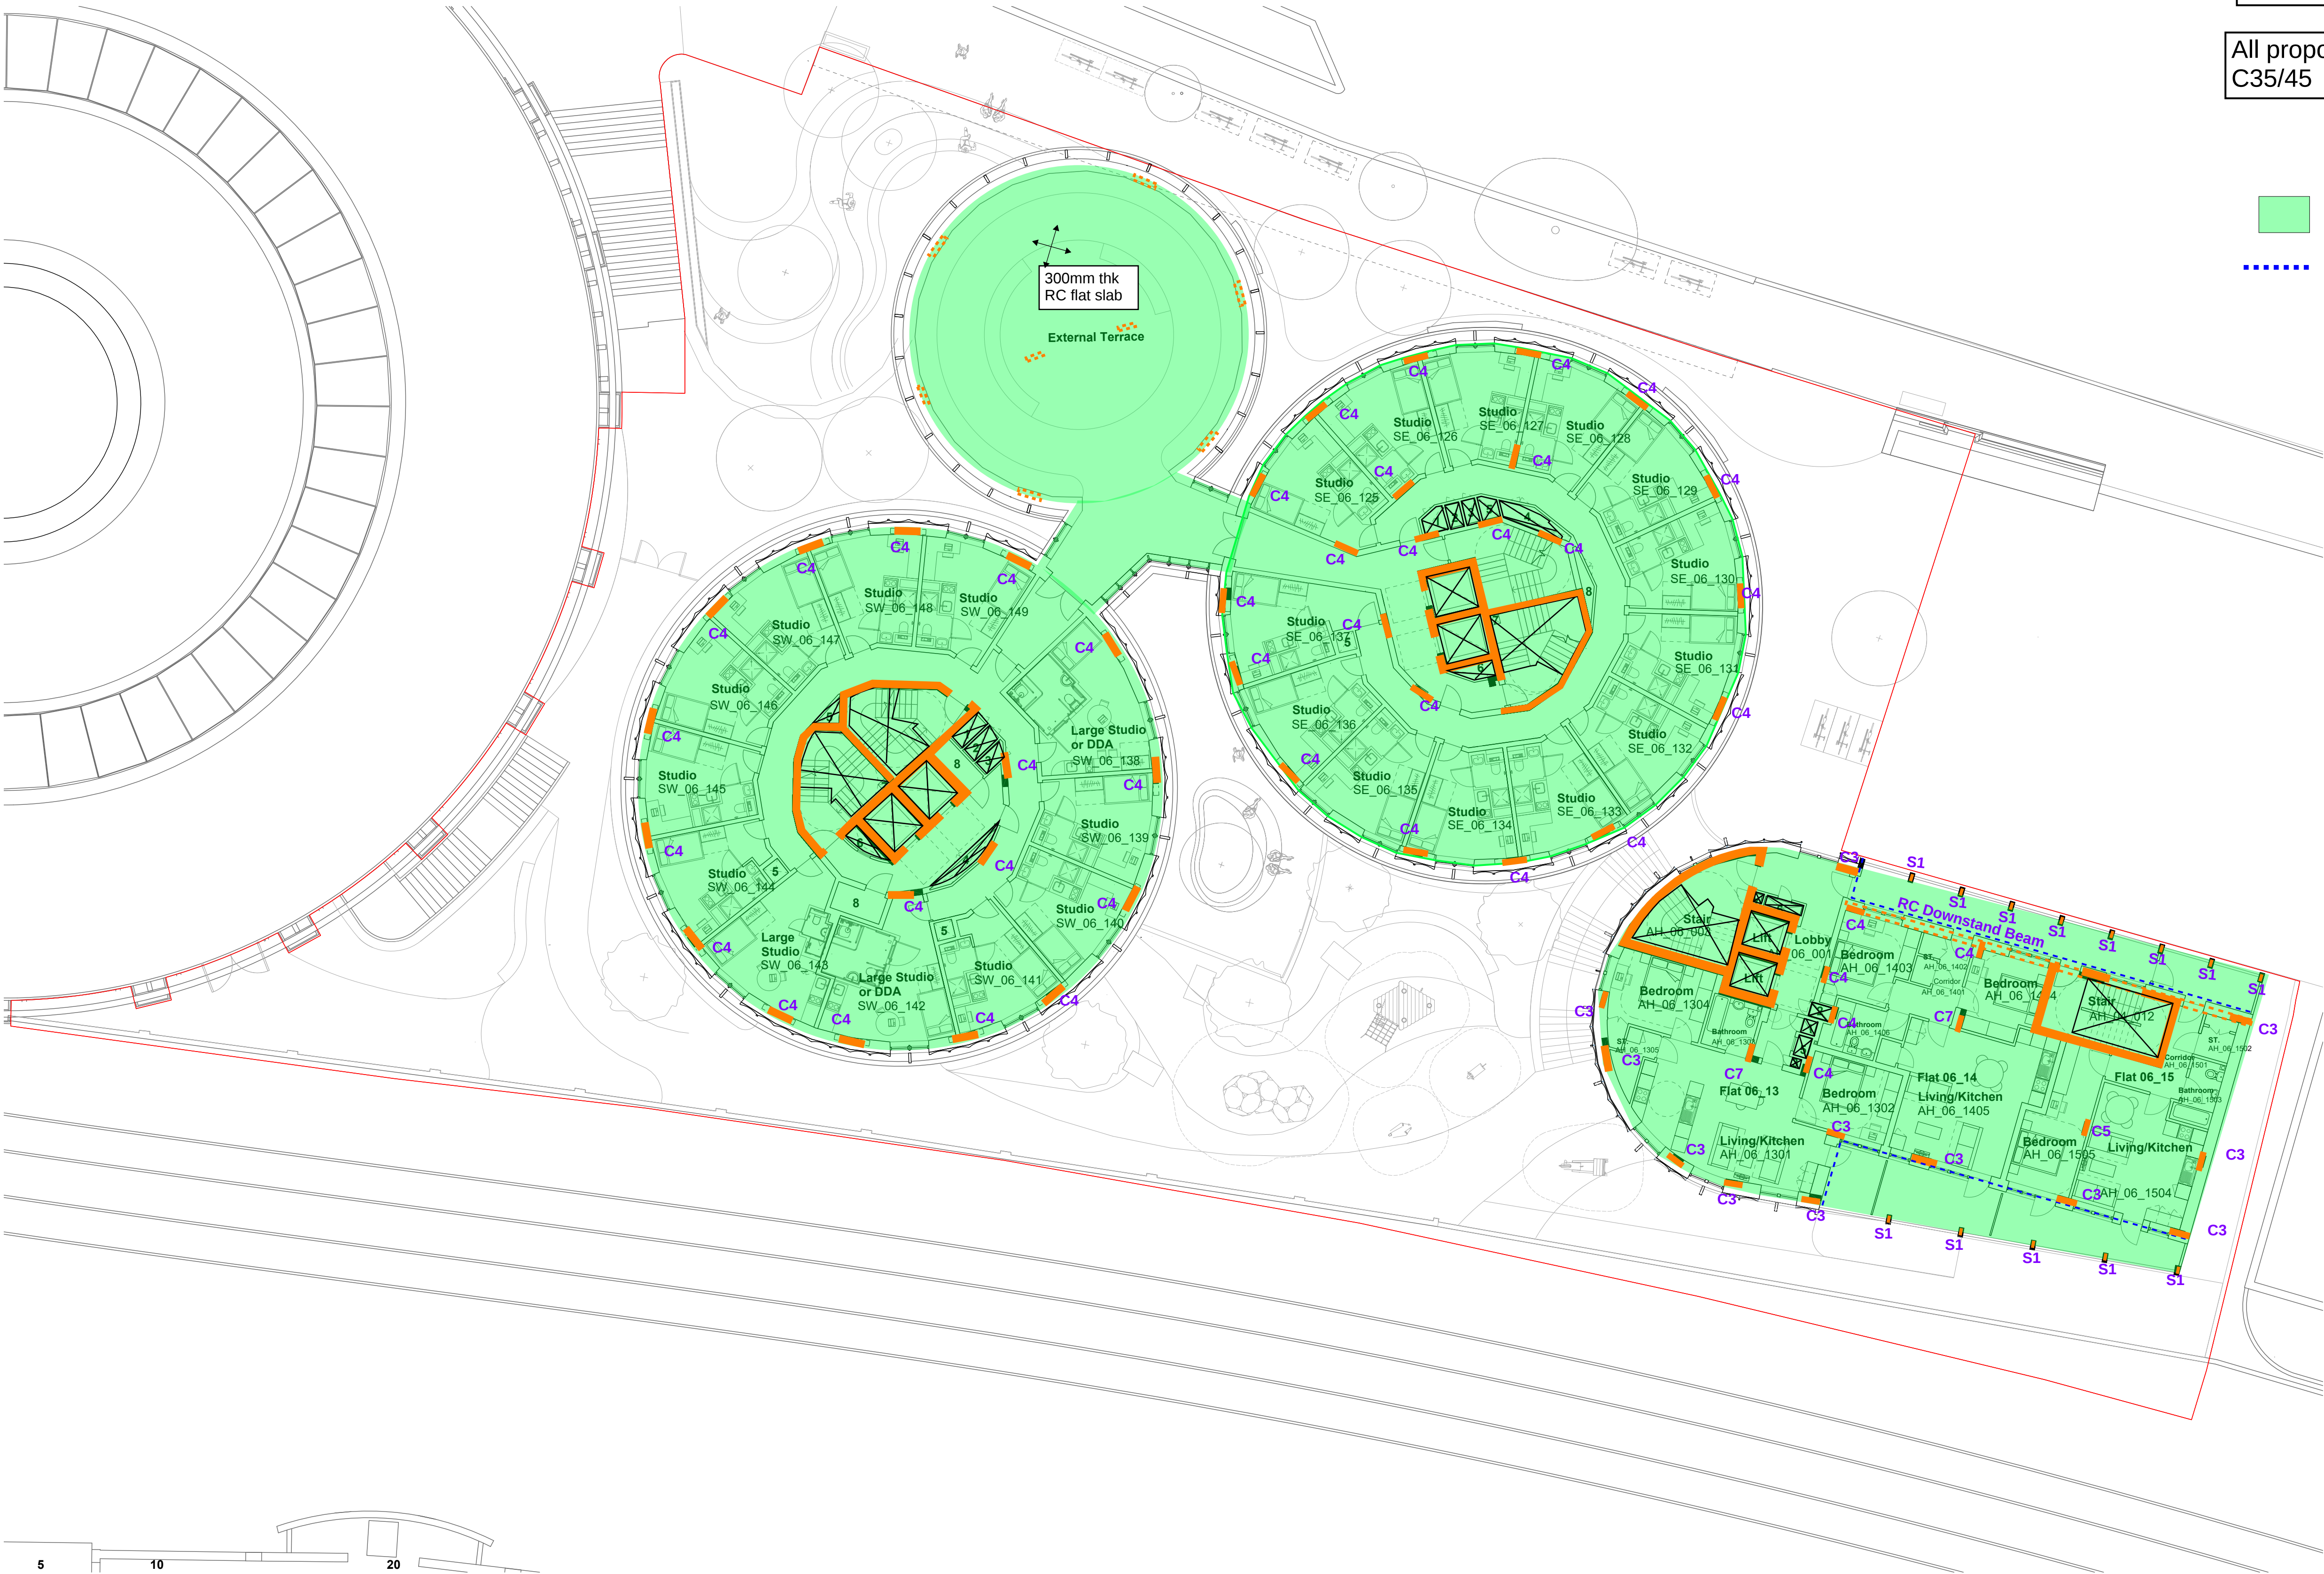

P01 RIBA Stage 2 ZZ / ZZ / ZZ 07.12.23

Rev	Description	Dm / Chk / App	Date
-----	-------------	----------------	------

Pell Frischmann

5th FLOOR, 85 STRAND LONDON WC2R 0DW
Telephone +44 (0)20 7486 3661
Email: pflondon@pellfrischmann.com
www.pellfrischmann.com

Architect/Client/Contractor

Regal Chalk
Farm Ltd

Project

100 Chalk Farm
Road

Sketch Title

Level 6 General
Arrangement

Sketch Status	S1 - For Information	Revision	P01
---------------	----------------------	----------	-----

Sketch No.
106885-PEF-ZZ-ZZ-SK-S-000805