


Beam Schedule		
Beam Reference	Beam Dimensions	Beam Material
S2	150x90x24PFC	Steel(S355)

Column Schedule		
Column Reference	Column Dimensions (mm x mm)	Column Material
C1	225x500	Concrete C35/45
C2	225x750	Concrete C35/45
C3	250x900	Concrete C35/45
C4	250x1000	Concrete C35/45
C5	250x1250	Concrete C35/45
C6	250x500	Concrete C35/45
C7	300x1300	Concrete C35/45
S1	203x203 UKC46	Steel (S355)

All proposed RC walls to be 225mm thick C35/45 concrete

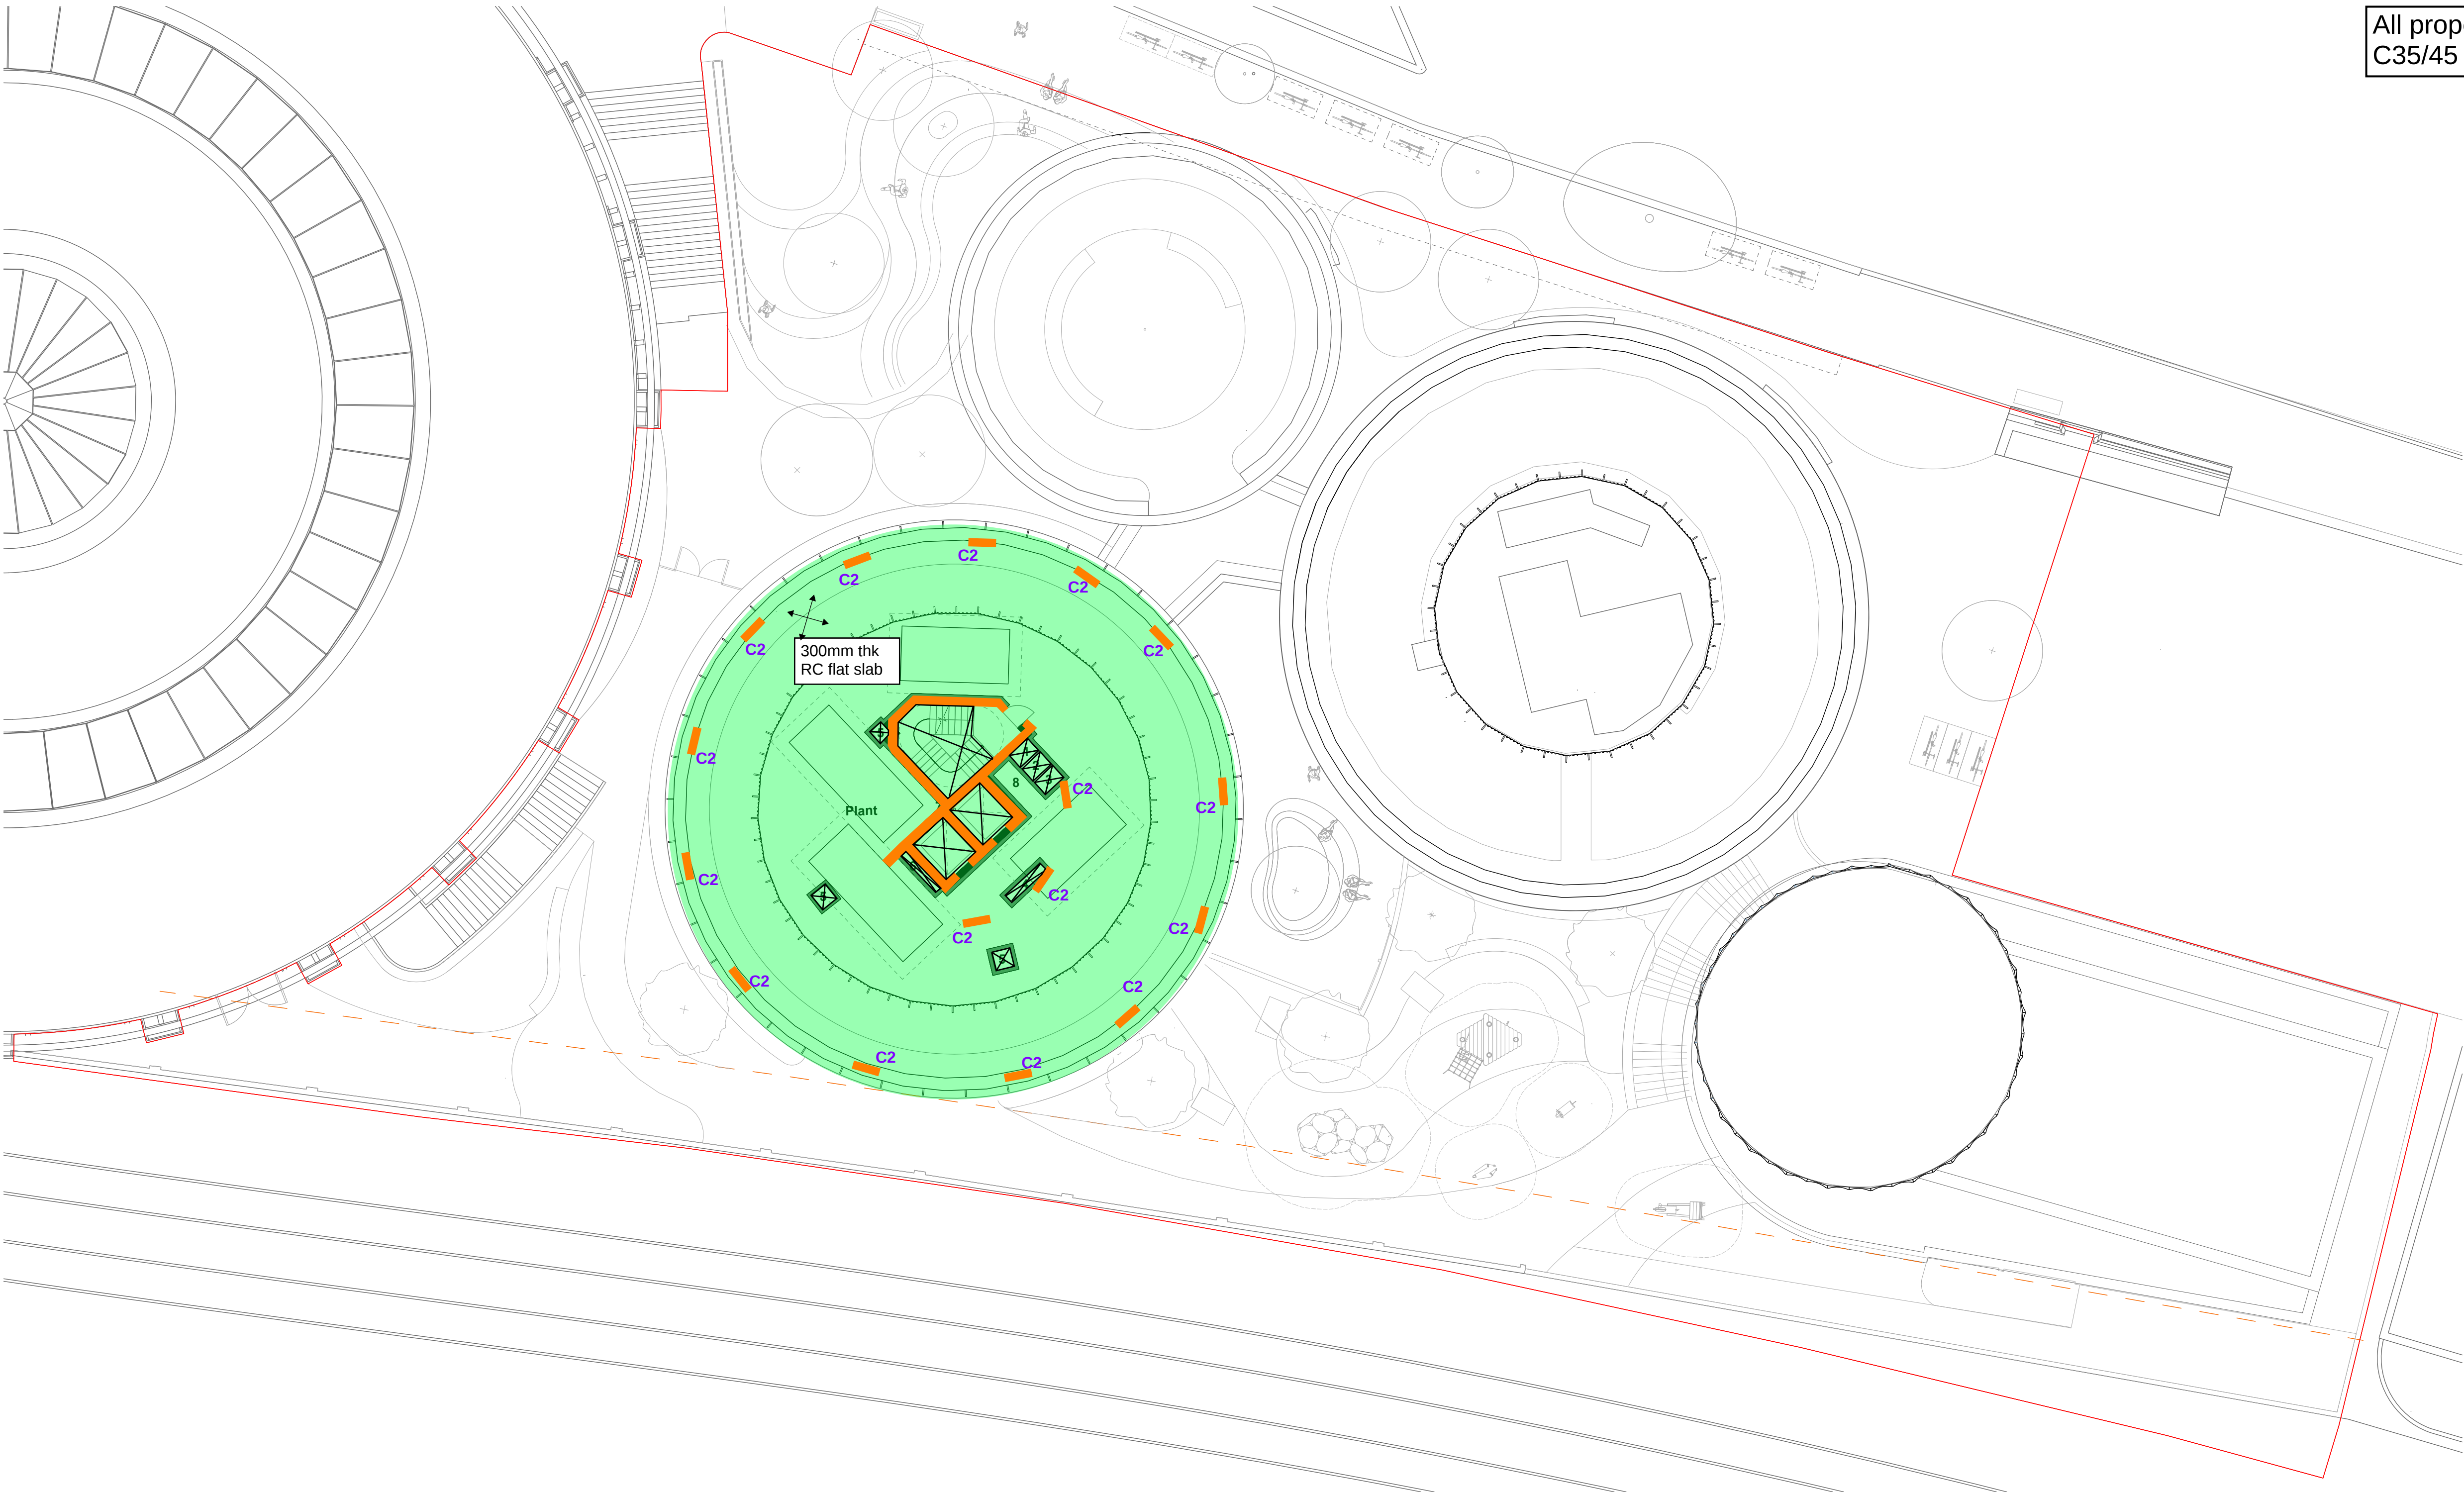

P01 RIBA Stage 2		ZZ / ZZ / ZZ		07.12.23
Rev	Description	Dm / Chk / App	Date	
Pell Frischmann 5th FLOOR, 85 STRAND LONDON WC2R 0DW Telephone +44 (0)20 7486 3661 Email: pflondon@pellfrischmann.com www.pellfrischmann.com				
Architect/Client/Contractor				
Regal Chalk Farm Ltd				
Project				
100 Chalk Farm Road				
Sketch Title				
Level 12 General Arrangement				
Sketch Status		Revision		P01
S1 - For Information				
Sketch No.				
106885-PF-ZZ-XX-SK-S-00808				