
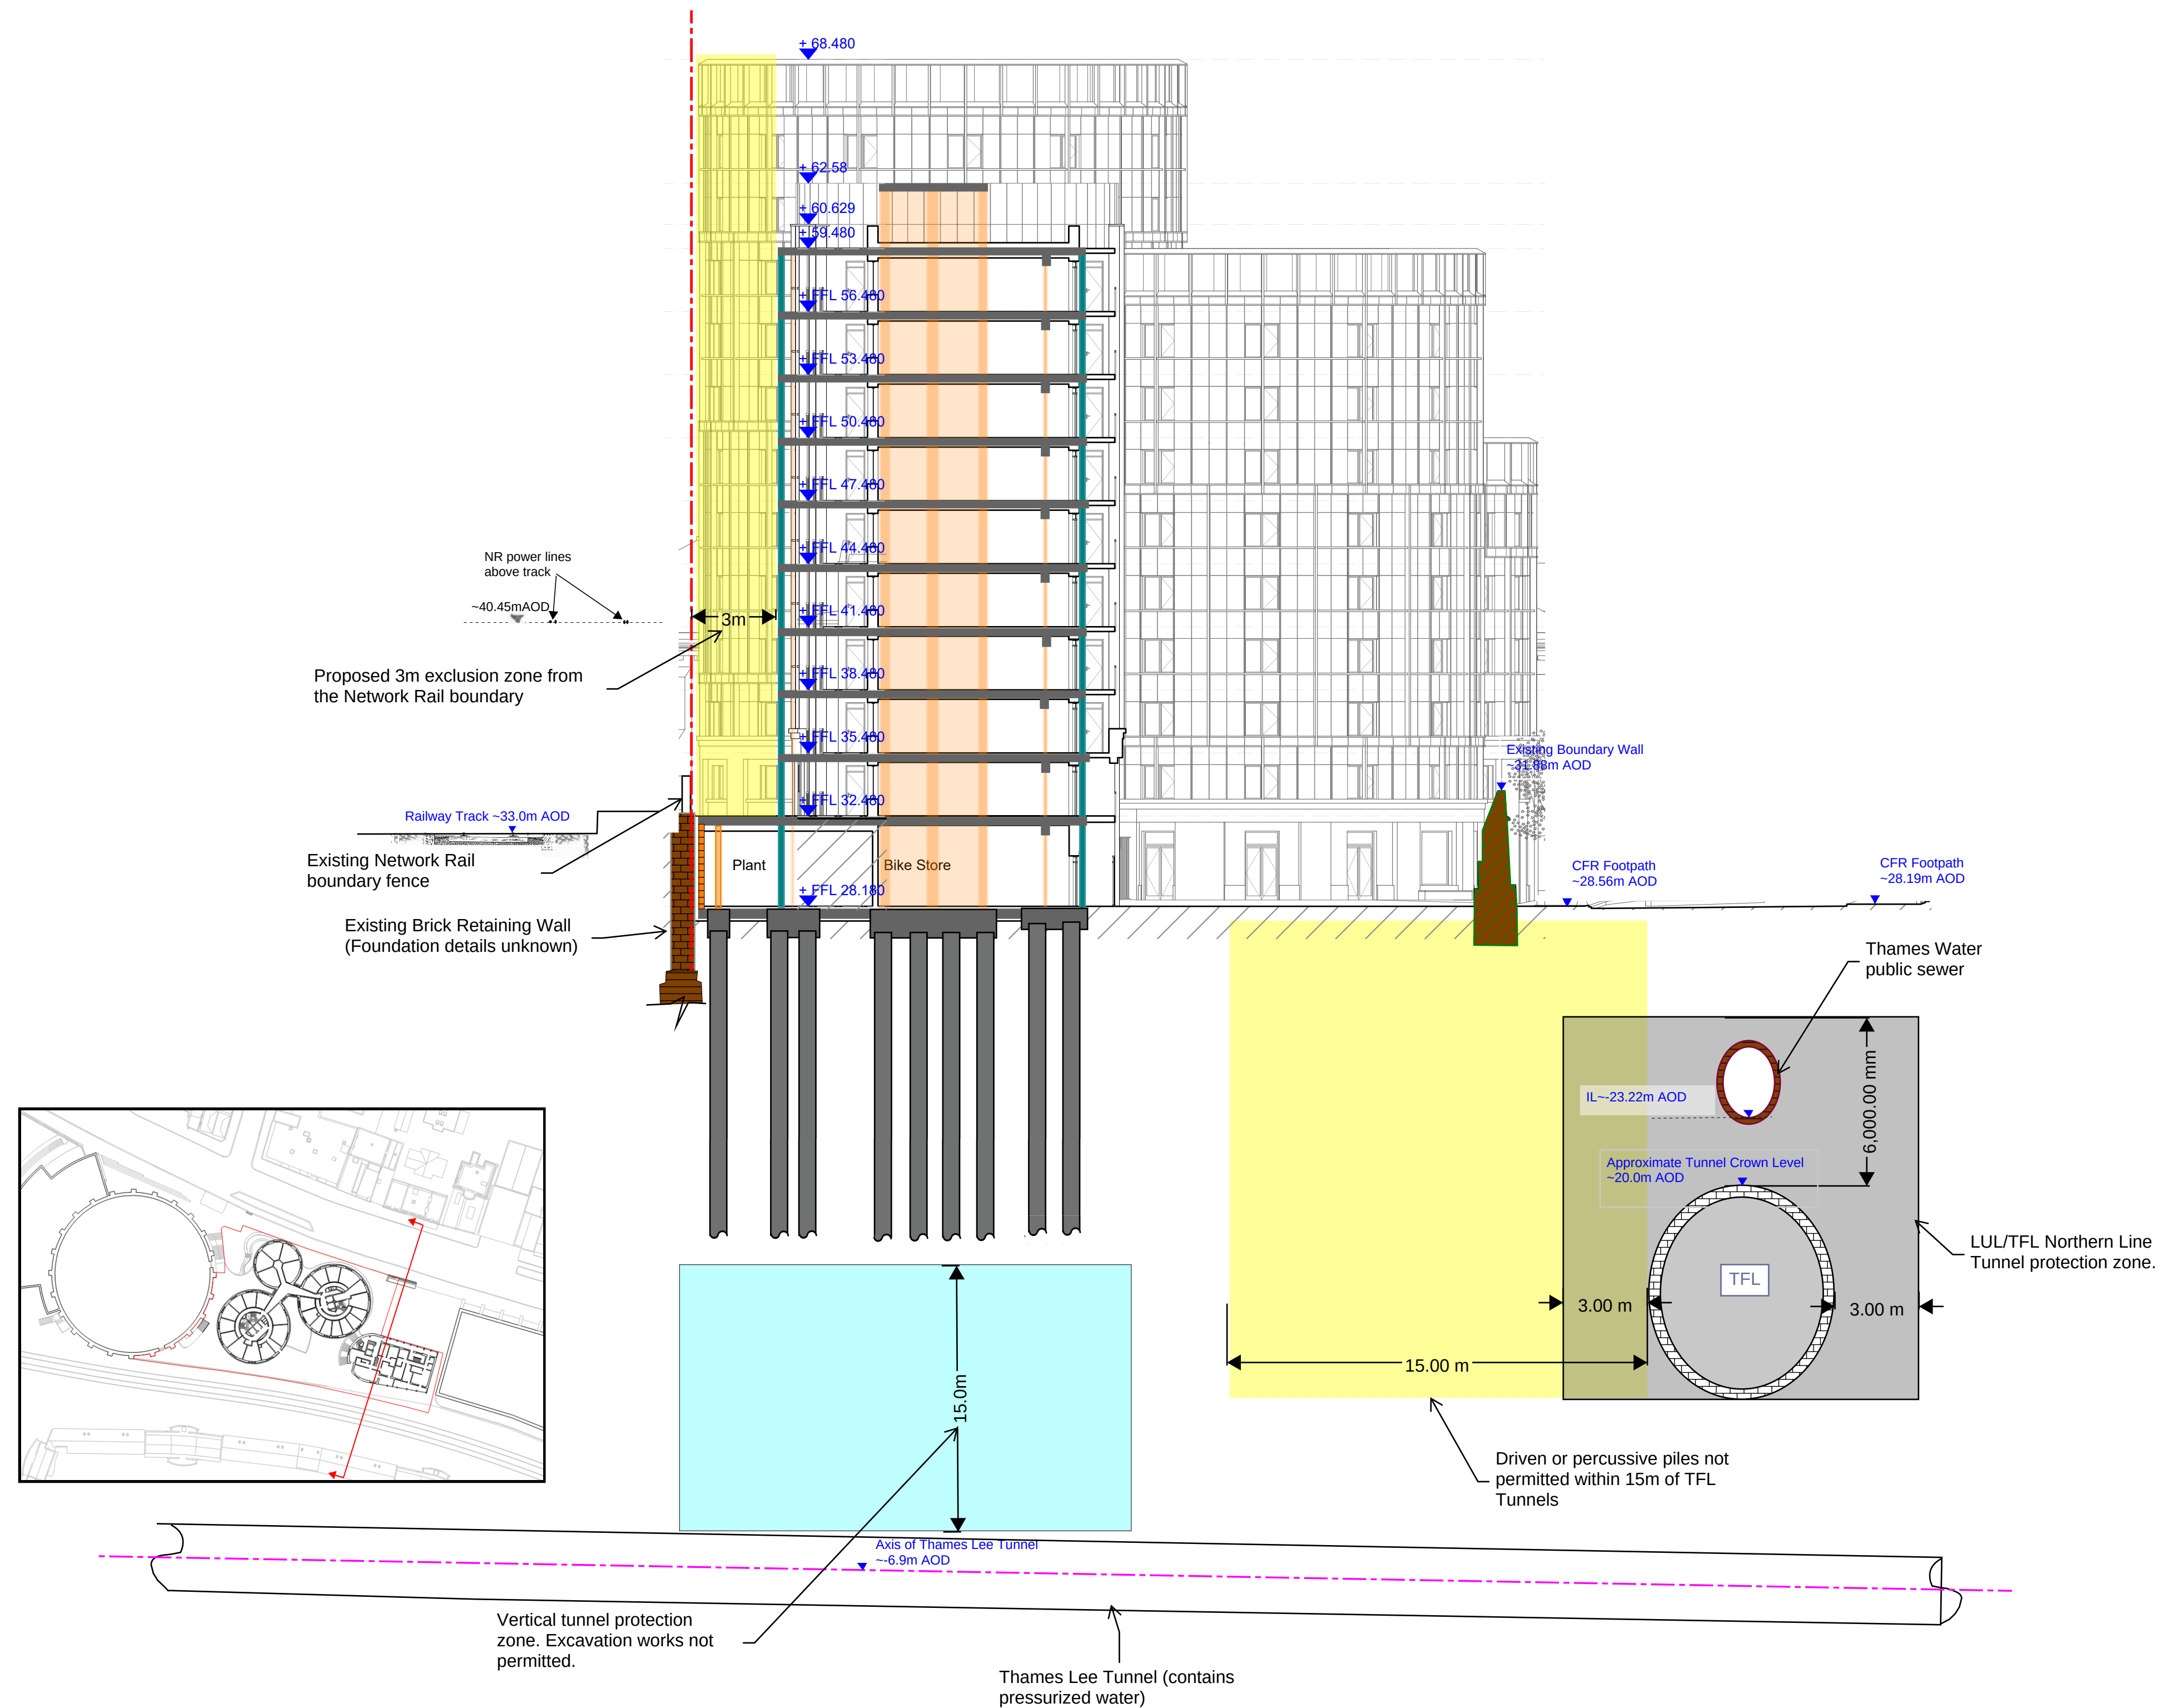


Beam Schedule		
Beam Reference	Beam Dimensions	Beam Material
S2	150x90x24PFC	Steel(S355)

Column Schedule		
Column Reference	Column Dimensions (mm x mm)	Column Material
C1	225x500	Concrete C35/45
C2	225x750	Concrete C35/45
C3	225x1000	Concrete C35/45
C4	250x1000	Concrete C35/45
C5	250x1250	Concrete C35/45
C6	250x500	Concrete C35/45
S1	203x203 UKC46	Steel (S355)

All proposed RC walls to be 225mm thick C35/45 concrete
--

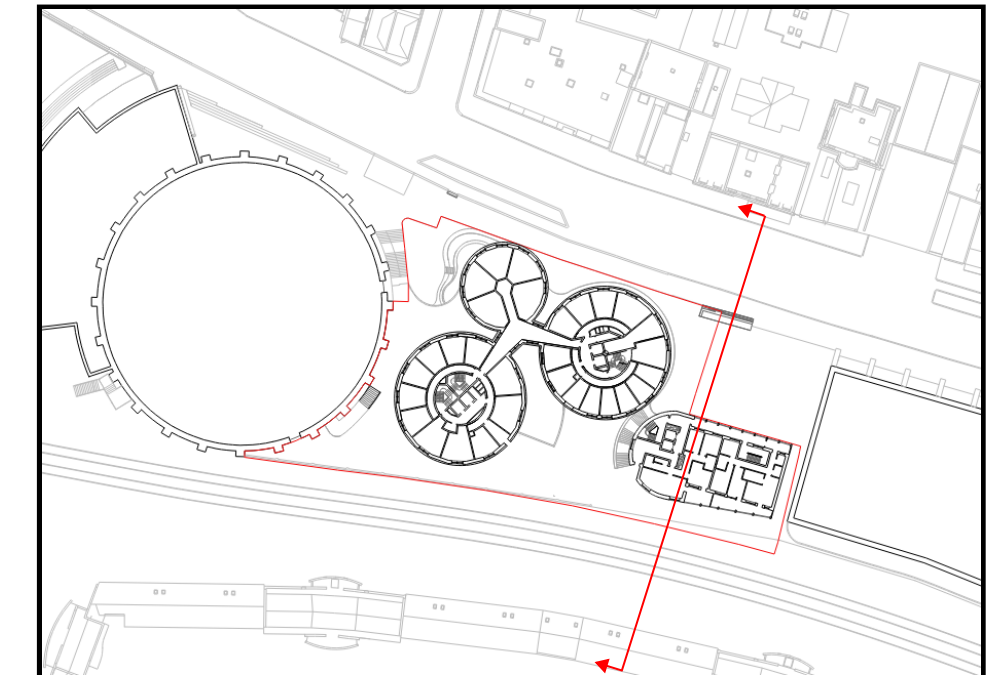

P01	RIBA Stage 2	ZZ / ZZ / ZZ	07.12.23
Rev	Description	Dm / Chk / App	Date
Pell Frischmann 5th FLOOR, 85 STRAND LONDON WC2R 0DW Telephone +44 (0)20 7486 3661 Email: pflondon@pellfrischmann.com www.pellfrischmann.com			
Architect/Client/Contractor Regal Chalk Farm Ltd			
Project 100 Chalk Farm Road			
Sketch Title Affordable Housing Section			
Sketch Status S1 - For Information			Revision P01
Sketch No. 106885-PEF-ZZ-ZZ-SK-S-000812			