

NOTES :

- General notes
- Timbalite 4/6/4 low E krypton filled double glazed units with choice of black, white spacer bars. Large choice of glass types available. Glazing units with timber putty line bead
  - Glazing units within 800mm of finished floor level to be toughened safety glass to BS.6206.1981.
  - All timber to be Accoya/Hardwood.
  - All windows to be fully weather stripped with schlegel aquamac soft compression seals.
  - Windows to be fitted with lead counter balance weights.
  - Ironmongery to include 4 x bearing type sash pulleys - 2 x sash lifts - 1 x fitch catch (2 no to wider windows); colour/finish - choice of satin chrome, polished chrome or polished brass.
  - Security - Provide 2 no security sash stop locks to each set of opening sashes.
  - Paint finish: white as standard - factory spray applied microporous paint. Choice of colour, dual colour, colour match or stain.

Date	Revisions

Client MR. & MRS. KUL B LUINTEL


Job Title  
114B CAMDEN STREET  
CAMDEN  
NW1 0HY

*SJR DESIGN LTD.*  
(ARCHITECTURAL DESIGN & CONSTRUCTION)


Drawing Title  
**WINDOWS DETAILS PROPOSED**

Scale: 1 : 5 / 20 ( A3 )  
Date: JULY 2024  
Checked by:      Drawn by: RS


Drg No. TP/669/06	Rev.
----------------------	------

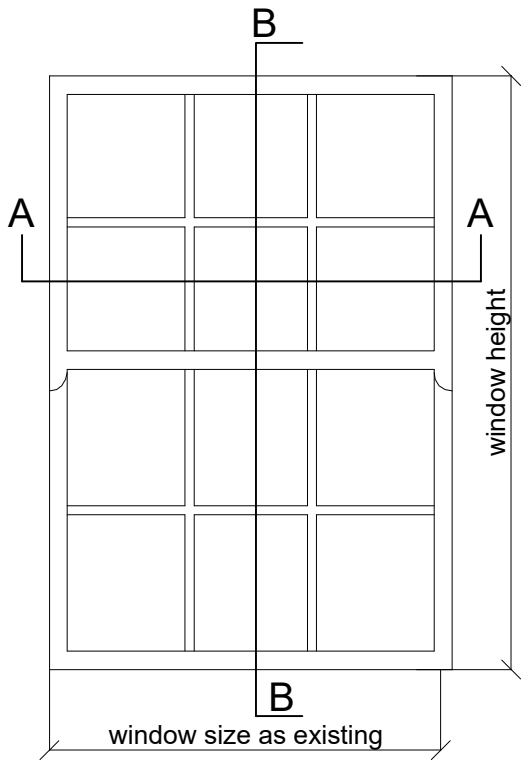

WINDOW W5 & W6

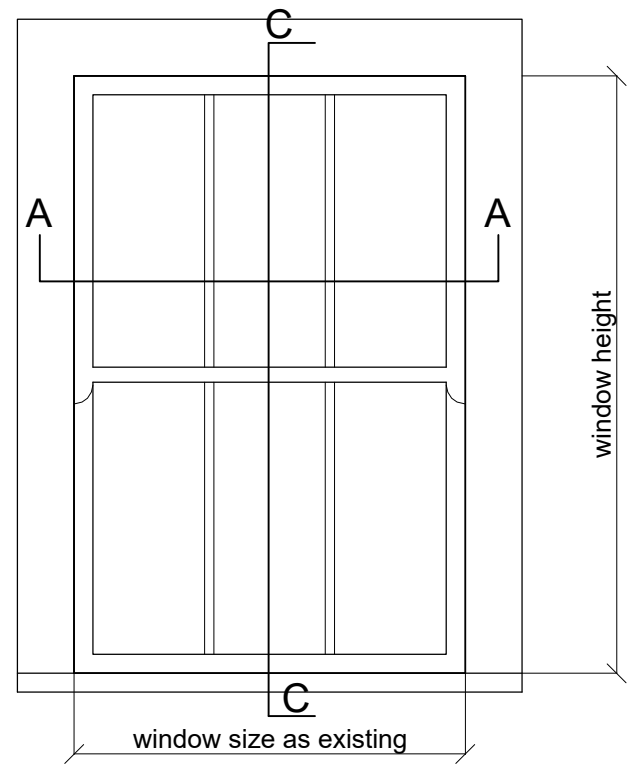

WINDOW W3 & W4

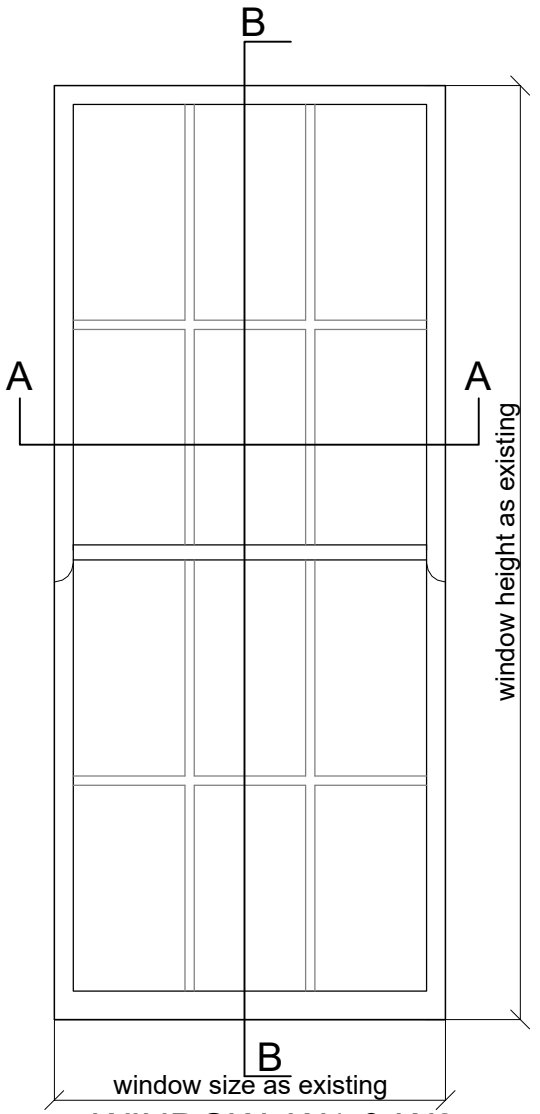

WINDOW W1 & W2

1 : 20 ( A3 )

existing single glazed sash windows and frames are proposed to be replaced with 'like for like' double glazed timber sash windows

