




brick

- NOT TO SCALE. DO NOT TAKE DIMENSIONS FROM THIS DRAWING
- 2. ALL WINDOWS TO BE REPLACED WITH NEW TIMBER WINDOWS AS PROVIDED AND INSTALLED BY ANGLIAN HOME IMPROVEMENTS OR EQUAL APPROVED
- 3. ALL NEW FRAMES SECTIONS TO MATCH EXISTING IN DIMENSION
- 4. ALL WINDOWS TO BE REPLACED IN A LIKE FOR LIKE BASIS EXCEPT FOR WF.06
- 5. GLASS PROFILE FOR NEW WINDOWS AT DOORS TO BE 6.4 MM LAMINATED GLASS 14 MM ARGON GAS CAVITY 6.4 MM LAMINATED GLASS
- 6. TRICKLE VENTS REQUIRED TO COMPLY WITH PART F OF THE BUILDING REGULATIONS
- 7. NEW GARAGE DOOR TO BE OF THE ROLLER TYPE TO MAXIMIZE CLEAR HEIGHT
- 8. ALL FINISH COLOURS TO MATCH EXISTING



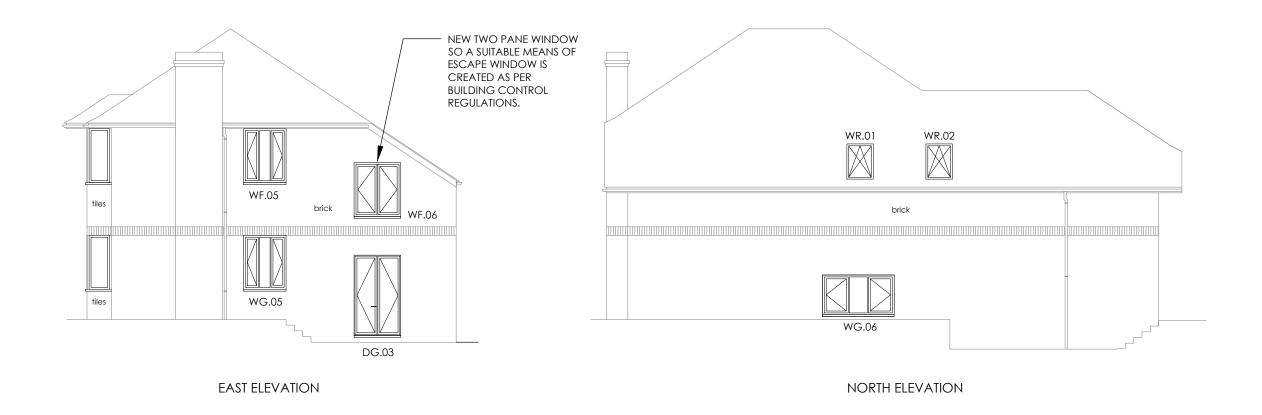

2a WEDDERBURN ROAD WINDOW REPLACEMENT Dwg2 / Elevations as proposed / by LABS / March 2024