


# IKON

## IKCL33 Continuous Louvre

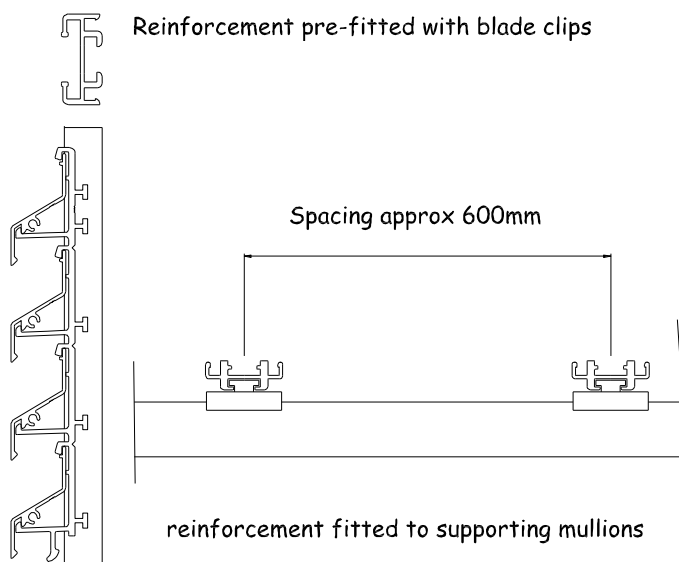

### Product description

Continuous louvers providing both functional and aesthetical integration with building facades

Reinforcement bars are supplied assembled with glazing clips. These are not seen when fitted with the louvre blades

Blade Centre 34mm . Blade angle 60 degree.

Visual free area 59%. Physical free area 43.5%.

Louvre element tested to EN 13030:2001

BSRIA Test report 104080/2

### Options

Standard RAL or BS colours. Anodizing to special order.

Insect mesh

Bird mesh


Single skin, or double skin insulated blanking panels

K Factor  
23.56

Ce 0.206

Watertightness	%	Class	Pressure Drop	Pd
Velocity 0.0	99.5	A	Face Velocity 0.5	6.70
0.5	98.6	B	1.0	20.0
1.0	95.8	B	1.5	39.7
1.5	78.3	D	2.0	65.9
2.0	44.0	D	2.5	98.7
2.5	24.4	D	3.0	137.9

Performance: airflow, louvre with insect mesh

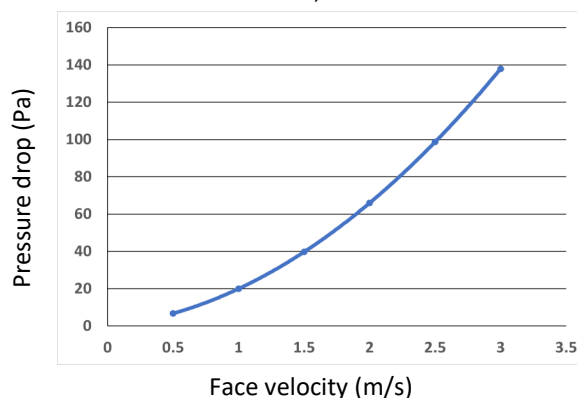

Unit 1-3 Yardley Brook Industrial Park, Leaford Way, Shard End, Birmingham, B33 9TX

Tel: 0121 789 9936, Fax 0121 783 7905, Web : [www.ikonaluminium.co.uk](http://www.ikonaluminium.co.uk), Sales : [info@ikonaluminium.co.uk](mailto:info@ikonaluminium.co.uk)