


Med0 GS EdgeGuard

Product Data Sheet

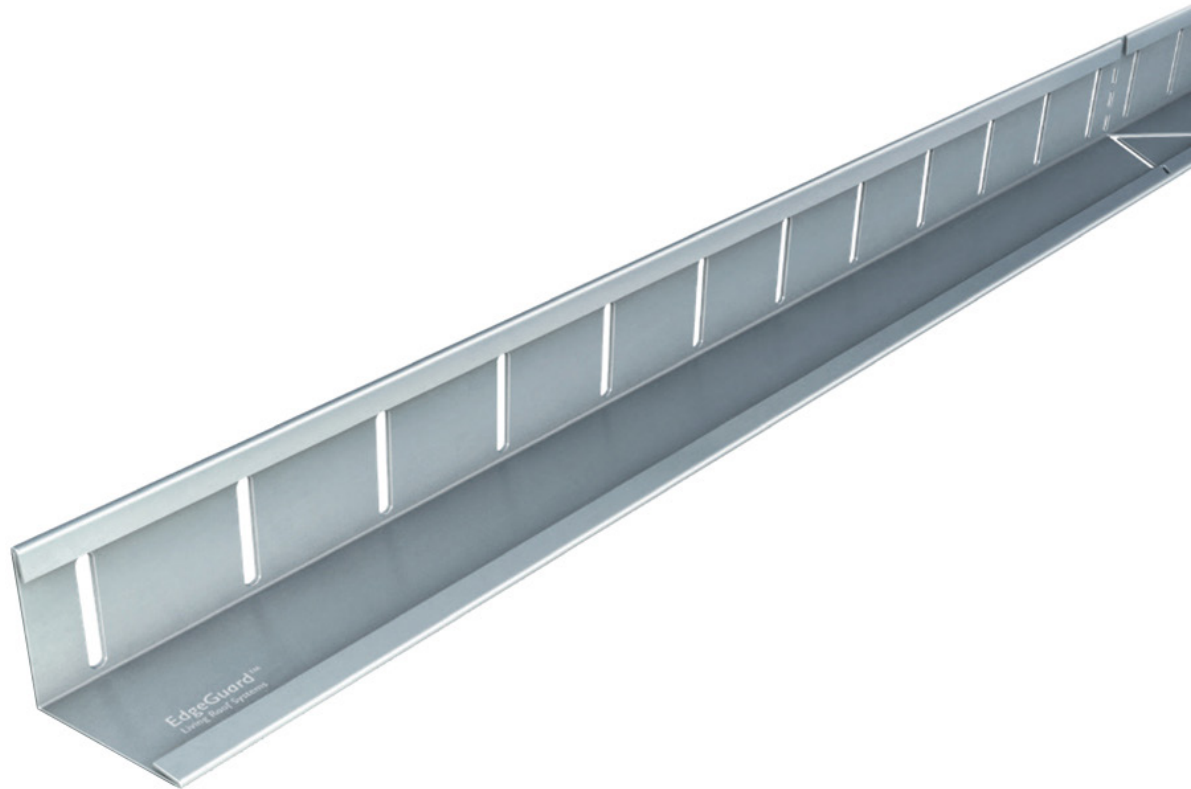

Med0 GS Edge Guard provides a fast and simple to install edge restraint system for gravel ballast retention on green roofs.

MedO

GS EdgeGuard

General Information

MedO GS EdgeGuard provides a fast and simple to install edge restraint system for gravel ballast retention on green roofs. They can also be used to create a hard break between gravel ballast and green roof growing mediums, maintaining gravel fire breaks and helping reduce vegetation transfer into the gravel margin. The slotted vertical face allows for water drainage whilst wide base leg provides restraint without requiring penetration of the waterproofing.

Manufactured from aluminium each 2.4m length of MedO GS EdgeGuard is designed so that the folded end of the length can received the 'tongue' of another length of MedO GS EdgeGuard, eliminating the need for jointing pieces when used as a complete length.

Each length also features a pre-relieved mitre section at the mid length point, enable quick and simple formation of corners and angles without the need for pre-made sections.

MedO GS EdgeGuard is supplied self-finished as standard but can be supplied powder coated in any colour, contact Radmat Building Products for lead time.

Curved lengths are also available. These require a separate jointing piece for each length.

Directions of applications

Loose lay over a suitable Radmat waterproofing membrane, ProTherm inverted roof insulation WFRL or MedO drainage/retention board. Connect each length by slotting the tongue into the folded end of the next piece. Where MedO GS Edge Guard needs to be cut to length ensure the correct end is cut to enable location in to the lengths on either side. Jointing pieces are available should they be required.

Med0

GS EdgeGuard

PRODUCT DESCRIPTION

Appearance

Self-finished Aluminium, pre-punched and profiled

PRODUCT RANGE

Straight Lengths	Height (mm)	Base width (mm)	Thickness (mm)	Length
GS-50	50	100	1.2	2400
GS-75	75	100	1.2	2400
GS-100	100	100	1.2	2400
GS-120	120	100	1.2	2400
GS-150	150	150	1.2	2400
GS-200	200	150	1.5	2400
GS-250	250	200	1.5	2400
GS-300	300	200	1.5	2400

Curved Lengths	Height (mm)	Base width (mm)	Thickness (mm)	Length
GS-C50	50	100	1.2	2400
GS-C75	75	100	1.2	2400
GS-C100	100	100	1.2	2400
GS-C120	120	100	1.2	2400
GS-C150	150	150	1.2	2400
GS-C200	200	150	1.5	2400
GS-C250	250	200	1.5	2400
GS-C300	300	200	1.5	2400

Connector pieces	Height (mm)	Base width (mm)	Thickness (mm)	Length
GS-CP45	45	95	1.2	250
GS-CP70	70	95	1.2	250
GS-CP95	95	95	1.2	250
GS-CP115	115	95	1.2	250
GS-CP145	145	145	1.2	250
GS-CP195	195	145	1.5	250
GS-CP245	245	195	1.5	250
GS-CP295	295	195	1.5	250

This information given in good faith and is based on the latest knowledge available to Radmat Building products Ltd. Whilst every effort has been made to ensure that the contents of the publication are current while going to press, customers are advised that products, techniques and codes of practice are under constant review and liable to change without notice.

For further information on Radmat products and services please call **01858 410372**, email techenquiries@radmat.com or visit our website www.radmat.com **JAN 2021**