
	KEF: TA1550-CTH-CC 001											
	-		Laser - Adjustable round recessed luminaire	Company:	iGuzzini	Lamp Type:	LED	Notes:		Diameter:	83 mm	
		Name:						_	manufacturer for			
		Description:	Adjustable round recessed flood luminaire inc		P365.01	Manufacturers:	iGuzzini		installation details.	Width:		.4c. T
			driver - Framed	Code:	NAVA1 004 O Harramanah lamma	14/0440000	C 0 W		02. Drivers to be located in a	I I a la la la la la	00	MANA
				Accessories:	MY11.004.0 Honeycomb louvre	Wattage:	6.8 W		well-ventilated and accessible area for	Height:	90 mm	8
	Milita			Finish:	01 White	No. of lamps:	1		maintenance.	Cut out:	75 mm	
D1b				FIIIISII.	or writte	Base:	СОВ		03. Manufacturer to confirm	cut out.	73 111111	F
				Control Gear	MY08.000.0 DALI-2	Voltage:	СОВ			Suspension:		ø 83
		Location:		control ocur	Constant current DALI PSU	Beam Angle:	39°		chact qty of affects req a.	Juspensioni		
		Location			200mA	CCT:	2700K			Weight:	0.3 kg	
		Contact:		Total Load:	6.8 W	CRI:	90					ø 75
		Email:		IP Rating:	IP20	TM66:				Lumen/Wat	t 89.4	
		Number:		LOR:	80	Lumen Output:	1015 lm					
		Luminaire	Laser - Adjustable round recessed luminaire	Company:	iGuzzini	Lamp Type:	LED	Notes:		Diameter:	68 mm	
		Name:	Adioatable assessed assessed 8	- Dunch of	0.455.04	Manufact	:C::	_	manufacturer for	14/5 alg 1-	C0 ****	m-m -
		Description:	Adjustable round recessed flood luminaire inc		QA65.01	Manufacturers:	ıGuzzini		installation details.	Width:	68 mm	
			driver - Plaster In	Code: Accessories:	SM3.PA23.001.0 Min. round	Wattago:	6.8 W		<ol> <li>Drivers to be located in a well-ventilated and</li> </ol>	Hoight.	84 mm	4   4
				Accessories:	flange	Wattage:	U.O W		accessible area for	Height:	04 111111	Ø N
	444				MY11.004.0 Honeycomb louvre				maintenance.			
D1p	MANA			Finish:	01 White	No. of lamps:	1		03. Manufacturer to confirm	Cut out:		
	E					Base:	СОВ		exact qty of drivers req'd.			
				Control Gear	MY08.000.0 DALI-2	Voltage:				Suspension:		
		Location:			Constant current DALI PSU	Beam Angle:	39°					
					200mA	CCT:	2700K			Weight:	0.3 kg	
		Contact:		Total Load:	6.8 W	CRI:	90					Ø68
		Email:		IP Rating:	IP20	TM66:	1015			Lumen/Wat	t 89.4	
		Number:		LOR:	80	Lumen Output:	T012 ILU					
			Laser - Adjustable round recessed luminaire	Company:	iGuzzini	Lamp Type:	LED	Notes:		Diameter:	83 mm	
		Name:	Adjustable round recessed spot luminaire inc	Product	P363.01	Manufacturers:	iGuzzini	_	manufacturer for installation details.	Width:		
		Description.	driver - Framed	Code:	. 505.01	.vianalacture(5.	Juzziiii		02. Drivers to be located in a			Merca. T
					MY11.004.0Honeycomb louvre	Wattage:	6.8 W		well-ventilated and	Height:	90 mm	
	-1 Pm-					3	-		accessible area for	- 0		
72h				Finish:	01 White	No. of lamps:	1		maintenance.	Cut out:	75 mm	
D2b						Base:	COB		03. Manufacturer to confirm			₩ 83
				Control Gear	MY08.000.0 DALI-2	Voltage:			exact qty of drivers req'd.	Suspension:		
		Location:			Constant current DALI PSU	Beam Angle:	14°					$\langle \Lambda \rangle$
					200mA	CCT:	2700K			Weight:	0.3 kg	ø 75
		Contact:		Total Load:	6.8 W	CRI:	90				. 04.6	
		Email:		IP Rating:	IP20	TM66:	101E l			Lumen/Wat	81.6	
		Number:		LOR:	71	Lumen Output:	T012 ILU					
			Eyeconic Mini Trim Adjustable	Company:	Phos	Lamp Type:	LED	Notes:		Diameter:	62 mm	
		Name:	Recessed directional down light - Frame - 30	Product	EY-MTA-WT/B1/WT/WT-STD14-	Manufacturore	Phos		manufacturer for installation details.	Width:		1
		pescription:	degree beam	Code:	27-90-30-1050	ivialiuidetui ers:	1 1103		02. Drivers to be located in a	wiutii.		0-28*
						Wattage:	14.0 W		well-ventilated and	Height:	101 mm	
					-1				accessible area for	- 0		
D3				Finish:	White	No. of lamps:	1		maintenance.	Cut out:	56 mm	
D3						Base:			03. Manufacturer to confirm			January Januar
				Control Gear	DALI-2	Voltage:	(Vf) 36V		exact qty of drivers req'd.	Suspension:		
		Location:			Remote Driver	Beam Angle:	30°					ATOT-
						CCT:	2700K			Weight:		+
		Contact:		Total Load:	14.0 W	CRI:	90					
		Email:		IP Rating:	IP 65 From front	TM66:	670			Lumen/Wat	62	
		Number:		LOR:		Lumen Output:	0/9 IM					

PROJECT TITLE: Camden Town Hall - Camden Centre

PROJECT REF: TA1550-CTH-CC 001 -


			Eyeconic Mini Trim Adjustable	Company:	Phos	Lamp Type:	LED	Notes:		Diameter:	62 mm	
		Name: Description:	Recessed directional down light - Frame - 10	Product	EY-MTA-WT/B1/WT/WT-STD14-	Manufacturers:	Phos		manufacturer for installation details.	length		
			degree beam	Code:	27-90-10-1050				02. Drivers to be located in a			0-28*
				Accessories:	Honeycomb Flush	Wattage:	14.0 W			Height:	101 mm	Minn
D.4	. 1144			Finish:	White	No. of lamps:	1		accessible area for maintenance.	Cut out:	56 mm	ED: 101
D4						Base:			03. Manufacturer to confirm			Minos di maranta di ma
				Control Gear:	DALI-2	Voltage:			exact qty of drivers req'd.	Suspension:		- in and an
		Location:			Remote Drives	_	10°		.,			TOTAL
						_	2700K			Weight:		(*)
		Contact:		Total Load:	14.0 W	CRI:	90					
		Email:		IP Rating:	IP65 From front	TM66:				Lumen/Wat	t 69	ī,
		Number:		LOR:		Lumen Output:						
		Luminaire	Laser - Adjustable round framed recessed	Company:	iGuzzini	Lamp Type:	LED	Notes:	01. Contractor to refer to	Length:		
		Name:	luminaire					_	manufacturer for			
		Description:	Laser - Adjustable round recessed luminaire -	Product	P363.01	Manufacturers:	iGuzzini	_	installation details.	Diameter:	83.0 mm	
			Framed - Custom Spring clup Required for	Code:					02. Drivers to be located in a			
		_	75mm ceiling thickness	Accessories:	MY11 - Honeycomb / MY08 DALI	Wattage:	7.0 W		well-ventilated and	Height:	90.0 mm	dia T
					Driver				accessible area for			
				Finish:	01 Whte	No. of lamps:	1		maintenance.	Cut out:	75 mm	8
						Base:			03. Manufacturer to confirm			
D12	Aldin L.			Control Gear:	DALI	Voltage:			exact qty of drivers req'd.	Suspension:		
	All I	Location:				Beam Angle:	14°					ø 83
						CCT:	2700 K			Weight:	0.2 kg	
		Contact:		Total Load:	7.0 W	CRI:	90					$\mathcal{O}(\mathcal{O})$
												ø 75
		Email:		IP Rating:	IP20	TM66:				Lumen/Wat	t 79	
		Number:		LOR:		Lumen Output:	1609 lm					

		Luminaire Surface mount spot Name:	Company:	PHOS	Lamp Type:	LED	Notes:	01. Contractor to refer to manufacturer for	Diameter:	40 mm	
		Description: Surface mount spot	Product Code:	OC-R-SM-WTWT-STD9-27-90-50-700	Manufacturers:	PHOS			Width:		CABLE EXIT: Ø20
				Honeycomb	Wattage:	9.0 W		well-ventilated and accessible area for	Height:	110 mm	
13			Finish:	White		1		maintenance.	Cut out:		
			Control Gear:	DALI	Base: Voltage:	COB		03. Manufacturer to confirm exact qty of drivers req'd.	Suspension:		100
		Location: Stair Cores			Beam Angle:	50°			147-1-1-1		
		Contact:	Total Load:	9.0 W	CCT: CRI:	2700K 90			Weight:		
		Email:		IP20	TM66:				Lumen/Wat	t 49	<del>-</del> Ø40 <del>-</del>
		Number:	LOR:		Lumen Output:	510 lm					
		Luminaire Tassel	Company:	Apparatus	Lamp Type:	LED	Notes:		Diameter:	63 mm	
		Name: Description: Feature Wall Light	Product	Tassel	Manufacturers:	TRC		manufacturer for installation details.	length	10 mm	
		Description. Teatare wan light	Code:	103361	ividiididetai Ci 3.	TDC		02. Drivers to be located in a	_	10 111111	5.5 IN 7 M CM
			Accessories:		Wattage:	8.0 W		well-ventilated and accessible area for	Height:	600 mm	(A)
			Finish:		No. of lamps:	1			Cut out:		8 0
					Base:			03. Manufacturer to confirm			N 122
		Landing Wellholm Lands and	Control Gear:		Voltage:			exact qty of drivers req'd.	Suspension:		
		Location: Vestibules / main space			Beam Angle: CCT:	2700K			Weight:		
		Contact:	Total Load:	8.0 W	CRI:	270010			WCIBIT.		2.5 IN / 6.3 CM 4 IN / 10 CM
	-	Email:	IP Rating:		TM66:				Lumen/Wat	t	
		Number:	LOR:		Lumen Output:						
		Luminaire Press - Mini Wall light Name:	Company:	Tom Dixon	Lamp Type:	LED	Notes:	01. Contractor to refer to manufacturer for	Diameter:	215 mm	
		Description: Press - Mini Wall light	Product Code:	Press mini	Manufacturers:	TBC		installation details.  02. Drivers to be located in a	length		
			Accessories:		Wattage:	6.0 W		well-ventilated and accessible area for	Height:	80 mm	<u>io</u>
		wcs	Finish:		No. of lamps:	1		maintenance.	Cut out:		((()))
					Base:			03. Manufacturer to confirm			21.5
		Location:	Control Gear:		Voltage: Beam Angle:			exact qty of drivers req'd.	Suspension:		21 5 /0 5 // 0 /7
		Location.			CCT:	2700 K			Weight:		21.5/8.5" 8/3
		Contact:	Total Load:	6.0 W	CRI:						
		Email:	IP Rating:	IP45	TM66:				Lumen/Wat	t	
		Number:	LOR:		Lumen Output:						
		Luminaire Press - Wall light Name:	Company:	Tom Dixon	Lamp Type:	LED	Notes:	01. Contractor to refer to manufacturer for	Diameter:	350 mm	
		Description: Press - Wall light	Product Code:	Press	Manufacturers:	TBC		installation details. 02. Drivers to be located in a	length		
			Accessories:		Wattage:	6.0 W		well-ventilated and accessible area for	Height:	90 mm	
			Finish:		No. of lamps:	1			Cut out:		
					Base:			03. Manufacturer to confirm			
		Locations	Control Gear:		Voltage:			exact qty of drivers req'd.	Suspension:		
		Location:			Beam Angle: CCT:	2700K			Weight:		
		Contact:	Total Load:	6.0 W	CRI:	_, , , , ,					
		Email:	IP Rating:		TM66:				Lumen/Wat	t	
		Ellidii.	ir Natilig.		1111001					-	

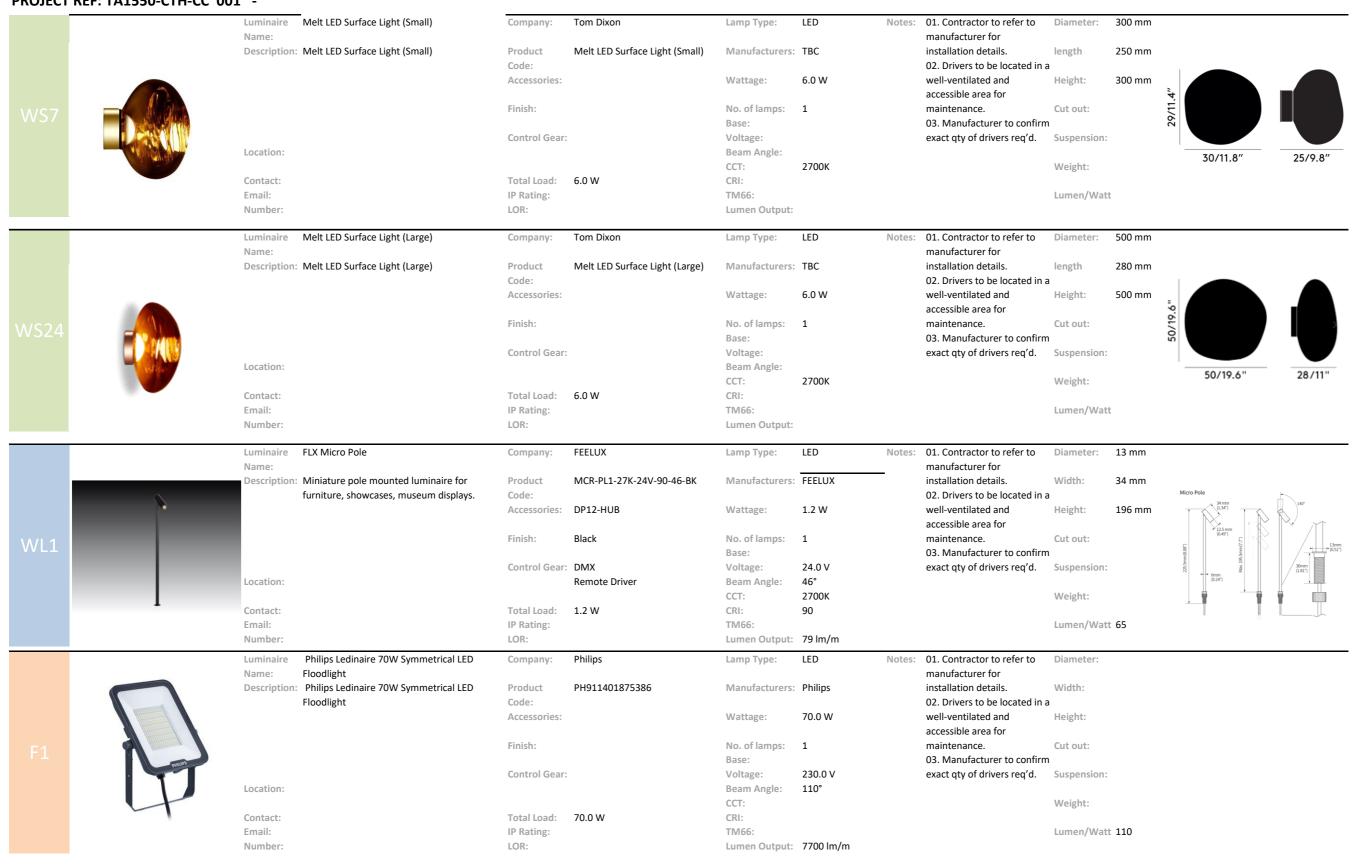


	T.	Plane drop - Chandilier	Company:	Tom Dixon	Lamp Type:		Notes:		Length:		. I
	Name:	: Plane drop - Chandilier	Product		Manufacturers	Tom Divon	_	manufacturer for installation details.	Diameter:	450 mm	•
	Description	. Flatte drop - Chandillei	Code:		ivialiulactuleis	TOTTI DIXOTI		02. Drivers to be located in a	Diameter.	430 111111	
	•		Accessories:		Wattage:	375.0 W		well-ventilated and	Height:	1540 mm	
	<b>-</b>		Finish:		No. of lamps:			accessible area for maintenance.	Cut out:		99
P1	Globe Mini		FIIIISII.		Base:			03. Manufacturer to confirm	cut out.		
	Globe Willi		Control Gear		Voltage:				Suspension:		154/
	Location:	Green Rooms	control dear		Beam Angle:			chact qty of anversiteq a.	Juspension.		
	2000000	dicell library			CCT:				Weight:		
	Contact:		Total Load:	27.0 W	CRI:				0		
	Email:		IP Rating:		TM66:				Lumen/Wat	t	
	Number:		LOR:		Lumen Output:						45/17.1"
	Luminaire	Feature Pendant	Company:	TBC	Lamp Type:		Notes:	01. Contractor to refer to	Length:		
	Name:		,					manufacturer for	- 0-		
	Description	: Refurbished herritage pendant - Clover shape	Product		Manufacturers	TBC		installation details.	Diameter:		
			Code:					02. Drivers to be located in a			
			Accessories:		Wattage:	20.0 W		well-ventilated and	Height:		
								accessible area for			
P2			Finish:		No. of lamps:			maintenance.	Cut out:		
1 4					Base:			03. Manufacturer to confirm			
			Control Gear	:	Voltage:			exact qty of drivers req'd.	Suspension:		
	Location:	GF Vestibule			Beam Angle:						
	Courtout		Total Lood	20.014	CCT:				Weight:		
	Contact: Email:			20.0 W	CRI: TM66:				Lumen/Wat	+	
	Number:		IP Rating: LOR:		Lumen Output:				Lumen/ wat	.L	
				TD0				24.0			
	Luminaire	Large Feature Pendant	Company:	TBC	Lamp Type:		Notes:	01. Contractor to refer to	Length:		
	Name:	: Large Feature Pendant - Restoration -	Product		Manufacturers	TDC		manufacturer for installation details.	Width:		
	Description	Large reactive Feridant - Nestoration -	Code:		ivialiulactuleis	TBC		02. Drivers to be located in a	vviutii.		
			Accessories:		Wattage:	50.0 W		well-ventilated and	Height:		
			7100033011031		viatuse.	30.0 **		accessible area for	110,5110		
D2			Finish:		No. of lamps:			maintenance.	Cut out:		
P3					Base:			03. Manufacturer to confirm			
			Control Gear		Voltage:			exact qty of drivers req'd.	Suspension:		
	Location:				Beam Angle:						
					CCT:				Weight:		
	Contact:		Total Load:	50.0 W	CRI:						
	Email:		IP Rating:		TM66:				Lumen/Wat	t	
	Number:		LOR:		Lumen Output:						
	Luminaire	Feature Pendant	Company:	TBC	Lamp Type:		Notes:		Length:		
	Name:							manufacturer for			
	Description	Refurbished herritage pendant	Product		Manufacturers	TBC		installation details.	Diameter:		
			Code:		14/-11	20.014		02. Drivers to be located in a	11-1-1-1		
			Accessories:		Wattage:	20.0 W		well-ventilated and accessible area for	Height:		
			Finish:		No. of lamps:			maintenance.	Cut out:		
P4			1111311.		Base:			03. Manufacturer to confirm	out out.		
			Control Gear		Voltage:				Suspension:		
	Location:		control deal		Beam Angle:			chast qty of allvers req a.	Juspension.		
	Location.				CCT:				Weight:		
	Contact:		Total Load:	20.0 W	CRI:						
	Email:		IP Rating:	-	TM66:				Lumen/Wat	t	
			0								

		Luminaire Name:	Plane Chandelier	Company:	Tom Dixon	Lamp Type:		Notes:	01. Contractor to refer to manufacturer for	Length:	940 mm	
			Feature Pendant - TBC	Product		Manufacturers:	TBC		installation details.	Diameter:	1056 mm	I
	Ĭ			Code: Accessories:		Wattage:	25.0 W		02. Drivers to be located in a well-ventilated and	Height:	940 mm	
25	2000			Finish:	Brass	No. of lamps:			accessible area for maintenance.	Cut out:	7 4 5	
<b>'</b> 5	F. S.					Base:			03. Manufacturer to confirm	ı	1	
	all a			Control Gear:	:	Voltage:			exact qty of drivers req'd.	Suspension:		
		Location:				Beam Angle:						
						CCT:				Weight:		105.6 / 42"
		Contact:			25.0 W	CRI: TM66:				1		
		Email: Number:		IP Rating: LOR:		Lumen Output:				Lumen/Wat	L	
			Melt Small - Chandilier	Company:	Tom Dixon	Lamp Type:		Notes:	01. Contractor to refer to	Length:		
		Name:	Malt Small Chandilian	Duoduot		Manufacturers:	Tom Divon	_	manufacturer for installation details.	Diameter	980 mm	
		Description	Melt Small - Chandilier	Product Code:		ivianuiacturers:	TOTTI DIXOTI		02. Drivers to be located in a	Diameter:	980 111111	
				Accessories:		Wattage:	24.0 W		well-ventilated and	Height:	1030 mm	
				7100033011031		Tractage.	21.0 **		accessible area for	110151111	1050 IIIII	
21				Finish:		No. of lamps:			maintenance.	Cut out:	042	
21		Globe Mini				Base:			03. Manufacturer to confirm		7501	
				Control Gear:		Voltage:			exact qty of drivers req'd.	Suspension:		
		Location:	Green Rooms			Beam Angle:						
						CCT:				Weight:		
		Contact:		Total Load:	27.0 W	CRI:						98/38.6"
		Email:		IP Rating:		TM66:				Lumen/Wat	į.	
		Number:		LOR:		Lumen Output:						
			Recessed up-lighter	Company:	Luce&Light	Lamp Type:	LED	Notes:	01. Contractor to refer to	Length:		
		Name: Description:	Recessed up-lighter, outdoor & drive-over	Product	LT24001FUNV	Manufacturers:	Luce&Light		manufacturer for installation details.	Diameter:	58 mm	
			rated	Code:					02. Drivers to be located in a			
				Accessories:	Outer Casing WC4020 Glare Shield + Fixing Tube	Wattage:	3.5 W		well-ventilated and accessible area for	Height:	74 mm	5
				Finish:	Black	No. of lamps:	1		maintenance.	Cut out:		
						Base:			03. Manufacturer to confirm			
				Control Gear:	: DALI	Voltage:	24		exact qty of drivers req'd.	Suspension:		
		Location:				Beam Angle:	5°					Ø58
	DESCRIPTION					CCT:	2700K			Weight:	0.4 kg	
		Contact:		Total Load:		CRI:	90					
	recessed for outdoor applications; d			IP Rating:	IP67	TM66:				Lumen/Wat	t 81	
		Number:		LOR:		Lumen Output:	452 IM					
			Recessed up-lighter	Company:	Luce&Light	Lamp Type:		Notes:	01. Contractor to refer to	Length:	44 mm	
		Name:	December / in well as Pakes	Deadlest	NI/44204000504N	Mary for t	Luca O Lind :	_	manufacturer for	Diament	FO	
	8-	Description:	Recessed / in-wall up-lighter	Product	NK11201000F0AN	Manufacturers:	Luce&Light		installation details.	Diameter:	50 mm	44
				Code: Accessories:		Wattage:			<ol><li>O2. Drivers to be located in a well-ventilated and</li></ol>	Height:	50 mm	
				ACCESSUITES:		wattage.			accessible area for	ricigiit.	30 111111	
				Finish:	Black	No. of lamps:	1		maintenance.	Cut out:		50
				-		Base:			03. Manufacturer to confirm			
				Control Gear	DALI	Voltage:			exact qty of drivers req'd.	Suspension:		
		Location:				Beam Angle:						T. S.
	1.1					CCT:				Weight:		50
		Contact:		Total Load:		CRI:						4
		Email:		IP Rating:	IP66	TM66:				Lumen/Wat	16	
		Number:		LOR:		Lumen Output:						
			Floodlight	Company:	iGuzzini	Lamp Type:	LED	Notes:	01. Contractor to refer to	Length:	56 mm	
		Luminaire Name:	Floodlight Floodlight neutral white LED with superspot		iGuzzini iPro51 BJ91.701.0	Lamp Type:  Manufacturers:		Notes:	01. Contractor to refer to manufacturer for installation details.	Length: Diameter:		56

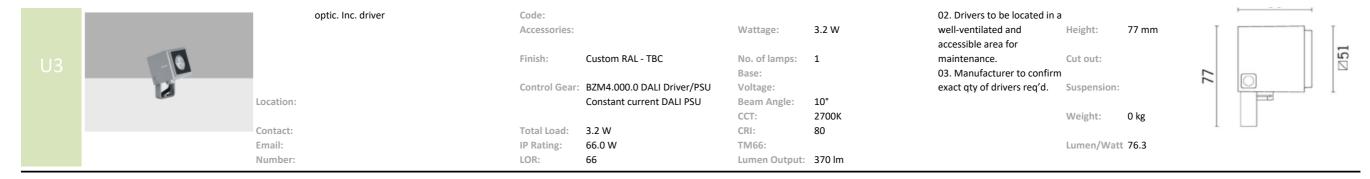

		Luminaire	Floodlight	Company:	iGuzzini	Lamp Type:	LED	Notes:	01. Contractor to refer to	Length:	56 mm	
		Name:							manufacturer for			
		Description:	Floodlight neutral white LED with superspot	Product	iPro51 BJ91.701.0	Manufacturers:	iGuzzini	_	installation details.	Diameter:	51 mm	56
			optic. Inc. driver	Code:					02. Drivers to be located in a	9		
				Accessories:		Wattage:	3.2 W		well-ventilated and	Height:	77 mm	
									accessible area for			
	- 18 l			Finish:	Custom RAL - TBC	No. of lamps:	1		maintenance.	Cut out:		
					D7144 000 0 D444 D : /D544	Base:			03. Manufacturer to confirm			
	[2]	Lasations		Control Gear	BZM4.000.0 DALI Driver/PSU	Voltage:	109		exact qty of drivers req'd.	Suspension:		
		Location:			Constant current DALI PSU	Beam Angle: CCT:	10° 2700K			Weight:	0 kg	
		Contact:		Total Load:	3.2 W	CRI:	80			weight.	0 kg	
		Email:		IP Rating:	66.0 W	TM66:	00			Lumen/Wat	t 76 3	
		Number:		LOR:	66	Lumen Output:	370 lm			Lumen, wat	. 70.5	
			LED To a 2700K Mb. Le					Mata	04. Carterdanta refer to	L th.		
		Luminaire Name:	LED Tape - 2700K White	Company:	Technical Arts	Lamp Type:	LED	Notes:	01. Contractor to refer to manufacturer for	Length:	see lengths	
			LED Tape - 2700K White	Product	TA-2835-24-240 (60mA)	Manufacturers:	Technical Arts		installation details.	Diameter:	-	
		Description.	LLD Tape - 2700K Willie	Code:	1A-2033-24-240 (0011A)	ivialiulactuleis.	recillical Alts		02. Drivers to be located in a		10 111111	
					X1 Extrusion	Wattage:	19.2 W		well-ventilated and	Height:		
				7100000011001	7.2 EX. 00.0.1		23.2 **		accessible area for			
1.1	Mirror -		3M-300LSE tape backing	Finish:		No. of lamps:			maintenance.	Cut out:		
L1			35cm cable at both ends			Base:			03. Manufacturer to confirm	ı		
	Mary Mary Control of the Control of			Control Gear	specified seperately	Voltage:	24		exact qty of drivers req'd.	Suspension:		
	was to provide the state of the state of	Location:				Beam Angle:						
						CCT:	2700 K			Weight:		
		Contact:		Total Load:	19.2 W	CRI:	90					
		Email:		IP Rating:		TM66:				Lumen/Wat	t 110	
		Number:		LOR:		Lumen Output:						
		Luminaire	LED Tape - RGBW (2700K White) - In Standard	Company:	Technical Arts	Lamp Type:	LED	Notes:	01. Contractor to refer to	Length:	7596 mm	
		Name:	Extrusion						manufacturer for			
	Commence of the Commence of th	Description:	LED Tape - RGBW (2700K White) - In Standard		TA-2835-24-240 (60mA)	Manufacturers:	Technical Arts		installation details.	Diameter:	1300 mm	
			Extrusion	Code:					02. Drivers to be located in a			
				Accessories:		Wattage:	19.2 W		well-ventilated and	Height:		
			2M 2001 CE tana hashing	Finish:		No of lawns			accessible area for maintenance.	Cut out:		ıνζ
L3			3M-300LSE tape backing 35cm cable at both ends	FINISH:		No. of lamps: Base:			03. Manufacturer to confirm			7
			33cm cable at both ends	Control Gear	- DMY	Voltage:	24		exact qty of drivers req'd.	Suspension:		12,5
		Location:		control dear	. DIVIX	Beam Angle:	24		exact qty of drivers req d.	Juspension.		17,3
		_500010111				CCT:	RGBW (2700k)			Weight:		1/13
		Contact:		Total Load:	19.2 W	CRI:	90					
		Email:		IP Rating:		TM66:				Lumen/Wat	t 110	
		Number:		LOR:		Lumen Output:				-		

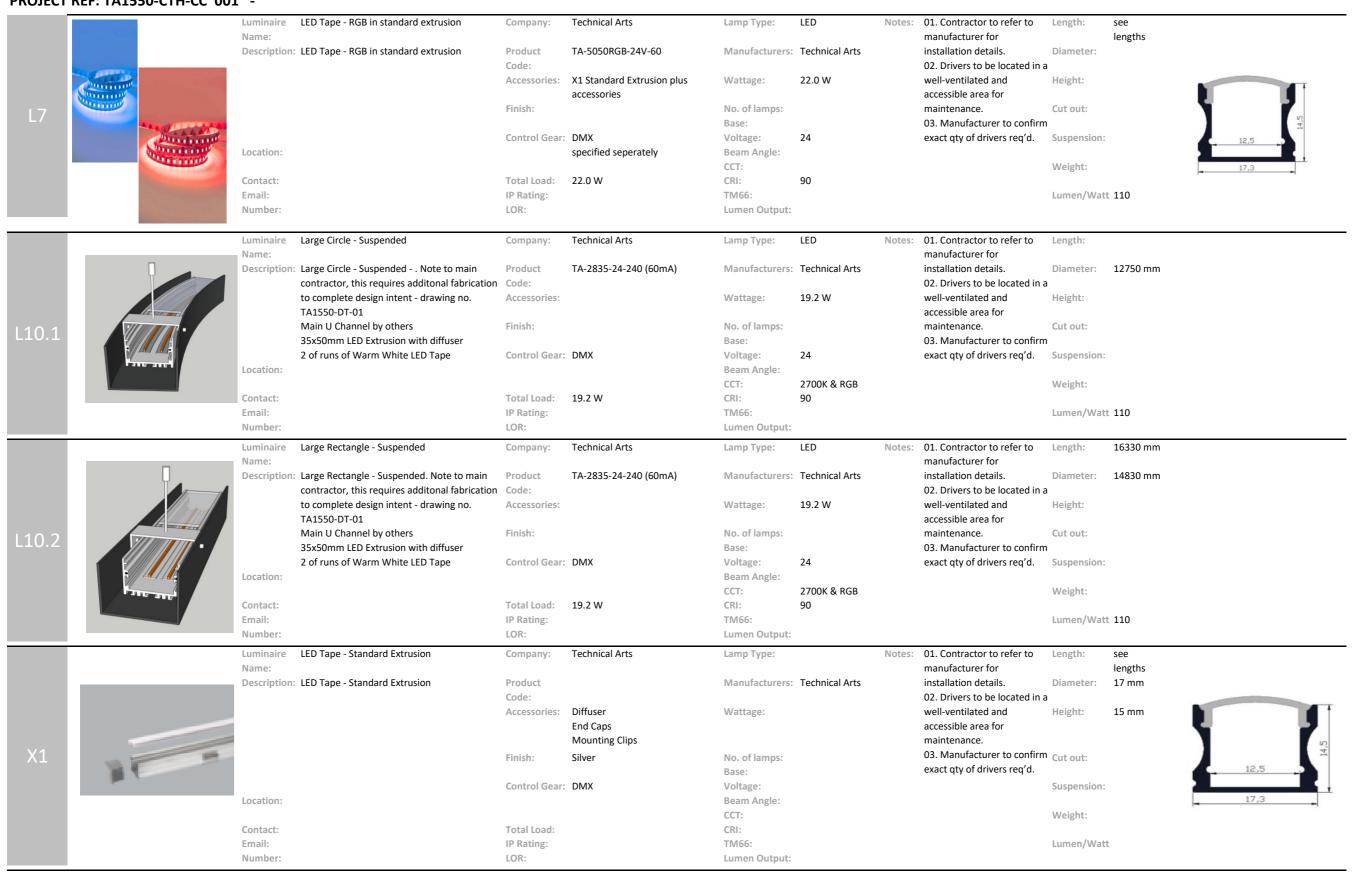

		Luminaire	LED Tape - Extrusion 35mmx35mm	Company:	Technical Arts	Lamp Type:		Notes:	01. Contractor to refer to	Length:	see	
		Name:							manufacturer for		lengths	
		Description:	LED Tape - Extrusion 35mmx35mm	Product		Manufacturers:	Technical Arts		installation details.	Diameter:	35 mm	
				Code:	2:11				02. Drivers to be located in a		25	
				Accessories:	Diffuser, end caps & clips	Wattage:			well-ventilated and accessible area for	Height:	35 mm	
				Finish:	Silver	No. of lamps:			maintenance.	Cut out:		
X2				FIIIISII.	Silvei	Base:			03. Manufacturer to confirm			
	a. a.			Control Gear:	DMX	Voltage:			exact qty of drivers reg'd.	Suspension:		/ 50m\roll , 100m\roll
		Location:				Beam Angle:						
						CCT:				Weight:		
		Contact:		Total Load:		CRI:						Ballad Illia data as
		Email:		IP Rating:		TM66:				Lumen/Wat	t	
		Number:		LOR:		Lumen Output:						
		Luminaire	DALI 2 + PUSH dimmable power supply unit	Company:	Luce&Light	Lamp Type:		Notes:	01. Contractor to refer to	Length:	232 mm	
		Name:						_	manufacturer for			25 St 85
		Description:	DALI 2 + PUSH dimmable power supply unit	Product	AV0D024V15066	Manufacturers:	Luce&Light		installation details.	Diameter:		Ou
				Code:					02. Drivers to be located in a	a		
				Accessories:		Wattage:	150.0 W		well-ventilated and	Height:	25 mm	874] 253.8 [9.992] 200[7.874]
									accessible area for			
Y2				Finish:		No. of lamps:			maintenance.	Cut out:		279 [10.984]
	18.3			Control Gear:	DALL-2	Base: Voltage:	24V		<ol><li>O3. Manufacturer to confirm exact qty of drivers req'd.</li></ol>	Suspension:		219 [10.304]
		Location:		control dear.	DALI-2	Beam Angle:	24 V		exact qty of universiteq u.	Suspension.		<u> </u>
		LOCULIOIII				CCT:				Weight:	1 kg	5 [0, 197]
		Contact:		Total Load:		CRI:				0	0	267.5 [10.531]
		Email:		IP Rating:		TM66:				Lumen/Wat	t	(0)
		Number:		LOR:		Lumen Output:						
		Luminaire	LinearDrive 720D	Company:	EldoLED	Lamp Type:		Notes:	01. Contractor to refer to	Length:	153 mm	
		Name:				_			manufacturer for			
		Description:	24A DMX/RDM/DALI Full colour dimmable	Product	LIN720D3	Manufacturers:			installation details.	Diameter:		
			LED Driver. 4 Control channels, constant	Code:					02. Drivers to be located in a			
	essted		voltage	Accessories:		Wattage:			well-ventilated and	Height:	23 mm	
	LINE AN CONTROL								accessible area for			w
Y3	Annualizate (EID Desertionalizate April 1997)  Annualizate (EID Desertio			Finish:		No. of lamps:			maintenance.	Cut out:		
				Control Coor	DMX/RDM/DALI	Base: Voltage:	12 - 48V		<ol> <li>Manufacturer to confirm exact qty of drivers reg'd.</li> </ol>	Suspension:		L H
		Location:		Control Gear.	DIVIX/RDIVI/DALI	Beam Angle:	12 - 40V		exact qty of universiteq u.	Suspension.		Length (L) typical: 153 mm / 6.02 in  Width (W) typical: 50 mm / 1.97 in
		200000011.				CCT:				Weight:	0.2 kg	Height (H) typical: 23 mm / 0.91 in
		Contact:		Total Load:		CRI:					0	Weight 144 g
		Email:		IP Rating:		TM66:				Lumen/Wat	t	

Luminaire EldoLED SOLODrive DALI CC Driver Company: EldoLED Name:	Notes: 01. Contractor to refer to Length: manufacturer for
Description: EldoLED SOLODrive DALI CC Driver Product SOLODrive Code:	
Accessories:	Wattage: well-ventilated and Height:  accessible area for
Y4	No. of lamps: maintenance. Cut out:
Control Gear:	Base: 03. Manufacturer to confirm  Voltage: exact qty of drivers req'd. Suspension:
Location:	Beam Angle: CCT: Weight:
Contact: Total Load:	CRI:
Email: IP Rating:	TM66: Lumen/Watt
Number: LOR:	Lumen Output:
Luminaire Direct current electronic drivers with DIP- Company: Luce&Light Name: SWITCH	ight Lamp Type: Notes: 01. Contractor to refer to Length: 220 mm manufacturer for
Description: Direct current electronic drivers with DIP- Product AD030DAI SWITCH Code:	DALIT1AM Manufacturers: Luce&Light installation details. Diameter:  02. Drivers to be located in a
Accessories:  Finish:  Control Gear: DALI-2	Wattage: well-ventilated and Height: 21 mm accessible area for
Y5	No. of lamps: maintenance. Cut out:
	Base: 03. Manufacturer to confirm
Control Gear: DALI-2 Location:	Voltage: 12 - 52V exact qty of drivers req'd. Suspension:  Beam Angle:
	CCT: Weight: 1 kg
Contact: Total Load:	CRI:
Email: IP Rating: Number: LOR:	TM66: Lumen/Watt
	Lumen Output:
Luminaire 6A DMX/RDM Full-Colour Dimmable LED Company: EldoLED Name: Driver	manufacturer for
Description: LED Driver 180W - 4 Control channels, Product LIN180D3	D3 Manufacturers: installation details. Diameter:
constant voltage Code:	02. Drivers to be located in a
Accessories:	Wattage: well-ventilated and Height: 23 mm accessible area for
Accessories:	Wattage: well-ventilated and accessible area for No. of lamps: maintenance. Cut out:
Y6	Wattage:  well-ventilated and Height: 23 mm accessible area for  No. of lamps:  maintenance.  Cut out:  Base:  03. Manufacturer to confirm
Y6  Accessories:  Finish:  Control Gear: DMX/RDM	Wattage:  Well-ventilated and accessible area for  No. of lamps:  Base:  O3. Manufacturer to confirm  Voltage: 12 - 28V  Wattington:  Wattington:  Wattington:  Suspension:  Wattington:  Length (L)  Worth (V)  Hospital 50 mm / 1.97 in  Hospital 50 mm / 1.97 in  Hospital 21 mm / 0.91 in
Accessories: Finish: Control Gear: DMX/RDM	Wattage:  Well-ventilated and accessible area for  No. of lamps:  Base:  O3. Manufacturer to confirm  Exact qty of drivers req'd.  Weight:  O2. kg
Accessories: Finish: Control Gear: DMX/RDM  Contact: Total Load:	Wattage:  Well-ventilated and accessible area for  No. of lamps:  Base:  O3. Manufacturer to confirm  Example:  CCT:  CCT:  CRI:  Weight:  Weight:  Weight:  Weight:  23 mm  Accessible area for  Wount (0)  Would (15) In
Accessories: Finish: Control Gear: DMX/RDM	Wattage:  Well-ventilated and accessible area for  No. of lamps:  Base:  O3. Manufacturer to confirm  Example:  CCT:  Weight:  Weight:  Weight:  DAM  Wattage:  Weight:  23 mm  Accessible area for  Wattage:  Cut out:  Langth (A)  Typical 153 mm / 6.02 in  Wattage:  Voltage:  Langth (A)  Voltage:
Y6  Control Gear: DMX/RDM  Location:  Contact: Email: Number: LUR: Luminaire 20W DALI-2 (DIM TO DARK) LED DRIVER Company: Phos	Wattage:  Well-ventilated and accessible area for maintenance.  No. of lamps: Base:  O3. Manufacturer to confirm Voltage: 12 - 28V Beam Angle:  CCT: CCT: CCT: CCR: TM66: Lumen Output:  Lamp Type:  Notes:  O1. Contractor to refer to  Length: 183 mm
Accessories:  Finish:  Control Gear: DMX/RDM  Location:  Contact: Email: Number: LUR: Luminaire 20W DALI-2 (DIM TO DARK) LED DRIVER Company: Phos Name: Description: 20W DALI-2 (DIM TO DARK) LED DRIVER - For Product ELD-GENE	Wattage:  No. of lamps: Base:  O3. Manufacturer to confirm exact qty of drivers req'd.  Weight:  CCT: CRI: TM66: Lumen Output:  Lamp Type:  Notes:  Notes:  Notes:  Notes:  Notes:  Notes:  Notes:  Notes:  Notes: Notes:  Notes: Notes:  Notes:
Y6  Location:  Contact: Email: Number:  Luminaire Description: 20W DALI-2 (DIM TO DARK) LED DRIVER Company: Description: 20W DALI-2 (DIM TO DARK) LED DRIVER - For dynamic white light applications  Accessories: Finish: Control Gear: DMX/RDM  Total Load: IP Rating: LOR: LUM TO DARK) LED DRIVER Company: Phos  Rame: Code:	Wattage:  No. of lamps: Base:  O3. Manufacturer to confirm  exact qty of drivers req'd.  Weight:  CCT: CCT: CRI: TM66: Lumen Output:  Lamp Type:  Notes:  Notes:  Notes:  Notes:  Notes:  Notes:  Notes: O1. Contractor to refer to manufacturer to manufacturer for installation details. O2. Drivers to be located in a
Y6  Location:  Control Gear: DMX/RDM  Control Gear: DMX/RDM  Contact: Total Load: IP Rating: LOR:  Luminaire Number: LOR:  Luminaire Description: 20W DALI-2 (DIM TO DARK) LED DRIVER Company: Phos dynamic white light applications  Accessories:  Finish:  Control Gear: DMX/RDM  Location:  Total Load: IP Rating: LOR:  LOR:  Luminaire OW DALI-2 (DIM TO DARK) LED DRIVER Company: Phos Code: Accessories: Accessories:	Wattage:  Well-ventilated and accessible area for maintenance.  DM Voltage: 12 - 28V exact qty of drivers req'd.  Beam Angle: CCT: CCT: CTM66: Lumen Output:  Lamp Type:  Notes: 01. Contractor to refer to manufacturer for installation details.  DIAM Manufacturers: Phos  Well-ventilated and accessible area for maintenance. Cut out: Lurgh (1) byook 150 mm 162 to 1 H  Lurgh (2) byook 150 mm 162 to 1 H  Lurgh (3) byook 150 mm 162 to 1 H  Lurgh (4) byook 150 mm 162 to 1 H  Lurgh (5) byook 150 mm 162 to 1 H  Lurgh (6) byook 150 mm 162 to 1 H  Lurgh (7) byook 150 mm 162 to 1 H  Lurgh (8) byook 150 mm 162 to 1 H  Lurgh (9) byook 150 mm 162 to 1 H
Accessories:  Finish:  Control Gear: DMX/RDM  Location:  Contact: Email: Number:  Luminaire Description: 20W DALI-2 (DIM TO DARK) LED DRIVER Company: When the company of t	Wattage:  Well-ventilated and accessible area for maintenance.  Out out:  Cut out:  Cu
Accessories:  Finish:  Control Gear: DMX/RDM  Location:  Contact: Email: Number: LUR: LUMINAIRE 20W DALI-2 (DIM TO DARK) LED DRIVER Company: Phos Name: Description: 20W DALI-2 (DIM TO DARK) LED DRIVER - For dynamic white light applications  Code: Accessories:	Well-ventilated and accessible area for maintenance.  No. of lamps: Base:  O3. Manufacturer to confirm  Exact qty of drivers req'd.  Weight:  CCT:  CRI:  TM66:  Lumen Output:  Lamp Type:  Notes:  Notes:  Notes:  O1. Contractor to refer to manufacturer for installation details.  O2. Drivers to be located in a well-ventilated and accessible area for maintenance.  Wattage:  23 mm  Weight:  Voltage:  12 - 28V  Exact qty of drivers req'd.  Weight:  O.2 kg  CRI:  TM66:  Lumen/Watt  Lumen/Watt  Lumen/Watt  Lumen/Watt  Diameter:  O2. Drivers to be located in a well-ventilated and height:  Wattage:  O3. Manufacturer to confirm  Wattage:  O3. Manufacturer to confirm
Accessories:  Finish:  Control Gear: DMX/RDM  Location:  Contact: Email: Number:  Luminaire Name: Description: 20W DALI-2 (DIM TO DARK) LED DRIVER Company: Phos dynamic white light applications  Phose Code: Accessories:  Y7	Wattage: well-ventilated and accessible area for maintenance. Cut out:  Base: 03. Manufacturer to confirm exact qty of drivers req'd. Suspension:  Beam Angle: Weight: 0.2 kg  CCT: Weight: 0.2 kg  CRI: TM66: Lumen Output:  Lamp Type: Notes: 01. Contractor to refer to manufacturer for installation details. Diameter:  02. Drivers to be located in a Wattage: 20.0 W well-ventilated and accessible area for maintenance. Cut out:  Wattage: C0.0 W well-ventilated and accessible area for maintenance. Cut out:  Base: 03. Manufacturer to confirm  Wattage: 20.0 W well-ventilated and accessible area for maintenance. Cut out:  Base: 03. Manufacturer to confirm
Accessories:  Finish:  Control Gear: DMX/RDM  Location:  Contact: Email: Number: Luminaire Name: Description: 20W DALI-2 (DIM TO DARK) LED DRIVER Company: dynamic white light applications  Accessories: Finish:  Control Gear: DMX/RDM  Control Gear: DMX/RDM  Finish:  Control Gear: DMX/RDM  Control Gear: DMX/RDM	Wattage:  No. of lamps: Base:  O3. Manufacturer to confirm  Voltage: 12 - 28V  Beam Angle:  CCT:  CRI:  TM66:  Lumen Output:  Lamp Type:  Notes:  Notes:  O1. Contractor to refer to manufacturer for installation details.  O2. Drivers to be located in a Wattage:  Voltage:  Voltage:  20.0 W  Wattage:  Voltage:  O3. Manufacturer to confirm  Wattage:  O3. Manufacturer to confirm  Voltage:  Voltage:  O3. Manufacturer to confirm  Voltage:
Accessories:  Finish:  Control Gear: DMX/RDM  Location:  Contact: Email: Number:  Luminaire Name: Description: 20W DALI-2 (DIM TO DARK) LED DRIVER - For dynamic white light applications  Phose Product Code: Accessories:  Finish:  Control Gear: DALI-2  Location:	Wattage: well-ventilated and accessible area for maintenance.  No. of lamps: maintenance.  Ot out: Lamp No. of lamps: lamp Angle: CCT: CRI: Lumen Output:  Lamp Type: Notes: O1. Contractor to refer to manufacturer for installation details. O2. Diameter:  Wattage: 20.0 W well-ventilated and accessible area for maintenance. Cut out: Lumen Watt  Wattage: 20.0 W well-ventilated and accessible area for maintenance. Cut out: Weight: 0.3 kg  Weight: 0.2 kg  Weight: 0.2 kg  Lumen/Watt  Lumen/Watt  Lumen/Watt  Lumen/Watt  Lumen/Watt  Wattage: 20.0 W well-ventilated and accessible area for maintenance. Cut out: Weight: 0.3 kg  Weight: 0.3 kg  Weight: 0.3 kg

Coation:		REF: TA1550-CTH-CC 001	<u> </u>										
Product Information Data 7 Centred Glamable 157 officer  Accessories:  Vivillage: Vivill			Luminaire	DALI-2 Certified LED driver	Company:	Phos	Lamp Type:		Notes:	01. Contractor to refer to	Length:	155 mm	155.1
V10  Close   Code   Cod										manufacturer for			
Water of the control			Description:	DALI-2 Certified Dimmable LED driver		INF20DALI	Manufacturers	Phos					
Finish:    Control Grain   DAL-2   Date   DA													
Problem   Proble		10.			Accessories:		Wattage:	21.0 W			Height:	29 mm	
Location:  Control Gear: DAL-2  Voltage: 2 - 40V  Base: Advantage: Advantage		and the same of th			Finish:		No of lamps:				Cut out		
Voltage: 2 - 440 east gy of drivers regid. Supposition:    Contact:   Total Loads   CCT:   CCT:   Weight: 0.2 kg   Contact   CCT:   CCT	Y8				FIIIISII.								38.3
Contact: Email: Finish: Finish					Control Gear	: DALI-2		2 - 40V					
Contract: Email: Number: Visit   Printing: Pri			Location:			57.2. 2		0.		chaot qty or arrest req ar	04000000000		
Number: LDR: Lumen Output: Location: Location: Lumen Output: Location: Location: Location: Lumen Output: Lumen Out							_				Weight:	0.2 kg	
Number: LOR: Lummon Optoput:  Usual Authority of Product Floration Control Gear: DALL Description Single Channel DAL-PC Interface Company: Feelux Lummon Optoput:  Product Floration Control Gear: DALL Voltage: 24V control Gears DALL Control Gear: DALL Control G			Contact:		Total Load:		CRI:						<b>A</b> 29
Wattage: 10.0 W weight: 0.2 kg  Location:  Location:  Control Gear: DALI  Uniminative  Discription:  Location:  Control Gear: DALI  Location:  Control Gear: DALI  Luminative  Description: Driver for Large Feature Chandeller  Description: Driver for Large Feature Chandeller  Accessories:  Accessories:  Wattage:  Control Gear: DALI  Voltage: 24V  Base:  Control Gear: DALI  Luminative  Description: Driver for Large Feature Chandeller  Description: Driver for Large Feature Chandeller  Accessories:  Wattage:  Wattage:  Wattage:  Wattage:  Wattage:  Wattage:  Wattage:  O2. Control Control Gear:  Wattage:  O3. Manufacturers:  Luminative Driver for Large Feature Chandeller  Accessories:  Wattage:  Wattage:  Wattage:  O3. Manufacturers:  O3. Manufacturers:  Control Gear:  O4. Control Gears:  Wattage:  O5. Manufacturers:  O5. Manufacturers:  O5. Manufacturers:  O6. Control Gears:  Weight:  O6. Voltage:  O6. Control Gears:  O7. Mores ob located in a well-verticated and accessible area for manufacturer for installation details.  O6. Of Lamp Vispe:  O6. Control Gears:  O7. Manufacturers:  O7. Manufact			Email:		IP Rating:		TM66:				Lumen/Wat	t	
Name: Description: Single Channel DAL-DC Interface Description: Driver for Large Feature Chandelier Description: Phase Cut-DAU Driver Description: Phase Cut-DAU Driver Description: Phase Cut-DAU Driver Description: Phase Cut-DAU Driver Product Manufacturers: T8C Description: Phase Cut-DAU Driver Description: Phase Cut-D			Number:		LOR:		Lumen Output:						
Product For Line face Code:  Code:  Code:  Code:  Code:  Code:  Contract Gear DALI - Description: Single Channel DALI - Description: Date of Code:  C			Luminaire	DALI-DC Interface	Company:	Feelux	Lamp Type:		Notes:	01. Contractor to refer to	Length:	108 mm	
Margin   Code:   Watage:   100.0 W   well-wettlisted and   Height: 20 mm   accessible area for maintenance.   Cut out:   Wellpht:   20 mm   Margin   Margi													
Accessories: Wattage: 100.0 W well-ventilated and scessible area for maintenance. Cut out:    Finish: No. of lamps: maintenance. Cut out:   Beane: 0.3. Manufacturer to confirm			Description:	Single Channel DALI-DC Interface		FDD-LIDA	Manufacturers	Feelux					
Finish:  No. of lamps: maintenance. Cot out: Base: Control Gear: DALI  Control Gear: D													
Finish:  No. of lamps: Base: 0.3. Manufacturer to confirm exact cty of drivers reg d. Suspension:  Beam Angle: Contact: Email: In Pasting: Diver for Large Feature Chandeller Product Code:  Accessories:  Control Gear: Description: Diver for Large Feature Chandeller  Code: Code: Control Gear: Description: Diver for Large Feature Chandeller Code: Code: Control Gear: Code:					Accessories:		Wattage:	100.0 W			Height:	20 mm	
Control Gear: DALI  Location:  Contact: Email: Number: Description: Private Control Gear: Control Gear: DALI  Control Gear: DA	1110	MODIL FOO-CEMICO nodes INPUT DOG SIGNAL DALI OUTPUT DO SIV LED MIX 200W			Finish:		No of lamps:				Cut out:		
Voltage: 24V exact qsy of drivers reg'd.  Location:  Contact: Email: Roumber:  Description: Driver for Large Feature Chandeller Code:  Accessories:  Control Gear: DALI  Voltage: 24V Beam Angle: CCT: CCT: CCT: CCT: CCT: CCT: CCT: CC	Y9	CAITCH Rise of each shock, Publishe for Convince Southern Convinces Convince Southern Convinces			1111311.								
Contact:   Total Load:   CRI:   CCT:   Weight: 0.2 kg		1 <sub>ch</sub> DATI			Control Gear:	DALI		24V					
Contact: Email: Number:  Luminatire Number:  Luminatire Number:  Luminatire Number:  Luminatire Number:  Luminatire Number:  Luminatire Number:  Description: Driver for Large Feature Chandelier Necessories:  Accessories:  No. of lamps: No.			Location:				Beam Angle:						← B →
Email: Number: LPR atting: LPR atting: Lumen Output: Lum							CCT:				Weight:	0.2 kg	
Number: LOR: Lumen Output:    Company: TBC   Lump Type: Note: O1. Contractor to refer to manufacturer for manufacturer for manufacturer for log. TBC   Lump Type: Note: O1. Contractor to refer to manufacturer for manufacturer for log. TBC   Lump Type: Note: O1. Contractor to refer to log. TBC   Lump Type: Note: O1. Contractor to refer to log. TBC   Lump Type: Note: O2. Drivers to be located in a cacessible area for maintenance. O2. Drivers to be located in a cacessible area for manufacturer to confirm log. TBC   Lump Type: Note: O1. Contractor to refer to log. TBC   Lump Type: Note: O1. Contractor to refer to log. TBC   Lump Type: Note: O1. Contractor to refer to log. TBC   Lump Type: Note: O1. Contractor to refer to log. TBC   Lump Type: Note: O1. Contractor to refer to manufacturer for log. TBC   Lump Type: Note: O1. Contractor to refer to log. TBC   Lump Type: Note: O1. Contra			Contact:		Total Load:								
Luminaire Name: Description: Driver for Large Feature Chandeller Name: Description: Driver for Large Feature Chandeller Driver for Large Feature Chandeller Product Accessories: Wattage: No. of lamps: Base: Ontrol Gear: Control					_						Lumen/Wat	t	
Name: Description: Driver for Large Feature Chandeller Code:  Accessories:  Wattage: Wattage: Well-ventilated and Accessories accessible area for maintenance. Cut out: Base: O3, Manufacturer to confirm exact qty of drivers req'd. Suspension:  Location:  Location:  Contact: Contact: Email: PRating: Total Load: Coft: Email: Number: LUR: URB COMPANY: DRESCUT-DALI Driver Description: Phase Cut - DALI Driver Description: Finish: No. of lamps: Mattage: Wattage: Well-wentilated and Accessible area for manufacturer for Installation details. Diameter: 20 mm accessible area for manufacturer for Installation details. Diameter: 20 mm accessible area for manufacturer for Installation details. Diameter: Volt out: Wattage: Well-wentilated and Accessible area for manufacturer for Installation details. Diameter: Code: Vatiout:			Number:		LOR:		Lumen Output:						
Poscription: Driver for Large Feature Chandelier    Product				Driver for Large Feature Chandelier	Company:	TBC	Lamp Type:		Notes:		Length:	108 mm	
Y10  Y10  Y10  Y10  Y10  Y10  Y10  Y10				Driver for Large Feature Chandelier	Duodinat		Manufacturara	TDC			Diameter		
Y10  Accessories: Wattage: well-ventilated and accessible area for accessible area for maintenance.  Finish: No. of lamps: accessible area for accessible area for maintenance.  Finish: No. of lamps: accessible area for accessible access			Description:	briver for Large Feature Chandeller			ivianulacturers	IBC					
Y10  Finish:  No. of lamps: Base:  Control Gear:  Control Gear:  Control Gear:  Contact:  Email: Number:  Email: Number:  Location:  Luminaire Phase Cut - DALI Driver  Name:  Description: Phase Cut - DALI Driver  Code:  Accessories:  Wattage:  Weight:  O.2 kg  Contract: CRI: Cumen Output:  Lumen Output:  Voltage:  Email: Number: Lor:  Lumen Output:  Weight:  O.2 kg  Contractor to refq to manufacturer for installation details. Diameter:  Code:  Q. Drivers to be located in a well-ventilated and a cecessible area for maintenance.  Weight:  O.2 kg  Contractor to refq to manufacturer for installation details. Diameter:  Code:  Q. Drivers to be located in a well-ventilated and a							Wattage:					20 mm	
Base: 03. Manufacturer to confirm  Control Gear: Voltage: exact qty of drivers req'd. Suspension:  Location: Beam Angle: CCT: Weight: 0.2 kg  Contact: Total Load: CRI: Email: IP Rating: TM66: Lumen Output:  Luminaire Phase Cut - DALI Driver Company: TBC Lumen Output:  Luminaire Phase Cut - DALI Driver Product Manufacturers: TBC installation details. Diameter: Code: Code: Accessories: Wattage: Wattage: Wattage: Wattage: Wattage: Cut out:  Weight: 0.2 kg  Contact: Lumen/Watt Lumen/											- 0		
Control Gear: Voltage: exact qty of drivers req'd. Suspension:  Location: Beam Angle: CCT: Weight: 0.2 kg  Contact: Total Load: CRI: Email: Number: LOR: Lumen Output:  Luminaire Name: Description: Phase Cut - DALI Driver Product Code:  Accessories: Wattage: Wattage: Wattage: Waltename. Cut out:  Weight: 0.2 kg  Lumen/Watt  Lumen/Watt  Lumen/Watt  Lor. Lumen Output:  Weight: 0.2 kg  Lumen/Watt  Lumen/Watt  Lumen/Watt  Lor. Lumen/Watt  Lor. Lumen Output:  Wattage: Wattage: Wattage: Wattage: Wattage: Cut out:	V10				Finish:		No. of lamps:			maintenance.	Cut out:		
Location:  Contact: Email: Number: LOR: LUminaire Phase Cut - DALI Driver Description: Phase Cut - DALI Driver Accessories: Description: Phase Cut - DALI Driver Description: Descriptio	I TO						Base:			03. Manufacturer to confirm			
CCT: Weight: 0.2 kg  Contact: Total Load: CRI: Email: IP Rating: TM66: Lumen/Watt Number: LOR: Lumen Output:  Luminaire Phase Cut - DALI Driver Company: TBC Lamp Type: Notes: 01. Contractor to refer to manufacturer for manufacturer for installation details. Diameter:  Description: Phase Cut - DALI Driver Product Code:  Accessories: Wattage: well-ventilated and Height: 20 mm accessible area for maintenance. Cut out:					Control Gear:		Voltage:			exact qty of drivers req'd.	Suspension:		
Contact: Email: IP Rating: TM66: Lumen Output:  Luminaire Phase Cut - DALI Driver Name:  Description: Phase Cut - DALI Driver Accessories: Wattage: Wattage: Well-ventilated and accessible area for Finish: No. of lamps: Mo. of lamps: Wattage: Watt			Location:										
Email: Number: LOR: TM66: Lumen Output:  Luminaire Name: Phase Cut - DALI Driver Company: TBC Lamp Type: Notes: 01. Contractor to refer to manufacturer for manufacturer for Description: Phase Cut - DALI Driver Product Manufacturers: TBC installation details. Diameter: Code:			0		T-1-1-1						Weight:	0.2 kg	
Number:  Luminaire Phase Cut - DALI Driver Company: TBC Lamp Type: Notes: 01. Contractor to refer to Length: 108 mm Name: Description: Phase Cut - DALI Driver Product Code: Code: Accessories: Wattage: well-ventilated and accessible area for maintenance.  V11  No. of lamps: TBC  Lamp Type: Notes: 01. Contractor to refer to Length: 108 mm manufacturer for installation details. Diameter: Value:											Lumon /\41-4		
Luminaire Phase Cut - DALI Driver Company: TBC Lamp Type: Notes: 01. Contractor to refer to Length: 108 mm  Name:  Description: Phase Cut - DALI Driver Product Code:  Code:  Accessories: Wattage: well-ventilated and accessible area for maintenance. Cut out:  V11					_						Lumen/ wat	L	
Name: Description: Phase Cut - DALI Driver Product Code: Accessories: Wattage: Watta				Phase Cut DAIL Driver		TDC			Notes	01 Contractor to refer to	Longth	100	
Description: Phase Cut - DALI Driver Product Manufacturers: TBC installation details. Diameter:  Code: Accessories: Wattage: well-ventilated and Height: 20 mm accessible area for Finish: No. of lamps: maintenance. Cut out:				Filase Cut - DALI DIIVEI	company:	IDC	ramp Type:		wotes:		rength:	100 111111	
Code: Accessories: Wattage: well-ventilated and Height: 20 mm accessible area for Finish: No. of lamps: maintenance. Cut out:				Phase Cut - DALI Driver	Product		Manufacturers	: TBC			Diameter:		
Accessories: Wattage: well-ventilated and Height: 20 mm accessible area for  Finish: No. of lamps: maintenance. Cut out:								-					
V11 Finish: No. of lamps: maintenance. Cut out:							Wattage:					20 mm	
Y										accessible area for			
	Y11				Finish:								
53. Withdistatic to Commit							Base:			03. Manufacturer to confirm			
Control Gear: Voltage: exact qty of drivers req'd. Suspension:			Landini		Control Gear:		_			exact qty of drivers req'd.	Suspension:		
Location:  Beam Angle:  CCT:  Weight: 0.2 kg			Location:								Weight:	0.2 kg	
CCT: Weight: 0.2 kg  Contact: Total Load: CRI:			Contact:		Total Load:						weigilt.	U.Z Kg	
Email: IP Rating: TM66: Lumen/Watt													
Number: LOR: Lumen Output:			Email:		IP Rating:		TM66:				Lumen/Wat	t	

PROJECT TITLE: Camden Town Hall - Camden Centre PROJECT REF: TA1550-CTH-CC 001 -

	REF. TAISSU-CITI-CC 00	Luminaire DALI Dimmer	Company:	Light Graphix	Lamp Type:		Notes:	01. Contractor to refer to	Length:	210 mm	_
		Name:	сотпраттут	Light Grupmix	Lump Type:		1404031	manufacturer for	201184111	210 111111	
		Description: DALI Dimmer	Product	TXDEL500DALI	Manufacturers:	TBC		installation details.	Diameter:	34 mm	
			Code:	17.5 225 005 7.2.		.50		02. Drivers to be located in a		•	
	`		Accessories:		Wattage:			well-ventilated and	Height:	40 mm	
	THE STATE OF THE S		7100000011001					accessible area for			
V/4.0			Finish:		No. of lamps:			maintenance.	Cut out:		
Y12	A				Base:			03. Manufacturer to confirm			
	100		Control Gea	r:	Voltage:			exact qty of drivers req'd.	Suspension		
		Location:			Beam Angle:			1,7			
					CCT:				Weight:	0.2 kg	
		Contact:	Total Load:		CRI:					. 0	
		Email:	IP Rating:		TM66:				Lumen/Wa	tt	
		Number:	LOR:		Lumen Output:						
		Luminaire HLG-600H-24A Power Supply	Company:	Meanwell	Lamp Type:		Notes:	01. Contractor to refer to	Length:	280 mm	
		Name:						manufacturer for	_		
		Description: 600W Constant voltage + constant current	Product	HLG-600H-24A	Manufacturers:	Meanwell		installation details.	Diameter:		
		LED driver	Code:					02. Drivers to be located in a	3		280 13.4 253.2
			Accessories:		Wattage:	600W		well-ventilated and	Height:	49 mm	× 1
								accessible area for			300±;
V1	100		Finish:		No. of lamps:			maintenance.	Cut out:		UL2517 22A
VΙ	MCAMPATAN AND AND AND AND AND AND AND AND AND A				Base:			03. Manufacturer to confirm	1		T case (8) 1200 VO
	Na Commence and Co		Control Gea	r:	Voltage:	12-54V		exact qty of drivers req'd.	Suspension	:	-F3X-L0mm/ 4.5.X4PL
		Location:			Beam Angle:						28±2
					CCT:				Weight:	4 kg	
		Contact:	Total Load:		CRI:						
		Email:	IP Rating:		TM66:				Lumen/Wa	tt	
		Number:	LOR:		Lumen Output:						
		Luminaire HLG-185H-24A	Company:	Meanwell	Lamp Type:		Notes:	01. Contractor to refer to	Length:	228 mm	
		Name:						manufacturer for			
		Description: 185W Constant Voltage Power Supply	Product	HLG-185H-24A	Manufacturers:	Meanwell		installation details.	Diameter:		228
			Code:					02. Drivers to be located in a	3		12 204
	A10 30		Accessories:		Wattage:	185.0 W		well-ventilated and	Height:	39 mm	9.0
	MO 1881 344							accessible area for			T case 102
V2			Finish:		No. of lamps:			maintenance.	Cut out:		ami*3C \$30W (\$J0 \$4.2x/
V Z					Base:			03. Manufacturer to confirm	1		*(b): Max. Case Temperature
			Control Gea	r:	_	12-54V		exact qty of drivers req'd.	Suspension		O . Masil case longitude
		Location:			Beam Angle:						
					CCT:				Weight:	2 kg	
		Contact:	Total Load:		CRI:						
		Email:	IP Rating:		TM66:				Lumen/Wa	tt	
		Number:	LOR:		Lumen Output:						

#### IMPORTANT NOTES:

- 1. Catalogue numbers are included for REFERENCE ONLY. They MUST be checked against the description with the manufacturer. If in doubt, contact Lighting Designer.
- 2. Please refer to Lighting Designer for any queries or anomalies regarding items described in this document, BEFORE ordering. IF IN DOUBT ASK.
- ${\bf 3. \, Supplier \, to \, coordinate \, with \, contractor \, to \, confirm \, all \, lengths \, and \, quantities \, prior \, to \, order.}$