

Site Boundary
Bay Study Location

PLANNING

rev date check comments
DSDHA
 357 Kennington Lane London SE11 5QY
 T 020 7703 3555
 F 020 7703 3890
 E info@dsha.co.uk
 W www.dsha.co.uk


project
 100 Chalk Farm Road

drawing title
 PBSA North Drum Bay Study Detail


drawn	size	date	scale
F1	A1	28/04/24	Varies

drawing number	revision
356_P50.012	A

REPORT DISCREPANCIES DO NOT SCALE FROM THIS DRAWING CHECK DIMENSIONS ON SITE
 USE LATEST REVISION CHECK DIMENSIONS ON SITE
 COPYRIGHT DSDHA

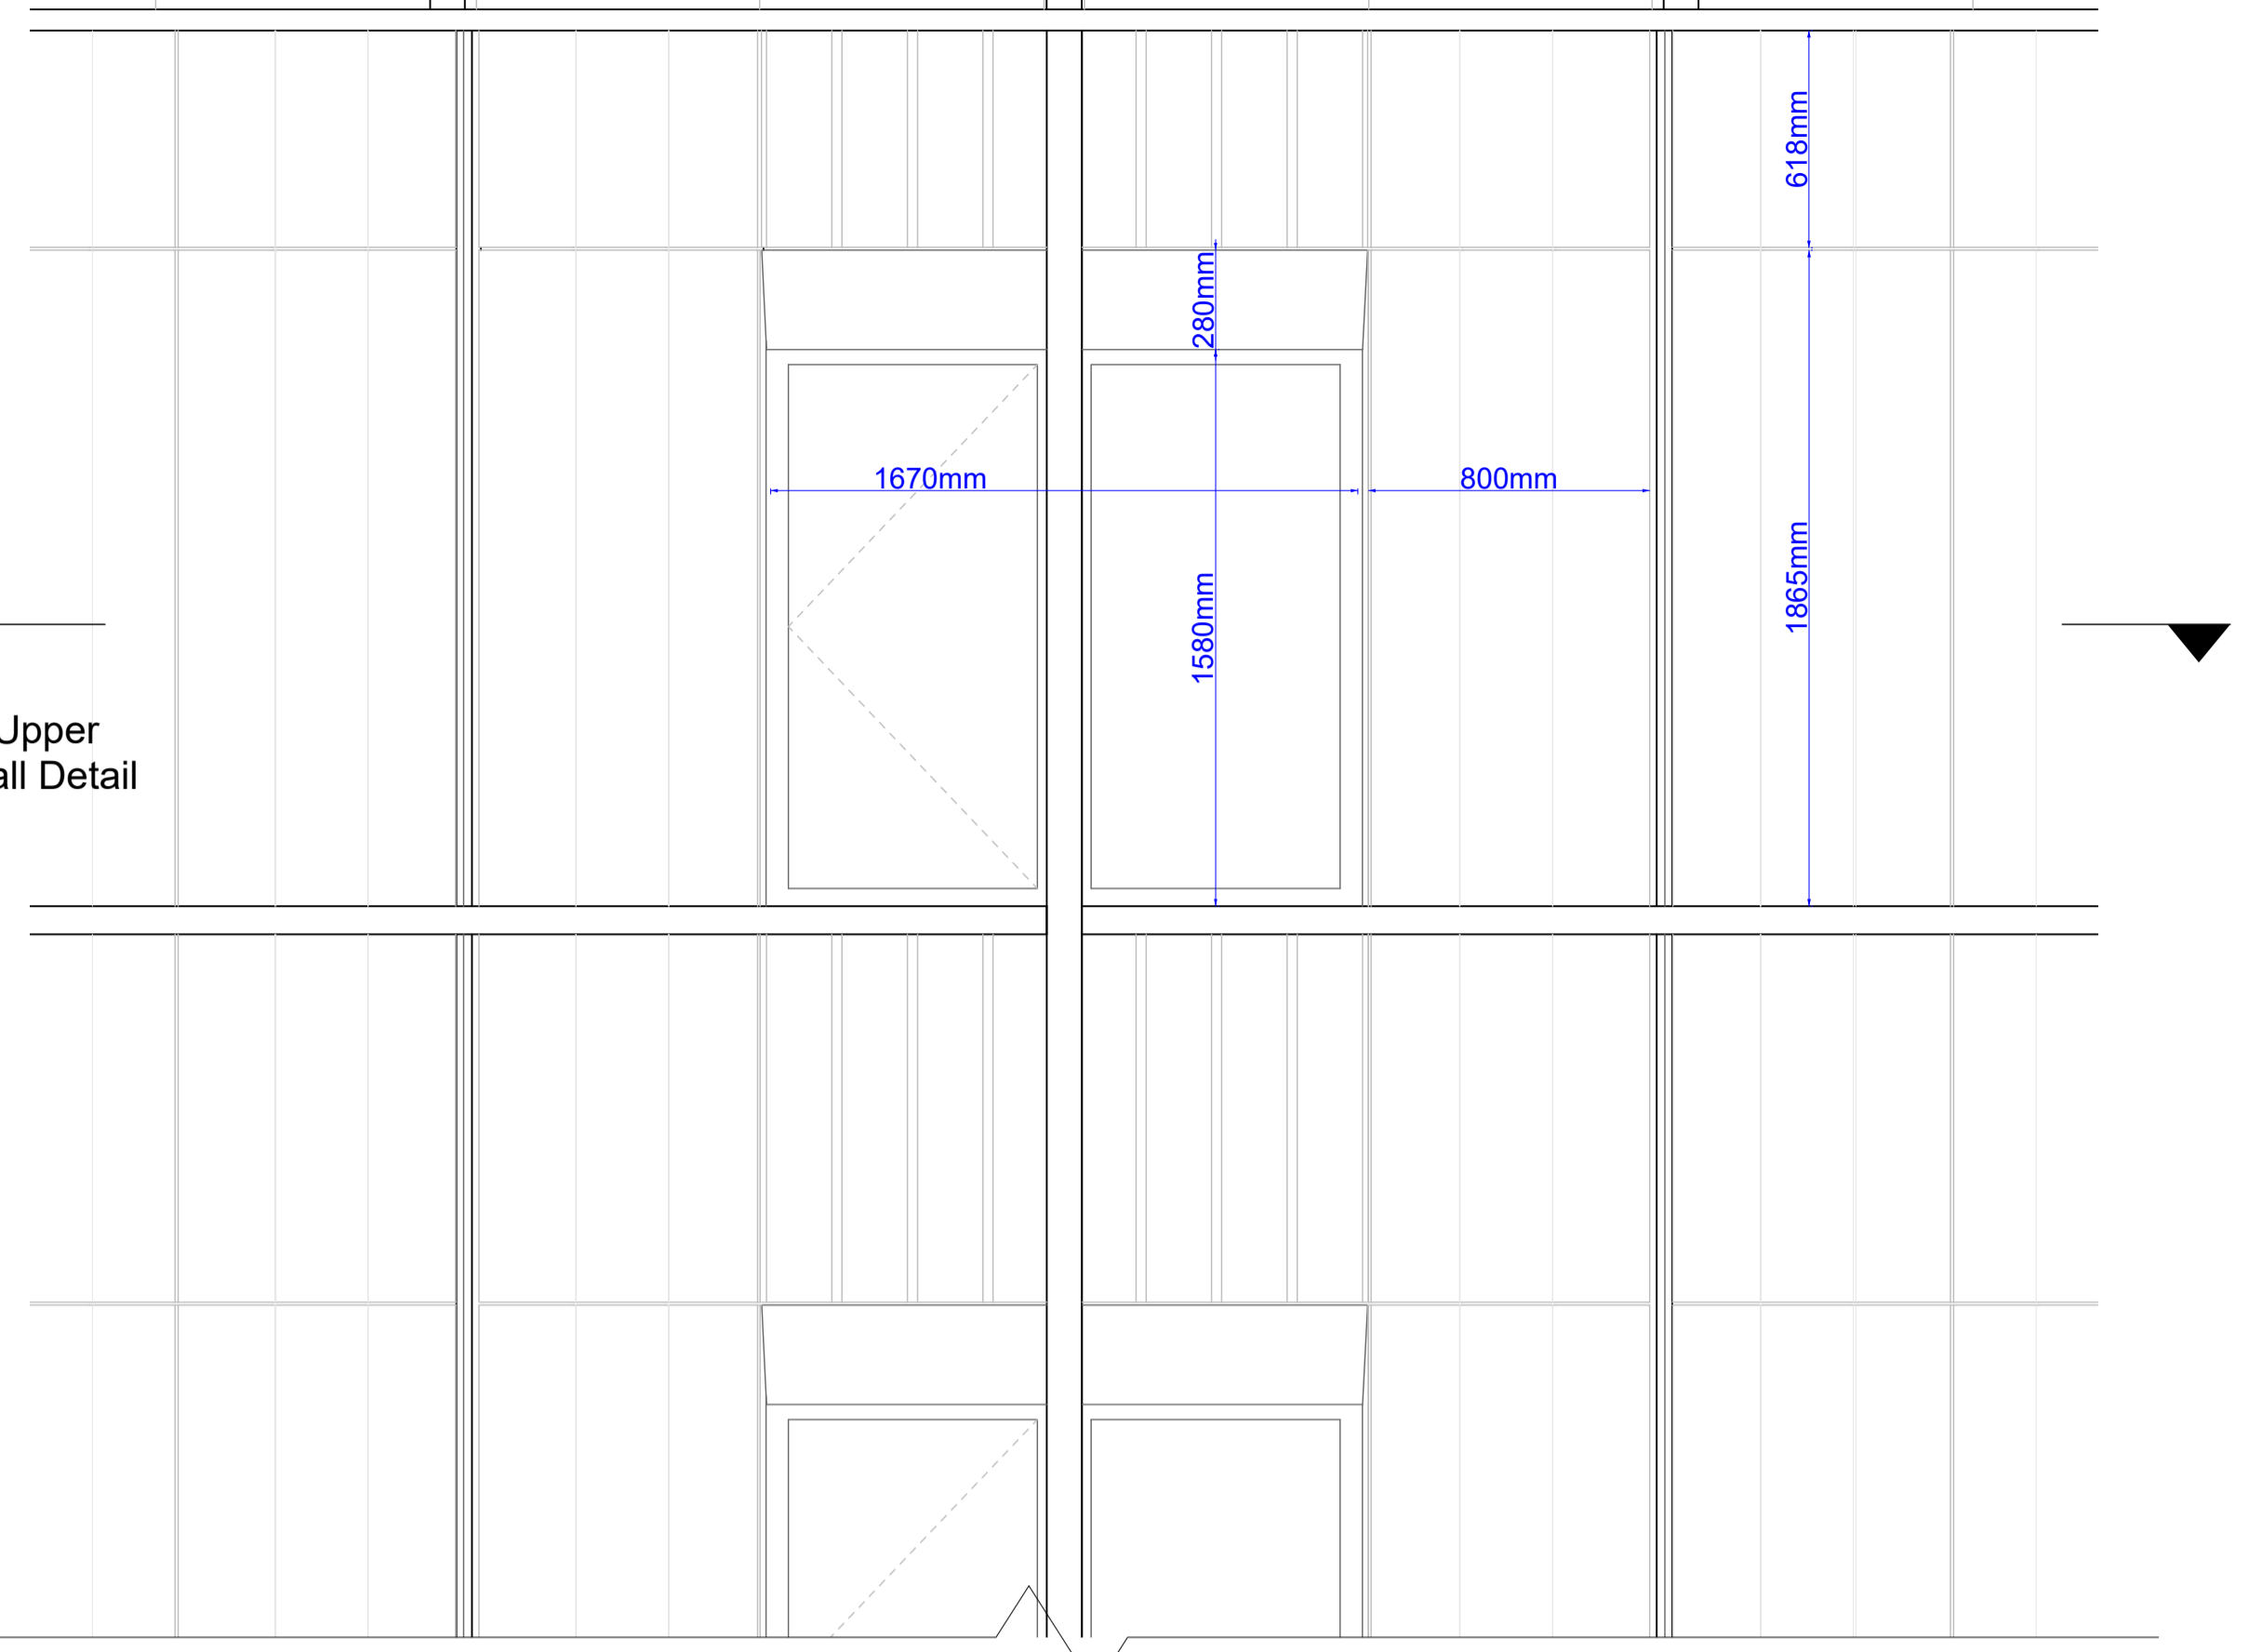


Typical Upper Floor Wall Detail

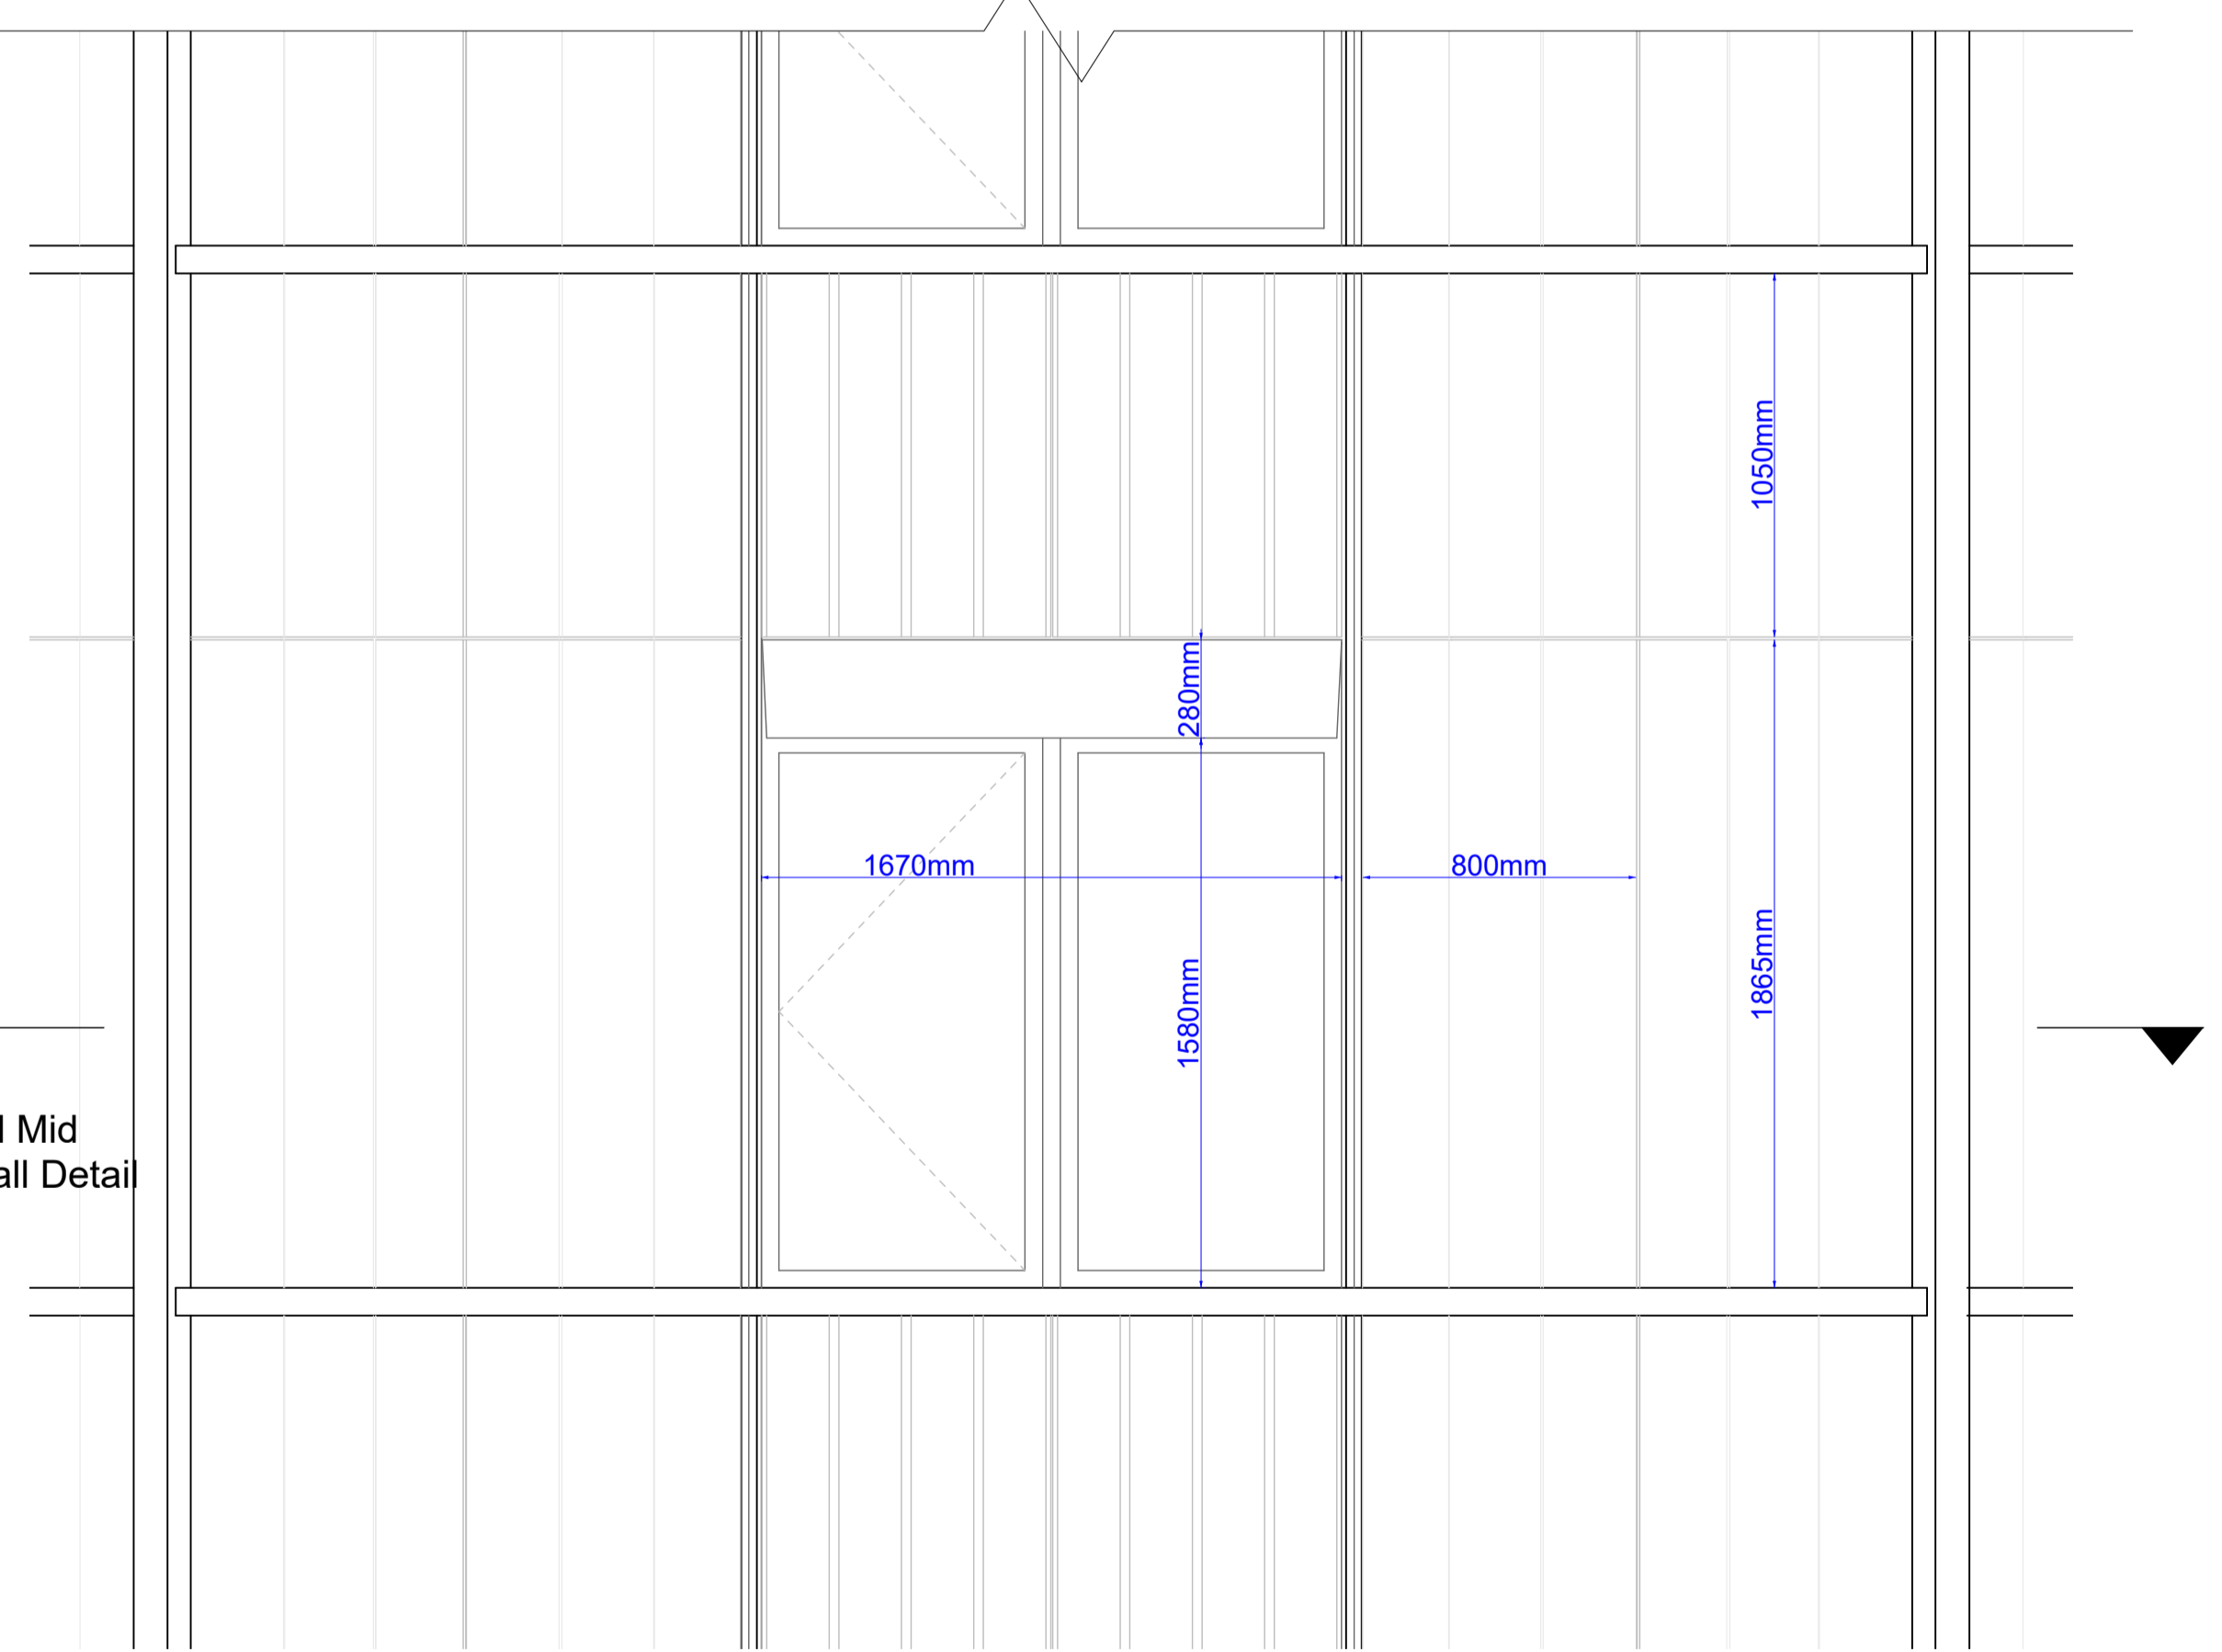

Typical Mid Floor Wall Detail


Detail Elevation 1:20 at A1

PBSA East Drum Bay Study Detail

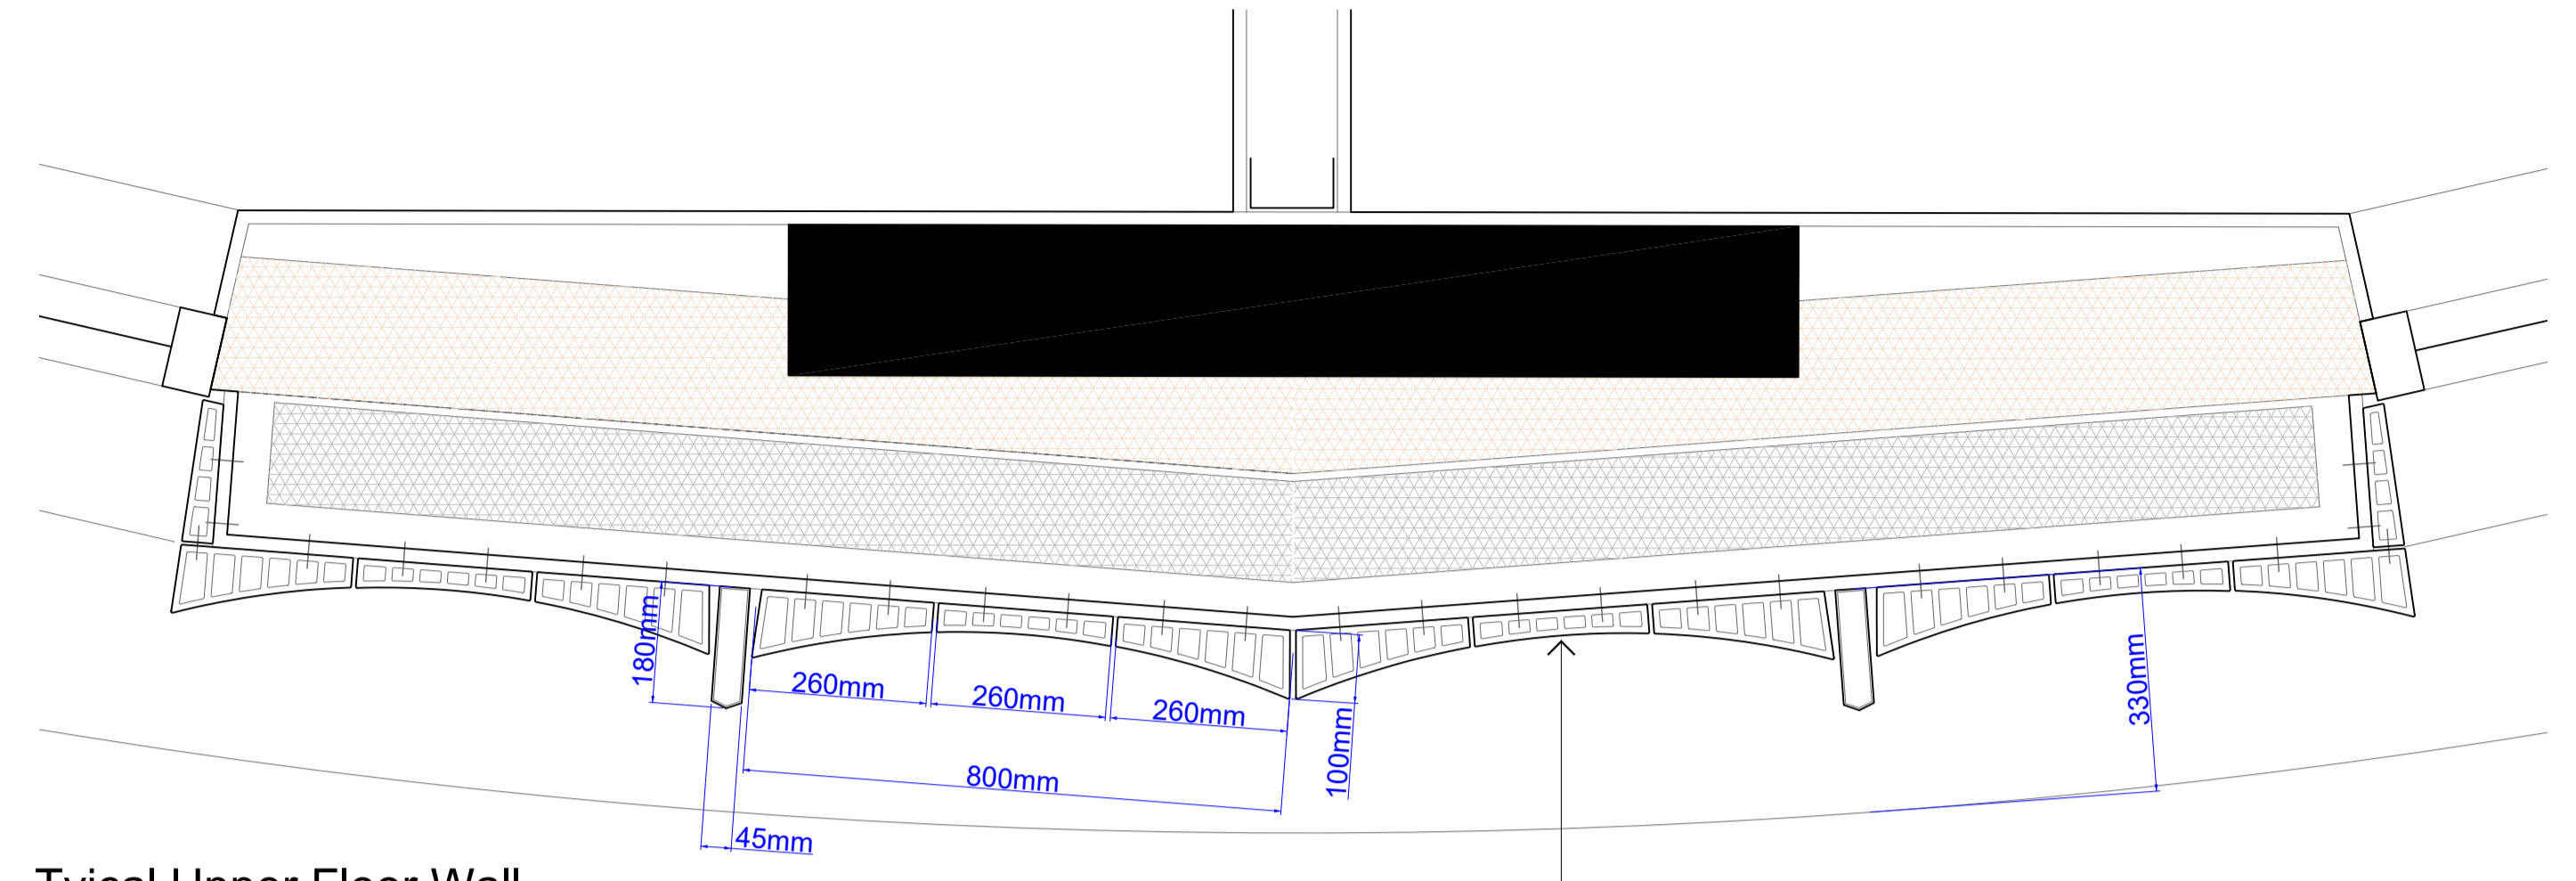

Typical Upper Floor Wall Design Intent Plan 1:10 at A1

- Metsec SFS Infill Wall.
- 3mm gypsum plaster skim
- 12.5mm plasterboard
- Vapour Barrier
- 200mm depth metsec steel framing
- 200mm Rockwool Flexi insulation
- 10mm cement-bonded particleboard
- 120mm Rockwool Rainscreen Duo insulation
- Breather membrane
- 50mm – galvanised steel framing
- 100mm – profiled terracotta panels

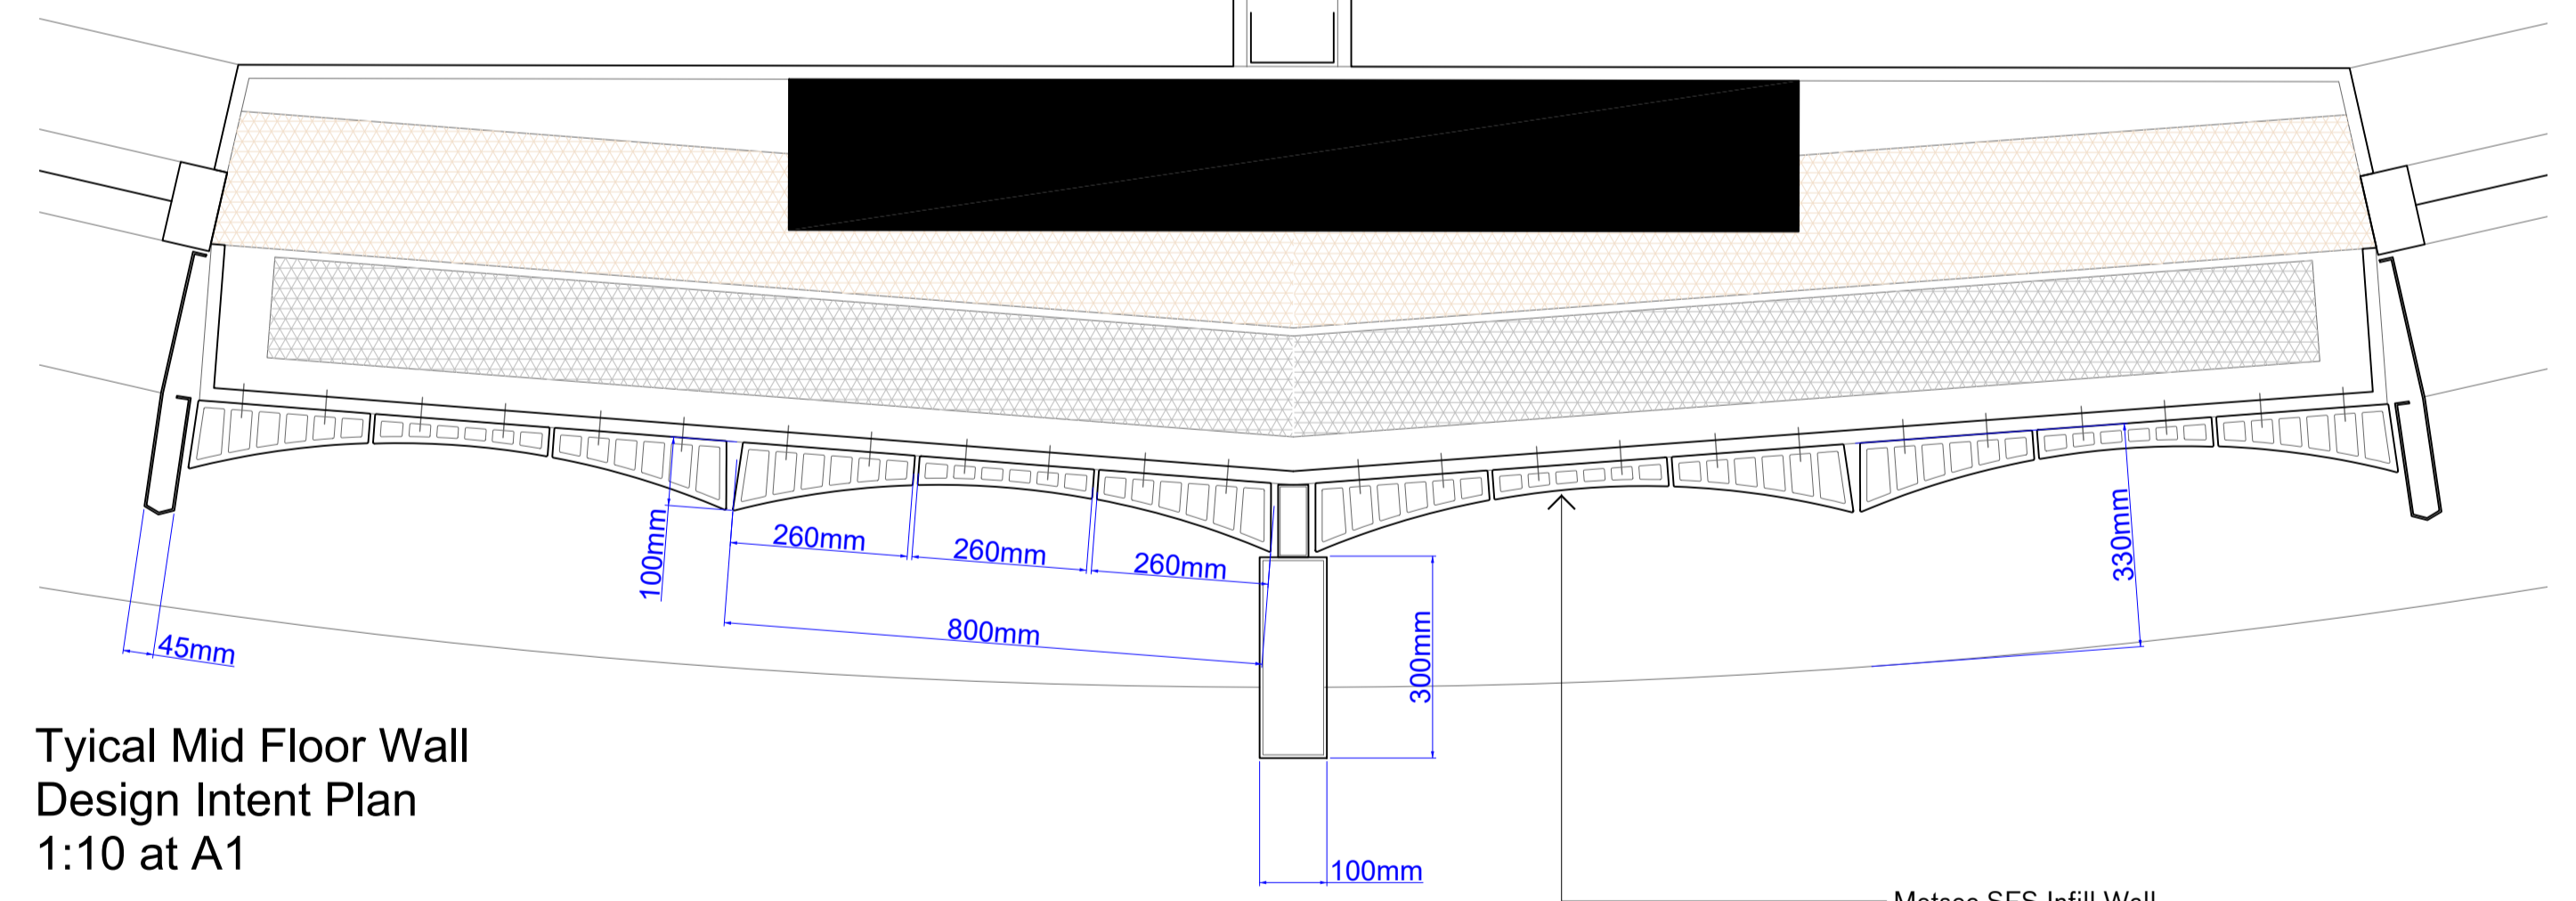

Typical Mid Floor Wall Design Intent Plan 1:10 at A1

- Metsec SFS Infill Wall.
- 3mm gypsum plaster skim
- 12.5mm plasterboard
- Vapour Barrier
- 200mm depth metsec steel framing
- 200mm Rockwool Flexi insulation
- 10mm cement-bonded particleboard
- 120mm Rockwool Rainscreen Duo insulation
- Breather membrane
- 50mm – galvanised steel framing
- 100mm – profiled terracotta panels