



Selectaglaze Ltd, Alban Park, Hatfield Road, St Albans AL4 0JJ
Phone 01727 837271 Fax 01727 844053

- [Selectaglaze »](#)
- [Benefits »](#)
- [Guidance »](#)
- [Products »](#)
- [Gallery](#)
- [Sectors »](#)
- [Heritage Buildings »](#)
- [Contact us](#)
- [Quicklink »](#)

Series Vertical sliding 20

Guidance

A slim sash system suited to the treatment of traditional double hung sash windows. When installing this unit a minimum gap between the windows of 75mm is recommended to facilitate cleaning.

Product Features

- Adjustable spiral spring balances fully support a sash weight up to 20Kg in all positions
- Slim unobtrusive sight lines
- Recessed finger lift allows contra-sliding and facilitates cleaning
- Integral finger pull to upper sash
- Design permits both sashes to be operated independently
- Twin brush seals ensure high sealing efficiency
- Concealed fixings provide clean appearance

Options


Glazing

- 4mm to 6.8mm

Frame

- Curved heads to a minimum radius of 450mm
- Trickle ventilator within extended timber sub frame.
- Colour matched mullion/transom section allows frames to be linked

Ironmongery

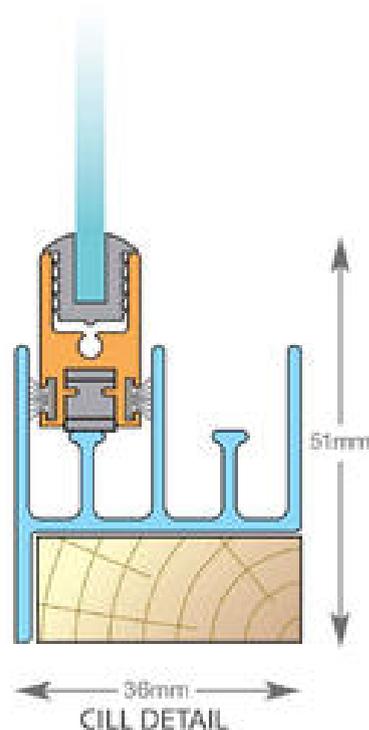

- Fitch catch lock (white or silver)
- Yale 8K 100 lock (white)
- Plunge lock (box interlock stile only)

Size guidelines

(subject to glass thickness)

- Maximum sash size 1500mm x 1300mm
(allows overall frame height of 3000mm)
- Minimum sash size 500mm x 400mm
- Sash height to width ratio should not normally exceed 1:3



© Selectaglaze 2014. E&OE - Selectaglaze reserves the right to amend specifications and designs at any time without notice. All information is provided in good faith but the company will not accept responsibility for any errors or omissions. Text and illustrations are copyright Selectaglaze. The Selectaglaze logo is a trade mark of Selectaglaze Limited, Alban Park, Hatfield Road, St Albans AL4 0JJ

We use cookies in order to improve the usability of this site. Please click here to see our [Cookie policy](#)

