


# Cam Action Door Controls (surface mounted)

## Cam Action - Concealed



- IC001-A Concealed cam action door closer EN 2-4 minimum door thickness of 40mm required. Adjustable closing force, latch action. For doors up to 1100mm internal only.
- IC001-B Concealed cam action door closer EN 3-6 minimum door thickness of 50mm required. As detailed above for doors up to 1400mm internal only.
- IC001-C Concealed cam action door closer EN2-4 for double action applications.
- IC001-MHO Mechanical hold open device (not for fire doors).
- IC001-EMF Electro mechanical hold open arm assembly.
- Size 1 FD30 Intumescent Fire Seal pack for EN 2-4.
- Size 2 FD60 Intumescent Fire Seal pack for EN 2-4.
- Size 3 FD30 Intumescent Fire Seal pack for EN 3-6.
- Size 4 FD60 Intumescent Fire Seal pack for EN 3-6.

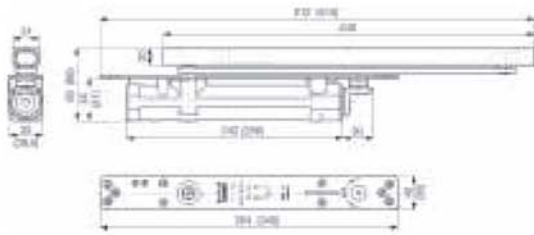

### Finishes

Silver, stainless steel, polished brass and polished chrome.  
Any RAL Colour.



### Options



### Standards

BS EN 1154.  
BS EN 1155.  
Certifire.  
CE Marked.

These door controls form part of a full system covering many applications. For more specific detail please contact us.