

### R&D technology adaptation

#### Reduction of carrier recombination loss

-Preserving as much of the generated electricity as possible

-Realizing even higher voltage

#### Use resources effectively

-By cutting the wafer almost round the HD cell produces less waste of material  
-Compact module size but highest electric generation

### HD cell design

**18.0%\***  
**180 W/m<sup>2</sup>**



### Anti- reflection glass

#### Reduction of optical loss

-Enabling as much incoming sunlight as possible to reach the electrical generating layer (crystalline silicon)  
-Realizing even higher current

\* For HIT-H250E01

## HIT cell technology

The SANYO HIT (Heterojunction with Intrinsic Thin layer) solar cell is made of a thin mono crystalline silicon wafer surrounded by ultra-thin amorphous silicon layers. This product provides the industry's leading performance and value using state-of-the-art manufacturing techniques.

## Special Features

### More Clean Energy

HIT can generate more clean Energy than other conventional crystalline solar cells.


## Environmentally-Friendly Solar Cell

SANYO HIT solar modules are 100% emission free, have no moving parts and produce no noise. The dimensions of the HIT modules allow space-saving installation and achievement of maximum output power possible on given roof area.


## High performance at high temperatures

Even at high temperatures, the HIT cell can maintain higher efficiency than a conventional crystalline silicon solar cell.

### HIT<sup>®</sup> HD Solar Cell

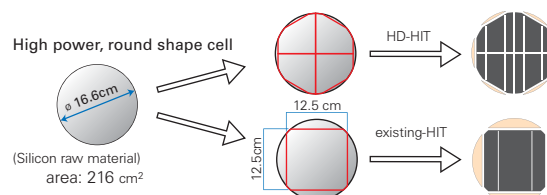

### Changes in generated power daytime

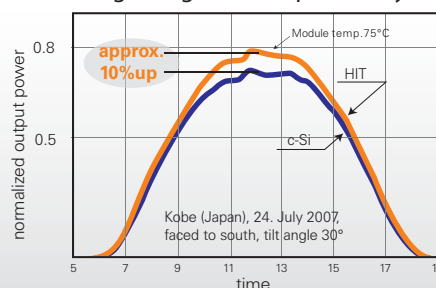

The HIT cell and module have very high conversion efficiency in mass production.

**HIT<sup>®</sup> HD**  
Photovoltaic Module

HIT is a registered trademark of SANYO Electric Co., Ltd. The name "HIT" comes from "Heterojunction with intrinsic Thin-layer" which is an original technology of SANYO Electric Co., Ltd.

Model	Cell Efficiency	Module Efficiency	Output / m <sup>2</sup>
HIT-H250E01	20.8%	18.0%	180 W/m <sup>2</sup>
HIT-H245E01	20.4%	17.7%	177 W/m <sup>2</sup>

### Electrical data (at STC)

Models HIT-HxxxE01

	250	245
Maximum power (Pmax) [W]	250	245
Max. power voltage (Vmp) [V]	34.9	34.4
Max. power current (Imp) [A]	7.18	7.14
Open circuit voltage (Voc) [V]	43.1	42.7
Short circuit current (Isc) [A]	7.74	7.73
Maximum over current rating [A]	15	
Output power tolerance [%]	+10/-5*	
Maximum system voltage [V]	1000	

Note: Standard Test Conditions: Air mass 1.5, Irradiance = 1000W/m<sup>2</sup>, cell temperature = 25°C

\* All modules measured by SANYO facility have output with positive tolerance

Temperature characteristics	250	245
Temperature (NOCT) [°C]	46.0	46.0
Temperature coefficient of Pmax [%/°C]	-0.30	-0.30
Temperature coefficient of Voc [V/°C]	-0.108	-0.107
Temperature coefficient of Isc [mA/°C]	2.32	2.32


At NOCT	250	245
Maximum power (Pmax) [W]	188.9	185.4
Max. power voltage (Vmp) [V]	32.8	32.4
Max. power current (Imp) [A]	5.76	5.73
Open circuit voltage (Voc) [V]	40.5	40.1
Short circuit current (Isc) [A]	6.23	6.23

Note: Nominal Operating Cell Temperature : Air mass 1.5 spectrum, Irradiance = 800W/m<sup>2</sup>, Air temperature = 20°C, wind speed 1 m/s


At low irradiance	250	245
Maximum power (Pmax) [W]	48.8	47.7
Max. power voltage (Vmp) [V]	34.1	33.6
Max. power current (Imp) [A]	1.43	1.43
Open circuit voltage (Voc) [V]	40.1	39.7
Short circuit current (Isc) [A]	1.55	1.55

Note: Low irradiance: Air mass 1.5 spectrum, Irradiance = 200W/m<sup>2</sup>, cell temperature = 25°C

### Dependence on irradiance

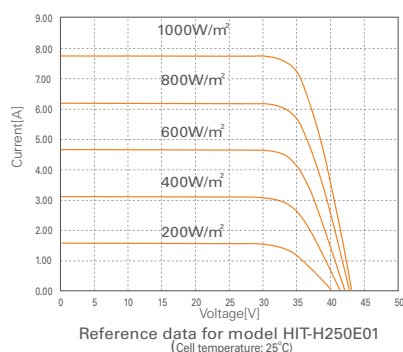

### Dimensions and weight

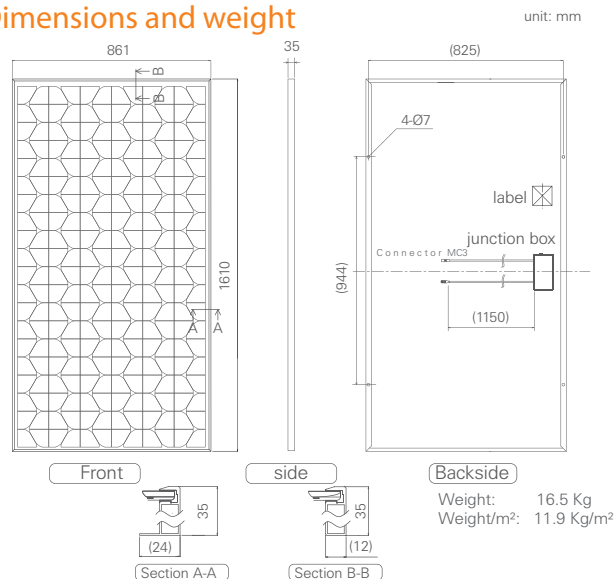

### Guarantee

Power output: 10 years (90% of Pmin) 25 years (80% of Pmin)  
Product workmanship: 10 years  
(Based on guarantee documents)

### Materials

Cell material: Honeycomb Design HIT cells  
Glass material: AR coated tempered glass  
Frame materials: Black anodized aluminium  
Connector type: MC3

### Certificates



• Safety tested,  
IEC 61730  
• Periodic inspection

IEC 61730  
IEC 61215



### Member of



Certificate No. MCS PV0034  
Photovoltaic System



Please consult your local dealer for more information.

**CAUTION!** Please read the installation manual carefully before using the products.

Due to our policy of continual improvement the products covered by this brochure may be changed without notice.

**SANYO Component Europe GmbH**  
Solar Division

Stahlgruberring 4  
81829 Munich, Germany  
Tel. +49-(0)89-460095-0  
Fax. +49-(0)89-460095-170  
<http://www.sanyo-solar.eu/en>  
email: [info.solar@sanyo-solar.eu](mailto:info.solar@sanyo-solar.eu)



**SANYO Electric Co., Ltd.**  
Solar Division  
<http://www.sanyo.com/solar/>