


# PURY-P600YSJM-A Standard R2 Series 24hp Outdoor Unit

## R410A Heat Recovery

Many buildings require cooling in some areas and heating in others - even in adjacent rooms. The outstanding City Multi R2 system meets this requirement by distributing surplus heat from cooling operations (and vice versa) to rooms where it is needed. This efficiency can result in energy savings of up to 30% over conventional systems.



## Model Info



Hover your mouse over the red icons below to view a description of each feature:



## PURY-P600YSJM-A

Capacity (kW):	
Heating (Nominal)	76.5
Cooling (Nominal)	69.0
Heating (UK)	69.2
Cooling (UK)	63.5
Power Input (kW) Heating (Nominal)	19.07
Power Input (kW) Cooling (Nominal)	19.65
Power Input (kW) Heating (UK)	21.74
Power Input (kW) Cooling (UK)	12.38
Max No. of Connectable Indoor Units	50
Airflow (m3/min)	185 /185
Noise (dBA)	62
Width - mm	920 + 920
Depth - mm	760
Height - mm	1710
Weight - kg	245 + 245
Electrical Supply	380-415v, 50Hz
Phase	3
Mains Cable No. Cores	4 + earth
Starting Current (A)	8
Running Current (A) - Heating	29.4
Running Current (A) - Cooling	30.3


## Piping Restrictions

Total Piping Length (m)	800
Furthest Piping Length (m)	165

## Dimensions

PURY-P600YSJM-A (Click to enlarge).

[Print]

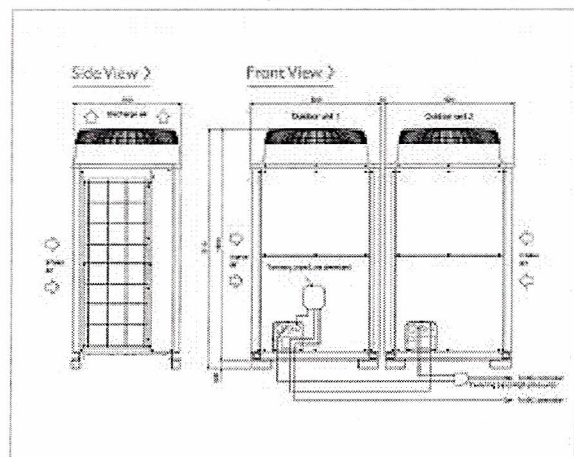


# PURY-P500YSJM-A Standard R2 Series 20hp Outdoor Unit

## R410A Heat Recovery

Many buildings require cooling in some areas and heating in others - even in adjacent rooms. The outstanding City Multi R2 system meets this requirement by distributing surplus heat from cooling operations (and vice versa) to rooms where it is needed. This efficiency can result in energy savings of up to 30% over conventional systems.

## Model Info



Hover your mouse over the red icons below to view a description of each feature:



## PURY-P500YSJM-A

Capacity (kW):	
Heating (Nominal)	63.0
Cooling (Nominal)	56.0
Heating (UK)	57.0
Cooling (UK)	51.5
Power Input (kW) Heating (Nominal)	15.1
Power Input (kW) Cooling (Nominal)	14.85
Power Input (kW) Heating (UK)	17.21
Power Input (kW) Cooling (UK)	9.36
Max No. of Connectable Indoor Units	50
Airflow (m <sup>3</sup> /min)	185 /185
Noise (dBA)	60
Width - mm	920 + 920
Depth - mm	760
Height - mm	1710
Weight - kg	240 + 240
Electrical Supply	380-415v, 50Hz
Phase	3
Mains Cable No. Cores	4 + earth
Starting Current (A)	8
Running Current (A) - Heating	23.3
Running Current (A) - Cooling	22.9


## Piping Restrictions

Total Piping Length (m)	750
Furthest Piping Length (m)	165

## Dimensions

PURY-P500YSJM-A (Click to enlarge).

[Print]

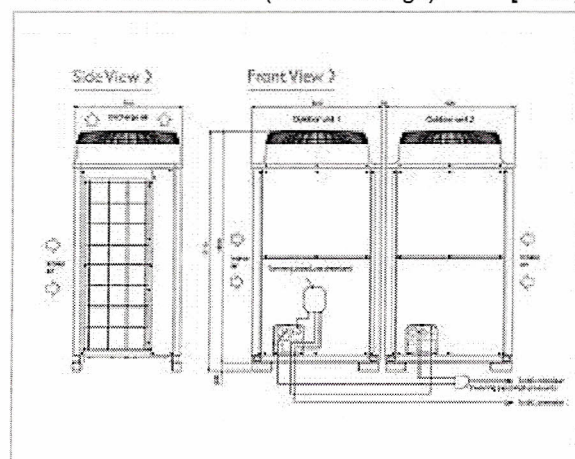


# PURY-P250YJM-A Standard R2 Series 10hp Outdoor Unit

## R410A Heat Recovery

Many buildings require cooling in some areas and heating in others - even in adjacent rooms. The outstanding City Multi R2 system meets this requirement by distributing surplus heat from cooling operations (and vice versa) to rooms where it is needed. This efficiency can result in energy savings of up to 30% over conventional systems.

## Model Info



Hover your mouse over the red icons below to view a description of each feature:




## PURY-P250YJM-A

Capacity (kW):	
Heating (Nominal)	31.5
Cooling (Nominal)	28.0
Heating (UK)	31.5
Cooling (UK)	26.6
Power Input (kW) Heating (Nominal)	7.32
Power Input (kW) Cooling (Nominal)	7.05
Power Input (kW) Heating (UK)	9.22
Power Input (kW) Cooling (UK)	4.05
Max No. of Connectable Indoor Units	25
Airflow (m3/min)	185
Noise (dBA)	57
Width - mm	920
Depth - mm	760
Height - mm	1710
Weight - kg	240
Electrical Supply	380-415v, 50Hz
Phase	3
Mains Cable No. Cores	4 + earth
Starting Current (A)	8
Running Current (A) - Heating	11.3
Running Current (A) - Cooling	10.8
Fuse Rating (BS88) - HRC (A)	20

## Dimensions

PURY-P200YJM-A (Click to enlarge).

[Print]

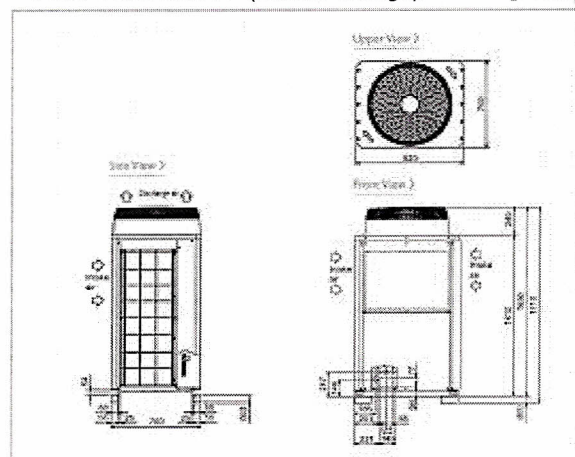

## Piping Restrictions