

Gravel to landscape architects specification

Existing Sub-base

Geotextile


Formation

GRAVEL - Trees

Pavers to Architects specifications 30mm of sand bedding 150mm sub-base granular Type 1 material Terram 1000 Formation

on existing

PAVING - FOOTPATH

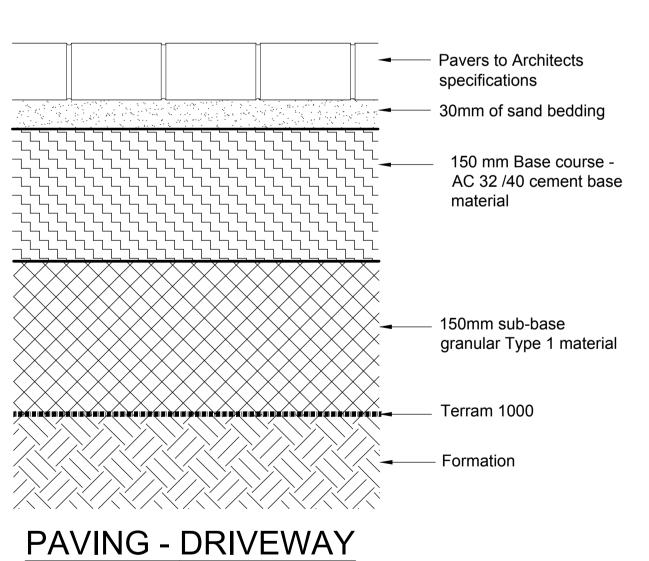

GENERAL NOTES

- 1. All material is to be non frost susceptible.
- 2. Surface course, binder course and base course in accordance with BS EN 13108.
- 3. Sub-base material in accordance with the Specification for Highway Works, Clause 801.
- Road formation to be checked for soft spots. Soft spots to be removed and replaced with Type 1 material or Type 6F2 capping material.
- 5. Laying course for concrete pavers to be checked with manufacturers guidelines.

CONSTRUCTION ISSUE

Notes:

Health & Safety

 This Drawing is to be read in conjunction with all relevant Architect's Engineer's and specialists' drawings and specifications.

2. Do not scale from this drawing in either paper or

digital form. Use written dimensions only. To check drawing has been printed to the intended scale this bar should be 50mm long @ A1 or 25mm long @ A3.

All specific drawing notes are to be read in conjunction with the project "Information Pack" and "Site Rules".

C1	16-04-13	SG	SG	Issued for Construction
Т3	17-09-12	SG	SG	Issued for Tender
T2	24-08-12	SG	SG	Revised as clouded
T1	09-08-12	SG	SG	Issued for Tender
Rev	Date	Drawn	Eng	Amendment

CORAM CAMPUS BLOOMSBURY PHASE 1

DRAINAGE CONSTRUCTION
DETAILS
SHEET 2 OF 2

Drawn SG	Eng DL
Diawii 00	
Scales 1:20 at A1	
Drawing No	Rev
20936-D22	C1

Consulting Engineers
30 Newman Street London W1T 1LT
T 020 7631 5128 F 020 7462 1390
E name@pricemyers.com www.pricemyers.com