No. 21 No. 20



1:50 0 1 2 3 4 5m REV. ISSUED DESCRIPTION DRAWN CHECKED
L2 26.07.24 General note updated.

RE RE

# With exception of works to parapet gulleys, tile replacement, and cast iron air bricks, all external works have already secured Full Planning & Listed Building Consent under application refs. 2023/0223/P and 2023/0878/L. They have

been detailed on the plans for completeness.

All external fabric repairs have already secured Listed Building Consent

Floor Finish Type 01 - New Vinyl Plank Herringbone Floor
New vinyl plank herringbone floor installed in herringbone pattern with
perimeter boarder. Existing floor boards to be patched and overlaid with
6mm flooring grade plywood followed by a minimum 3mm layer of fibre
reinforced leveling compound.

Floor Finish Type 02

New carpet. New boards / existing floor boards to be patched and overlaid with 6mm flooring grade plywood below.

Floor Finish Type 03
New coir matting within recessed mat well.

Floor Finish Type 04
Existing stair treads to be sanded and varnished. Risers and string to be redecorated. Floor Type 01 to landings and lobbies within stair well.

Floor Finish Type 06
New solid surface fireplace hearth.

Floor Finish Type 07

New vinyl safety flooring.

Floor Finish Type 08
New external composite decking.

Floor Finish Type 11
New anti-static flooring to coms rooms.

Floor Finish Type 09
New anti slip painted floor finish.

Floor Finish Type 10 - Existing Hearth
Existing hearth to be retained and made good where appropriate

## WALL FINISHES KEY:

Wall Finish Type 01 - Painted Finish Generally New and existing plastered walls to be decorated with water based emulsion paint.

Wall Finish Type 02 - Painted finish to Kitchens, WCs and Shower Areas New and existing plastered walls to be decorated with water based eggshell paint.

Wall Finish Type 03 - New tiles to wet areas (Half wall)
New tilling installed vertically above tiled skirting up to approximately
1190mm.

Wall Finish Type 03 - New tiles to wet areas (Full wall) - New tilling installed vertically above tiled skirting

Wall Finish Type 04 - Painted Finish Generally with Lining Paper New and existing plastered walls with new lining paper to be decorated with water based emulsion paint.

Wall Finish Type 05 - Painted finish to Kitchens with Lining Paper New and existing plastered walls with new lining paper to be decorated with water based eggshell paint.

Wall Finish Type 06 - Painted Finish to Internal Wood Linings New and existing woodwork decorated with water based eggshell paint.

Wall Finish Type 07 - Painted Finish to Render
New and existing rendered finishes decorated with masonry paint.

#### CEILING FINISH KEY:

CF-01 Painted Finish Generally
Ceiling to be decorated with emulsion paint.

**C**F-02 Painted Finish to Wet Areas Ceilings to be decorated with eggshell paint.

## CEILING ROSES:

## **D**ecorated with emulsion paint.

### CORNICES:

**D**ecorated with emulsion paint.

#### SKIRTING KEY

SK-01 Existing Skirting
Existing skirting retained, prepared and redecorated with eggshell paint. New or damaged skirting to be replaced to match existing in

size, material and profile.

SK-02 New Skirting to Ground and First Floors

New timber skirting to match existing on floors. To be decorated with

eggshell paint.

SK-03

New Skirting to Lower Ground and Upper Floors
New timber skirting to match original on floors. To be decorated with

eggshell paint. **S**K-04 New Tiled Skirting to Wet Areas


New tiled skirting to match wall tilling.

SK-05 New Coved Skirting to Cleaner's Cupboard & Plant

Vinyl flooring to be used as coved skirting

#### **D**ADO RAIL KEY

**D**-01 Existing Dado Rail
Existing dado rail retained and re-decorated with eggshell paint. Any damaged or missing section replaced to match existing in both material and appearance.

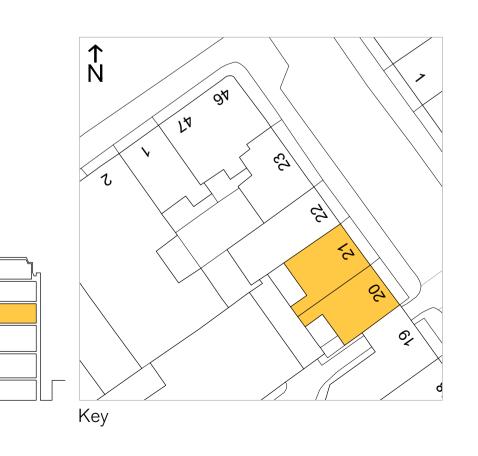

PROJECT DESCRIPTION DATE SCALE AT A1 HOLBORN LINKS 20-21 SP PROPOSED SECOND JUNE '21 1:50

PROJECT 5 FLOOR FINISHES PLAN

STATUS
PLANNING

CLIENT DRAWN CHECKED
EDR

COMUNICATION CHECKED
CW RE

21.865

DRAWING NO
PL.1603

REV
L2

