

With exception of works to parapet gulleys, tile replacement, and cast iron air bricks, all external works have already secured Full Planning & Listed Building Consent under application refs. 2023/0224/P and 2023/0882/L. They have been detailed on the plans for completeness.

All external fabric repairs have already secured Listed Building Consent 2022/1811/L.



FLOOR FINISHES KEY:

- Floor Finish Type 01 - New Vinyl Plank Herringbone Floor
New vinyl plank herringbone floor installed in herringbone pattern with perimeter boarder. Existing floor boards to be patched and overlaid with 6mm flooring grade plywood followed by a minimum 3mm layer of fibre reinforced leveling compound.
- Floor Finish Type 02
As Type 01 above.
- Floor Finish Type 03
New coil matting within recessed mat well.
- Floor Finish Type 04
Existing stair treads to be sanded and varnished. Risers and string to be redecorated. Floor Type 01 to landings and lobbies within stair well.
- Floor Finish Type 06
New solid surface fireplace hearth.
- Floor Finish Type 07
New vinyl safety flooring.
- Floor Finish Type 08
New external composite decking.
- Floor Finish Type 09
New anti slip painted floor finish.
- Floor Finish Type 10 - Existing Hearth
Existing hearth to be retained and made good where appropriate.
- Floor Finish Type 11
New anti-static flooring to coms rooms.

WALL FINISHES KEY:

- Wall Finish Type 01 - Painted Finish Generally
New and existing plastered walls to be decorated with water based emulsion paint.
- Wall Finish Type 02 - Painted finish to Kitchens, WCs and Shower Areas
New and existing plastered walls to be decorated with water based eggshell paint.
- Wall Finish Type 03 - New tiles to wet areas (Half wall)
New tiling installed vertically above tied skirting up to approximately 1190mm.
- Wall Finish Type 03 - New tiles to wet areas (Full wall) -
New tiling installed vertically above tiled skirting
- Wall Finish Type 04 - Painted Finish Generally with Lining Paper
New and existing plastered walls with new lining paper to be decorated with water based emulsion paint.
- Wall Finish Type 05 - Painted finish to Kitchens with Lining Paper
New and existing plastered walls with new lining paper to be decorated with water based eggshell paint.
- Wall Finish Type 06 - Painted Finish to Internal Wood Linings
New and existing woodwork decorated with water based eggshell paint.
- Wall Finish Type 07 - Painted Finish to Render
New and existing rendered finishes decorated with masonry paint.

CEILING FINISH KEY:

- CF-01 Painted Finish Generally
Ceiling to be decorated with emulsion paint.
- CF-02 Painted Finish to Wet Areas
Ceilings to be decorated with eggshell paint.

CEILING ROSES:

- Decorated with emulsion paint.

CORNICES:



- Decorated with emulsion paint.

SKIRTING KEY

- SK-01 Existing Skirting
Existing skirting retained, prepared and redecorated with eggshell paint. New or damaged skirting to be replaced to match existing in size, material and profile.
- SK-02 New Skirting to Ground and First Floors
New timber skirting to match existing on floors. To be decorated with eggshell paint.
- SK-03 New Skirting to Lower Ground and Upper Floors
New timber skirting to match original on floors. To be decorated with eggshell paint.
- SK-04 New Tiled Skirting to Wet Areas
New tiled skirting to match wall tiling.
- SK-05 New Coved Skirting to Cleaner's Cupboard & Plant
Vinyl flooring to be used as coved skirting

DADO RAIL KEY

- D-01 Existing Dado Rail
Existing dado rail retained and re-decorated with eggshell paint. Any damaged or missing section replaced to match existing in both material and appearance.

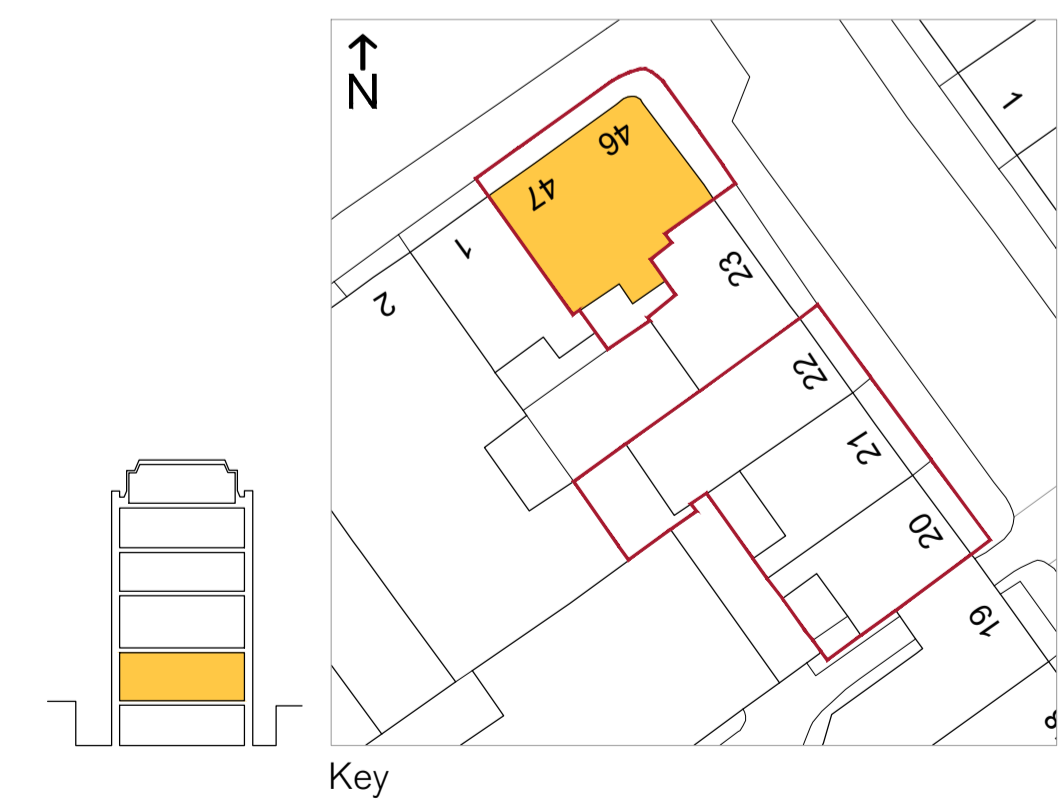

SPRATLEY & PARTNERS
7 CENTENARY BUSINESS PARK, STATION ROAD, HENLEY-ON-THAMES, OXFORDSHIRE RG9 1DS. 01491 411277
ISSUED ONLY FOR THE PURPOSE INDICATED. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL CONSULTANTS INFORMATION. ALL DIMENSIONS TO BE CHECKED ON SITE. THIS DRAWING IS COPYRIGHT.

REV.	ISSUED	DESCRIPTION	DRAWN	CHECKED
L2	26.07.24	Annotation updated.	RE	RE

PROJECT	DESCRIPTION	DATE	SCALE AT A1	JOB NO
HOLBORN LINKS PROJECT 5 20-22 SP & 46-47 BS	46-47 BS PROPOSED GROUND FLOOR FINISHES PLAN	JUNE '21	1:50	21.865

STATUS	DRAWING NO	CLIENT	DRAWN	CHECKED	REV
PLANNING	PL.1611	EDR	CW	RE	L2

S
& P