

Date	Rev	Comment	
			_
	-		_

CONSULTANTS	
Design Architect Wilmoth UK Ud 130 Oxford Gerdens London, UK W10 6NE	
Executive Architect ADAMSON ASSOCIATES (INTERNATIONAL) LIMITED 8th Floor, One Canada Square Canary What! London; UK E14 SAB	
AKT II Structural Engineer	
100 St John Street London	
UK, EC1M 4EH	

London, W1T 7PL						
Quantity Surveyor Gleeds	5					



**Lower Ground Floor Plan** 

Drawing no			Rev
Wuk_1440	_PL_51LG50_	Paving	-
Date	Date .	_ De	ate
Drawn B	Checked	BS A	pproved PL


### WILMOTTE UK Ltd





<u>∧</u> adamson



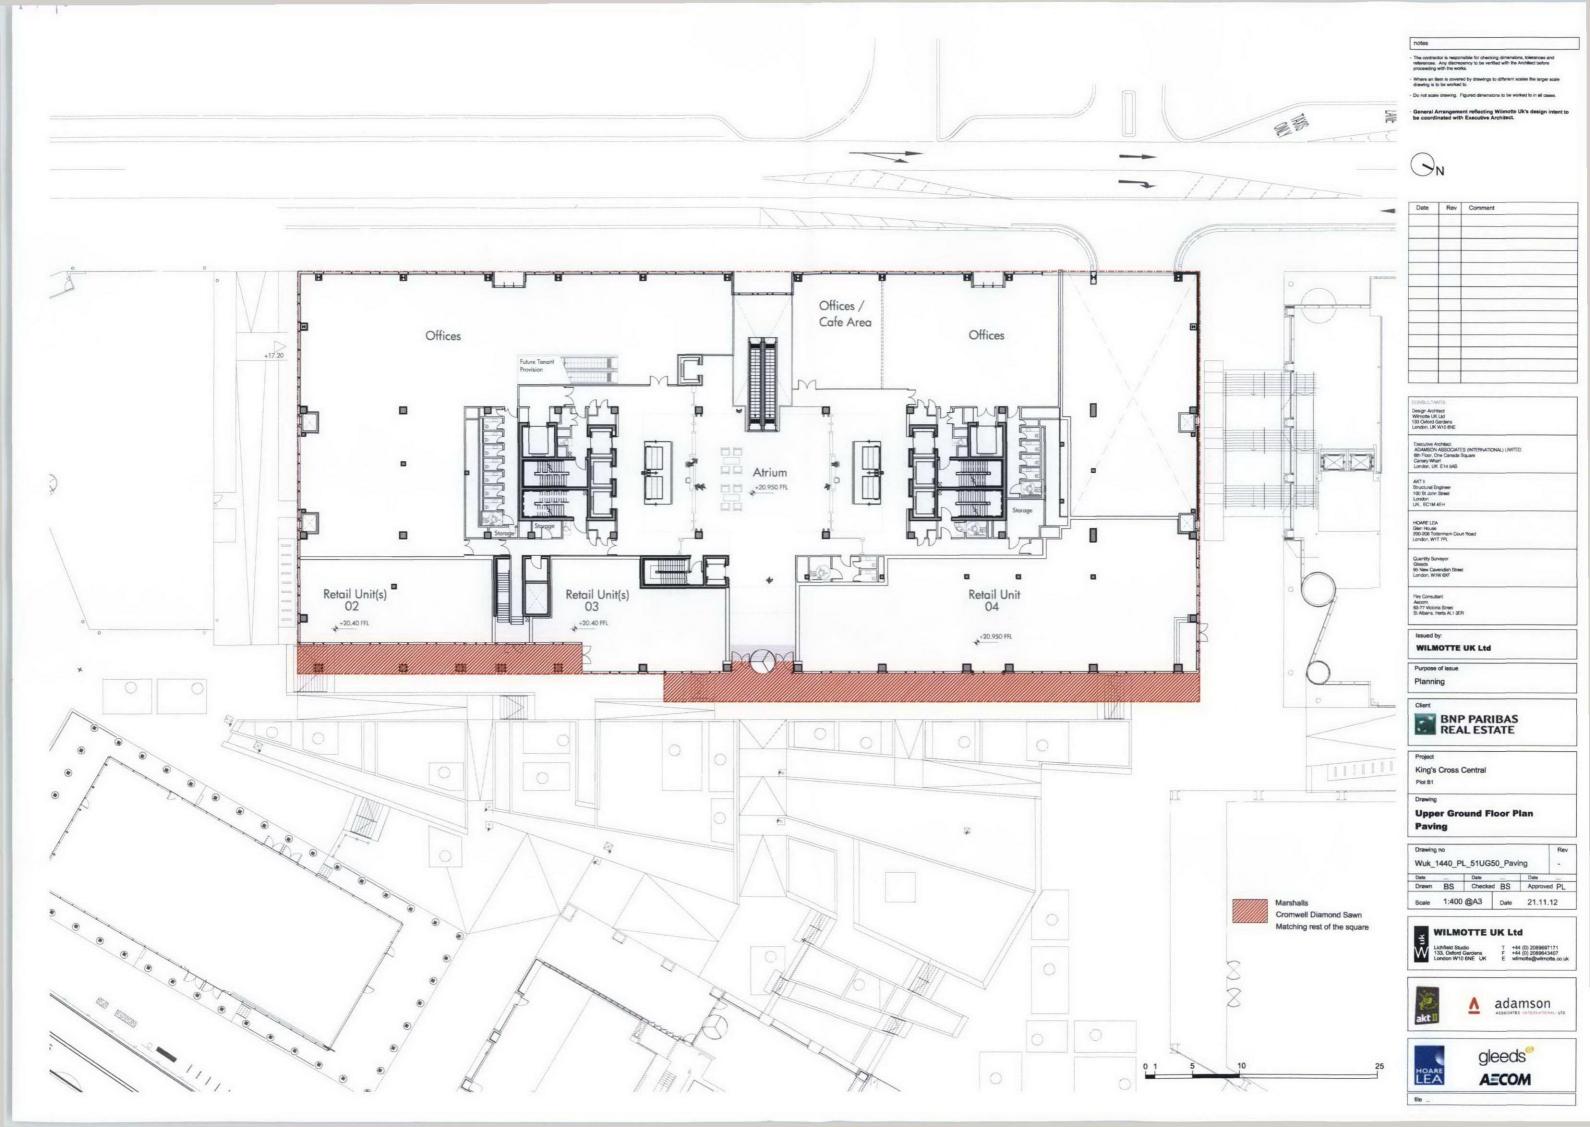



Sales Office: 08704 112266 Technical Support: 08704 113344 Manufacturing Standards: see page 19 PANS01

Q25 200 Q25 205 
 Paving
 page 54

 Paving
 page 74

 Kerb, Channel & Edging
 page 248

## Yorkstone

**Natural Stone Paving** 

Famed for its non-slip properties, Marshalls range of Yorkstone paving is used extensively in the most demanding of applications, adding character to both contemporary and traditional schemes.

Available in traditional Riven, Greenmoor Rustic or several Diamond Sawn options, Marshalls Yorkstone combines rich colouration with market leading performance and durability.

#### **Diamond Sawn Yorkstone**

- An attractive fine sawn texture.
- The pristine appearance and rich variety of colours of the different stone types makes Diamond Sawn Yorkstone one of the most popular natural stone choices.
- Available in Cromwell, Scoutmoor or Moselden please refer to page 44 for stone options.

#### Riven Yorkstone

- This unique Yorkstone paving has a hand Riven surface finish which is produced by splitting the stone along its natural beds by skilled masons.
- Hand worked quarry fettled edges to all sides.
- Buff to Brown in colour please refer to page 44 for images.

#### **Greenmoor Rustic**

- This Natural Yorkstone has a secondary processed finish which gives a subtle aged and weathered appearance.
- Provides an excellent alternative to reclaimed materials.
- Beautiful Blue Grey with Buff Ochre tones please refer to page 44 for images.

Marshalls range of Yorkstone paving is typically produced in a range of thicknesses to widths of 300, 450 and 600mm, normally specified to random lengths for an enhanced aesthetic quality and best use of this natural resource.

A wider variety of size options are available to suit most applications. Please contact our Natural Stone sales team for further details on the options available.

All Marshalls natural stone paving is sourced with regards to our obligations as a Corporate Member of the Ethical Trading Initiative (ETI).

Sales Office: 08704 112266 Technical Support: 08704 113344 Manufacturing Standards: see page 19


# Yorkstone

**Natural Stone Paving** 

Cromwell Diamond Sawn finish. Predominantly Buff with some veining









Scoutmoor Diamond Sawn finish. Varies from Blue Grey to Buff Brown










Moselden Diamond Sawn finish. Varies from Buff to Silver Blue Grey









Greenmoor Rustic Textured finish. Varies from Blue Grey to Buff Ochre tones









Yorkstone Riven Hand split finish. Predominantly Buff with some veining







