


MODEL		PUHZ-W50VHA	PUHZ-W85VHA2
Heating*1 A2/W35	Capacity (kW)	5.0 (1.5-5.0)	8.5 (2.6-8.5)
	COP	3.13	3.17
	Power Input (kW)	1.60	2.68
	Nominal flow rate (L/min)	14.3	25.8
Heating*2 A7/W35	Capacity (kW)	5.0 (1.5-5.0)	9.0 (2.7-9.0)
	COP	4.10	4.18
	Power Input (kW)	1.22	2.15
	Nominal flow rate (L/min)	14.3	25.8
Dimensions (mm)	Width	950	950
	Depth	330+30*	330+30*
	Height	740	943
Weight (kg)		64	77
Airflow (m ³ /min)		50	55
Nominal Sound Pressure Level (dBA)*3		45▲	48▲
Low Noise Mode (dBA) @ 7°C		40	42
Guaranteed Operating Range (Outdoor)		-15~+35°C	-20~+35°C
Electrical Supply		220-240v, 50Hz	220-240v, 50Hz
Phase		Single	Single
Running Current [Max] (A)		5.4 [13]	10.3 [23]
Fuse Rating (MCB sizes BS EN 60898) (A)		16	25


SCHEMATICS

PUHZ-W50VHA

Upper View

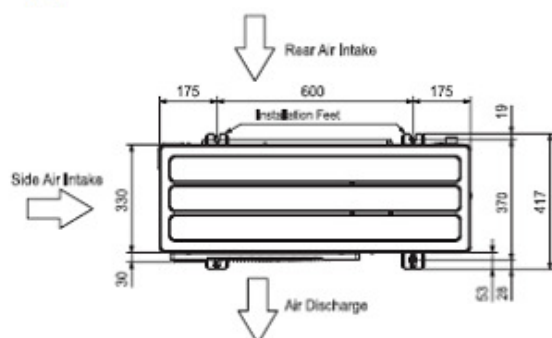


Front View

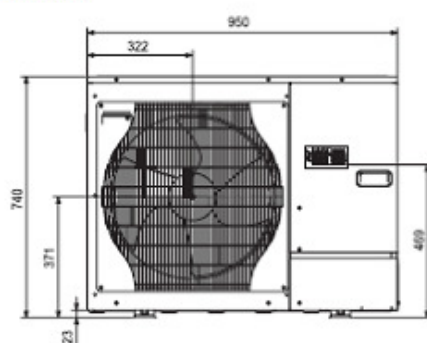

PUHZ-W85VHA2

Upper View

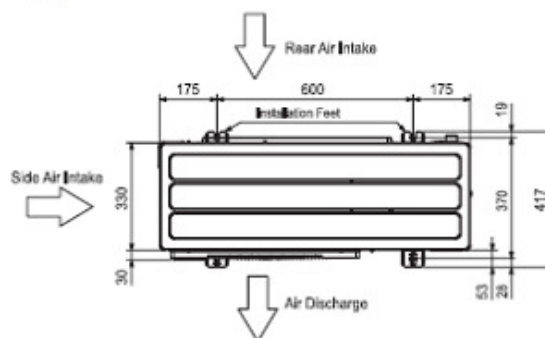

Front View

