

Landmark Trees

---

**ARBORICULTURAL IMPACT ASSESSMENT REPORT FOR:**

61 Redington Road  
London  
NW3 7RP

**INSTRUCTING PARTY:**

Mr & Mrs Burns

**REPORT PREPARED BY**

David Gardner  
MSc MArborA  
&  
Adam Hollis  
MSc ARB MICFor FARbor A MRICS C Env

**Ref:** HGH/61RDR/AIA/01f

**Date:** 3<sup>rd</sup> October 2024

The content and format of this report are for the exclusive use of the client in planning. It may not be sold, lent, hired out or divulged to any third party, not directly involved in the subject matter without Landmark Trees' written consent.

---

**Web:** [www.landmarktrees.co.uk](http://www.landmarktrees.co.uk)  
**e-mail:** [info@landmarktrees.co.uk](mailto:info@landmarktrees.co.uk)  
**Tel:** 0207 851 4544

**London Office:** Holden House, 4th Floor, 57 Rathbone Place London W1T 1JU

**Registered Office:** 15 Abbey Road, Oxford OX2 0AD

Landmark Trees is the trading name of Landmark trees Ltd. Registered in Wales. Reg No. 3882076



## PART 1: MAIN TEXT

Section	Content	Page No
1.0	SUMMARY	3
2.0	INTRODUCTION	4
3.0	SITE CHARACTERISTICS	9
4.0	DEVELOPMENT CONSTRAINTS	12
5.0	TABLE OF IMPACTS	15
6.0	ARBORICULTURAL IMPLICATIONS	16
7.0	CONCLUSION	17
8.0	RECOMMENDATIONS	18
9.0	COMPLIANCE	21
10.0	REFERENCES	22

## PART 2 - APPENDICES

APPENDIX 1	Survey Data	25
APPENDIX 2	Recommended Tree Works	28
APPENDIX 3	Recommended Tree Works to Facilitate Development	30

## PART 3 - PLANS

PLAN 1	Tree Constraints Plan	33
PLAN 2	Impact Assessment Plan(s)	35
PLAN 3	Outline Tree Protection Plan	37

## DOCUMENT HISTORY

Revision	Status	Comments	Date
Rev 0	DRAFT	For Internal Review (Client / Design Team)	04/03/2022
Rev 01a	AUTHORISED	For External Issue (Planning)	29/4/22
Rev 01b	AUTHORISED	For External Issue (Planning)	05/5/22
Rev 01c	DRAFT	For Internal Review (Client / Design Team)	12/05/23
Rev 01d	DRAFT	For Internal Review (Client / Design Team)	24/09/24
Rev 01e	DRAFT	For Internal Review (Client / Design Team)	01/10/24
Rev 01f	AUTHORISED	For External Issue (Planning)	03/10/24

## 1. SUMMARY

- 1.1 The site consists of a residential property. In December 2023, planning permission (ref: 2022/1962/P) was granted to convert the building into a house and a lower ground floor flat, with extensions and associated landscape works. This approved scheme is currently under construction. This application seeks a non-material amendment to planning permission (ref: 2022/1962/P) for tree and landscape works at the rear of the property. This includes the removal of the Birch tree (T4), along with the planting of 1 *Crataegus Prunifolia* 'Splendens' and 1 *Cornus mas*.
- 1.2 There are 9 trees on the property and adjoining land outside of the application boundary that are within close proximity to the development and need to be assessed. These are judged mostly moderate and low-quality trees, but with high quality tree T5 as a standout specimen. All trees are material constraints on development, but this requires particular consideration.
- 1.3 The report has assessed the impacts of the development proposals and concludes there would be at most a low-moderate additional impact from those consented, the only change comprises the removal of one moderate quality tree to facilitate the landscaping proposals. This tree has no public visibility and will be replaced with two specimens specifically chosen to form part of a wider landscape design.
- 1.4 Notwithstanding the above assurances, the report sets out a series of recommendations prior and during construction that will ensure impacts to trees are minimised. These are detailed in sections 6.3 and 8 of this report.
- 1.5 In conclusion, the proposal, through following the above recommendations, will have no, or very limited, impact on the existing trees and is acceptable.

\* British Standards Institute: Trees in relation to design, demolition and construction BS 5837: 2012 HMSO, London


## 2. INTRODUCTION

### 2.1 Terms of Reference

- 2.1.1 Landmark Trees (LT) were instructed by Mr and Mrs Burns to prepare this Arboricultural Impact Assessment to support a non-material amendment to planning permission 2022/1962/P submitted to the London Borough of Camden ('LBC').
- 2.1.2 The application is for amendments to planning permission dated 13 December 2023 (RN: 2022/1962/P) for, "*Conversion of 3 residential units to 2 units, erection of a three storey rear extension at lower ground to 1st floors including excavations at lower ground floor and a roof terrace at ground floor, creation of new front lightwell, various elevation alterations including additional dormer on side elevation, installation of 2 ASHP units in rear garden with enclosure, bin enclosure in front garden, and landscaping alterations.*"; specifically, at the rear garden, the removal of the Birch tree (T4) along with planting of 1no. *Crataegus prunifolia* 'Splendens' and 1no *Cornus mas*.
- 2.1.3 This report will assess the impact on trees and their constraints, identified in our survey. Although the proposals were known at the time of the survey, Landmark Trees endeavour to survey each site blind, working from a topographical survey, wherever possible, with the constraints plan informing their evolution. The purpose of the report is to provide guidance on how trees and other vegetation can be integrated into construction and development design schemes. The overall aim is to ensure the protection of amenity by trees which are appropriate for retention.

- 2.1.4 Trees are a material consideration for a Local Planning Authority when determining planning applications, whether or not they are afforded the statutory protection of a Tree Preservation Order or Conservation Area. British Standard BS 5837:2012 Trees in Relation to Design, Demolition and Construction sets out the principles and procedures to be applied to achieve a harmonious and sustainable relationship between trees and new developments. The Standard recommends a sequence of activities (see Fig.1 overleaf) that starts in the initial feasibility and design phase (RIBA Stage 2 'Concept Design' as defined in 2012) with a survey to qualify and quantify the trees on site and establish the arboricultural constraints to development (above- and below-ground) to inform the design in an iterative process, and continues with an assessment of the arboricultural impacts of the final design and measures to mitigate such impacts should they be negative. Detailed technical specifications for mitigation and protection measures are devised in the design phase that follows (RIBA Stage 3-4 'Developed and Technical design'), and the sequence ends with the Implementation and Aftercare phase (RIBA Stages 5-7) with the implementation of those measures once planning permission is granted, guided by Arboricultural Method Statements (RIBA Stage 4-5, 'Technical Design and Construction) and professional guidance where appropriate.
- 2.1.5 **This report is produced to support the Design Team to the Scheme Design Approvals stage in the process chart overleaf.**

Figure 1 The design and construction process and tree care

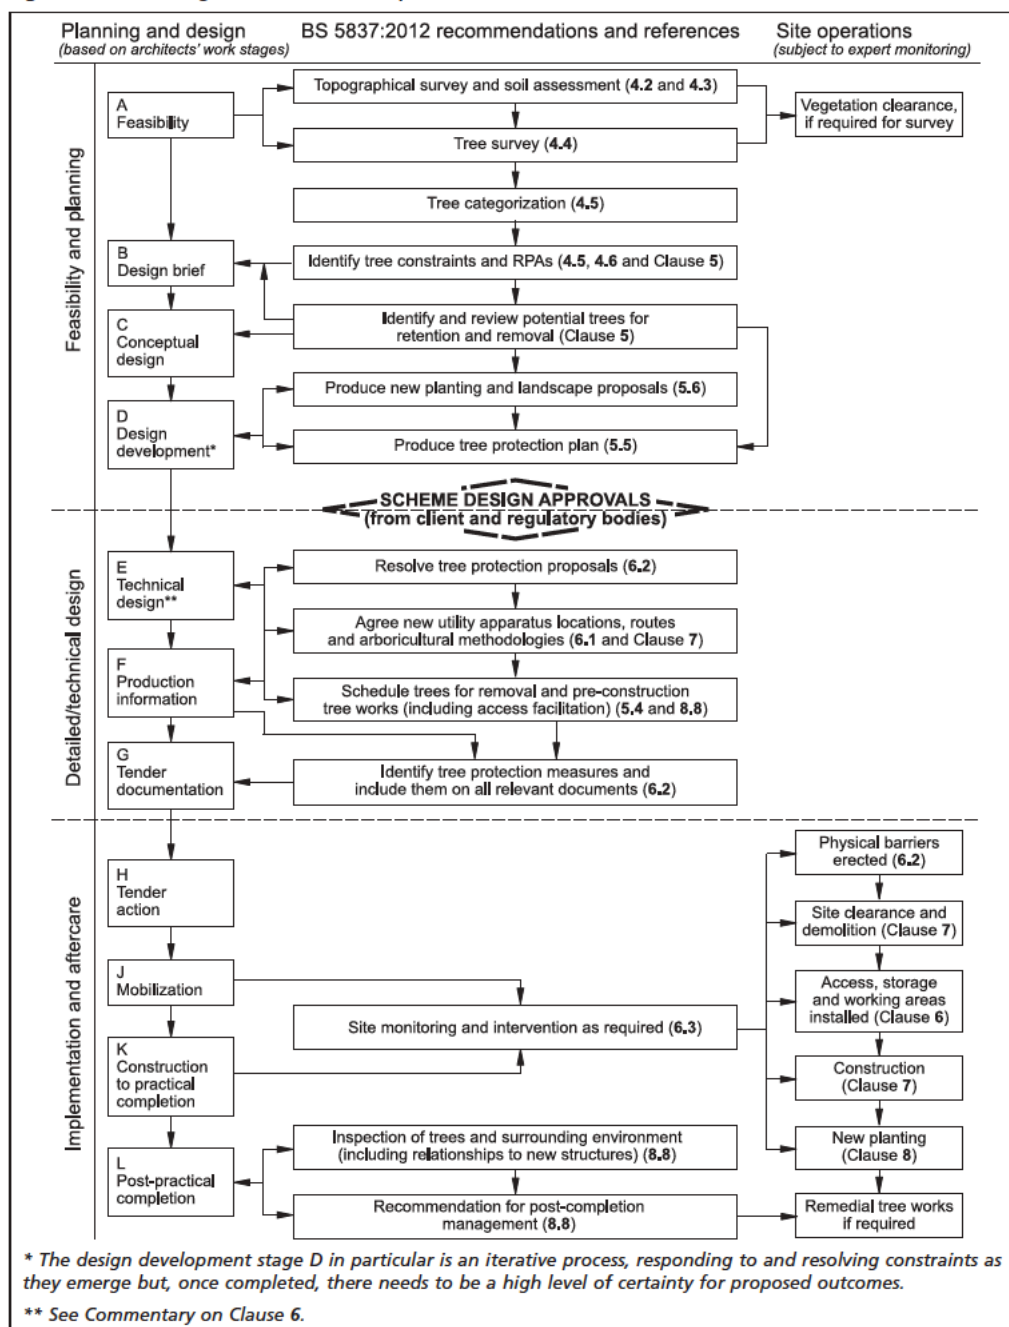

## 2.2 Drawings Supplied

- 2.2.1 The drawings supplied by the client and relied upon by Landmark Trees in the formulation of our survey plans are:

Existing site survey: 61 Redington Road, Hampstead, NW3 7RP – Topographical survey

Proposals: Site Plan Base CAD 23.09.2024

## 2.3 Scope & Limitations of Survey

- 2.3.1 As Landmark Trees' (LT) arboricultural consultant, Adam Hollis updated our previous surveys of the trees on site on the 3<sup>rd</sup> of September 2024, recording relevant qualitative data in order to assess both their suitability for retention and their constraints upon the site, in accordance with British Standard 5837:2012 Trees in relation to design, demolition and construction – Recommendations [BS5837:2012].
- 2.3.2 Our survey of the trees, the soils and any other factors, is of a preliminary nature. The trees were SURVEYED on the basis of the Visual Tree Assessment method expounded by Mattheck and Breloer (The Body Language of Trees, DoE booklet Research for Amenity Trees No. 4, 1994). LT have not taken any samples for analysis and the trees were not climbed but inspected from ground level.
- 2.3.3 The results of the tree survey, including material constraints arising from existing trees that merit retention, should be used (along with any other relevant baseline data) to inform feasibility studies and design options. For this reason, the tree survey should be completed and made available to designers prior to and/or independently of any specific proposals for development. Tree surveys undertaken after a detailed design has been prepared can identify significant conflicts: in such cases, the nature of and need for the proposed development should be set against the quality and values of affected trees. The extent to which the design can be modified to accommodate those trees meriting retention should be carefully considered. Where proposed development is subject to planning control, a tree survey should be regarded as an important part of the evidence base underpinning the design and access statement
- 2.3.4 A tree survey is generally considered invalid in planning terms after 2 years, but changes in tree condition may occur at any time, particularly after acute (e.g. storm events) or prolonged (e.g. drought) environmental stresses or injuries (e.g. root severance). Routine surveys at different times of the year and within two - three years of each other (subject to the incidence of the above stresses) are recommended for the health and safety management of trees remote from highways or busy access routes. Annual surveys are recommended for the latter.
- 2.3.5 The survey does not cover the arrangements that may be required in connection with the laying or removal of underground services.

## 2.4 Survey Data & Report Layout

- 2.4.1 Detailed records of individual trees are given in the survey schedule in Appendix 1. General husbandry recommendations are distinguished at Appendix 2 from minimum requirements to facilitate development which form part of the planning application at Appendix 3. The former may still be relevant to providing a safe site of work, of course. Planning considerations notwithstanding, we trust these necessary recommendations are passed on to relevant parties with due diligence and the trees to be managed appropriately.
- 2.4.2 A site plan identifying the surveyed trees, based on the Instructing Party's drawings / topographical survey is provided in Part 3 of this report. This plan also serves as the Tree Constraints Plan with the theoretical Recommended Protection Areas (RPA's), tree canopies and shade constraints, (from BS5837: 2012) overlain onto it. These constraints are then overlain in turn onto the Instructing Party's proposals to create a second Arboricultural Impact Assessment Plan in Part 3. Physical measures required to protect trees during construction are then added to this plan to create an Outline Tree Protection Plan. General observations, discussion, conclusions and recommendations follow, below.



### 3. SITE CHARACTERISTICS

#### 3.1 Property Description & Planning Context



Photograph 1: Aerial view of application site (Source: Google Maps)

- 3.1.1 This property is located on the western side of Redington Road and includes a substantial rear garden. The site is currently being developed under planning permission 2022/1962/P.
- 3.1.2 The site is relatively level throughout.
- 3.1.3 We are not aware of the existence of any Tree Preservation Orders\*, but understand the site stands within the Redington Frogna Conservation Area, which will affect the subject trees: it is a criminal offence to prune, damage or fell such trees without permission from the local authority.
- 3.1.4 Relevant local planning policies comprise Policies G1 and G7 of the London Plan 2021 and Policies A3, D1 and D2 of the Camden Local Plan (adopted 3rd July 2017)

\* If the client is aware of such, we ask that they confirm these details with us. A purchaser of a site will be informed of the existence of any TPO's during the conveyancing process; an existing owner of a site must be served with a copy of any TPO's made during their ownership. Landmark Trees can investigate the matter further on instruction from the client, but this is beyond our normal scope of instruction as it can take c. 28 days to fully discover this information (which is beyond our standard turnaround and will substantially delay the issue of the instructed report). Some LPA's maintain registers online and / or offer a more rapid telephone or email response. These services though are not wholly reliable and we have had experience of receiving incorrect advice.

### 3.2 Soil Description

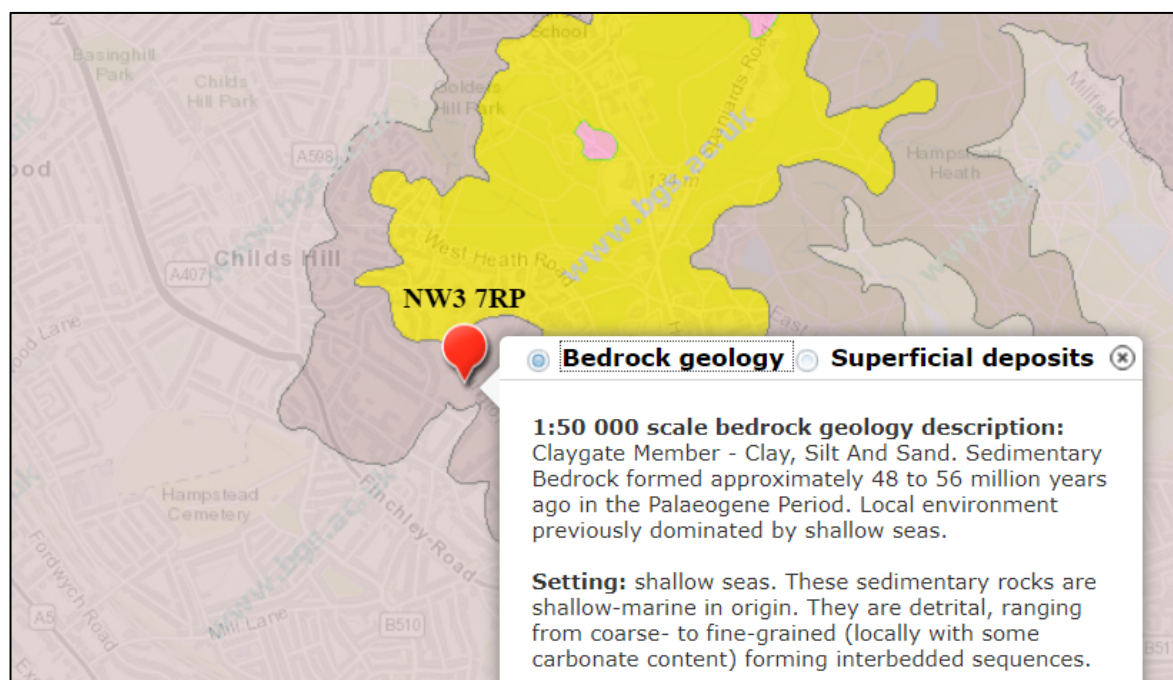


Figure 2: Extract from the BGS Geology of Britain Viewer

- 3.2.1 In terms of the British Geological Survey, the site overlies the Claygate Member / Beds (see dark area on plan extract above). As the youngest part of the London Clay, they form a transition between the clay and the sandier Bagshot Beds above (shown in yellow). Unlike the Bagshot Beds, more typical of Hampstead Heath, the associated soils are generally, highly shrinkable clay; e.g. slowly permeable seasonally waterlogged fine loam over clay. Such highly plastic soils are prone to movement: subsidence and heave.
- 3.2.2 The actual limits of soil series are not as clearly defined on the ground as on plan and there may be anomalies between them. Further advice from the relevant experts on the specific soil properties can be sought as necessary.
- 3.2.3 Clay soils are prone to compaction during development. Damage to soil structure can have a serious impact on tree health. Design of foundations near problematic tree species will also need to take into consideration subsidence risk.

### 3.3 Subject Trees

- 3.3.1 Of the 9 surveyed trees, 1 is category\* A (High Quality), 3 are category B (Moderate Quality) and 5 are category C (Low Quality); none are category U (Poor Quality).
- 3.3.2 The tree species found on the site comprise common yew, sweet chestnut, common hawthorn, Himalayan birch, copper beech, southern magnolia, English oak and horse chestnut.
- 3.3.3 In terms of age demographics there is an even mix of semi-mature, early mature and mature trees present.
- 3.3.4 Full details of the surveyed trees can be found in Appendix 1 of this report.
- 3.3.5 There are recommended works for 2 trees. These are listed in Appendix 2.

\*page 9 of: [British Standards Institute: Trees in relation to design, demolition and construction BS 5837: 2012 HMSO, London](#)

## 4. DEVELOPMENT CONSTRAINTS

### 4.1 Primary Constraints

- 4.1.1 BS5837: 2012 gives Recommended Protection Areas (RPA's) for any given tree size. The individual RPA's are calculated in the Tree Schedule in Appendix 1 to this report, or rather the notional radius of that RPA, based on a circular protection zone. The prescribed radius is 12-x stem diameter at 1.5m above ground level, except where composite formulae are used in the case of multi-stemmed trees.
- 4.1.2 Circular RPA's are appropriate for individual specimen trees grown freely, but where there is ground disturbance, the morphology of the RPA can be modified to an alternative polygon, as shown in the diagram below (Figure 2). Alternatively, one need principally remember that RPA's are area-based and not linear – notional rather than fixed entities.

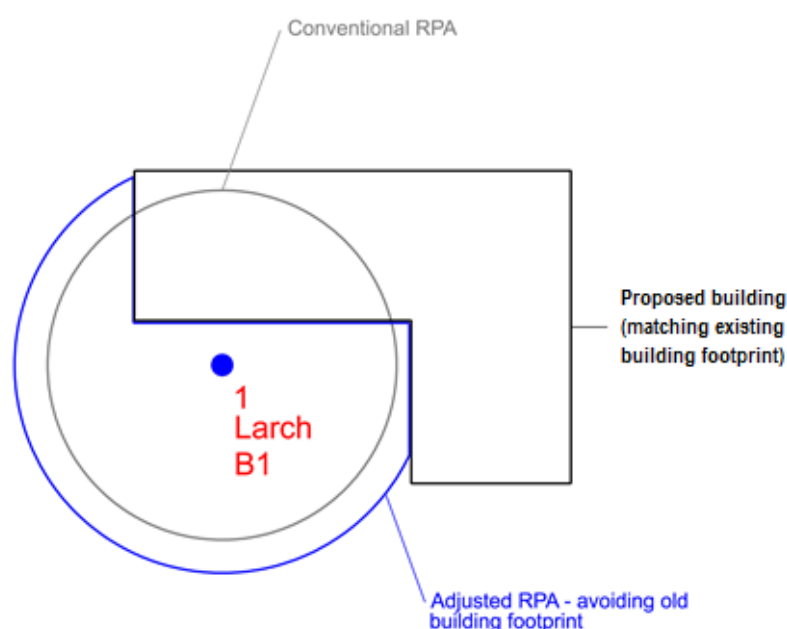



Figure 2 – Generic BS 5837 RPA Adjustments

- 4.1.3 In BS5837, paragraph 4.6.2 states that RPA's should reflect the morphology and disposition of the roots; where pre-existing site conditions or other factors indicate that rooting has occurred asymmetrically, a polygon of equivalent area should be produced. Modifications to the shape of the RPA should reflect a soundly based arboricultural assessment of likely root distribution. This can be done as a desktop / theoretical exercise but is not altogether (scientifically) reliable and may also invite disagreement / differences of opinion as to that distribution.


- 4.1.4 LT prefer where possible and practical to raise the issue of modification but suspend judgment until such time as more reliable site investigations have been undertaken (Tree Radar scans and / or trial pits). Of course, the justification for these investigations will depend upon whether trees are (or are likely to be once modified) subject to impacts and also upon their quality / condition: it is generally not worth commissioning a radar study to locate the roots of a poor- or low-quality tree. On other occasions, there may not be the opportunity to commission investigations, either because the access is restricted by ownership / tenancy or the report's turnaround simply does not allow it, and they may need to follow on or be conditioned. **No *a priori* RPA modifications have been made in this instance on account of the prevailing site conditions.**
- 4.1.5 The quality of trees will also be a consideration: U Category trees are discounted from the planning process in view of their limited useful life expectancy. Again, Category-C trees would not normally constrain development individually, unless they provide some external screening function.
- 4.1.6 At paragraph 5.1.1. BS5837: 2012 notes that "Care should be exercised over misplaced tree preservation; attempts to retain too many or unsuitable trees on a site are liable to result in excessive pressure on the trees during demolition or construction work, or post-completion demands on their removal."
- 4.1.7 In theory, only moderate quality trees and above are significant material constraints on development. However, low quality trees comprise a constraint in aggregate, in terms of any collective loss / removal, where replacement planting is generally considered appropriate.
- 4.1.8 In this instance, the high and moderate quality trees present have the potential to pose significant constraints to development of the site.

### 4.3 Secondary Constraints

- 4.3.1 The second type of constraint produced by trees that are to be retained is that the proximity of the proposed development to the trees should not threaten their future with ever increasing demands for tree surgery or felling to remove nuisance shading (Figure 3), honeydew deposition or perceived risk of harm.

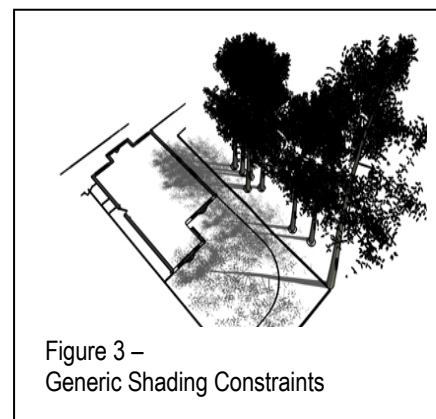

- 4.3.2 The shading constraints are crudely determined from BS5837 by drawing an arc from northwest to east of the stem base at a distance equal to the height of the tree, as shown in the diagram opposite. Shade is less of a constraint on non-residential developments, particularly where rooms are only ever temporarily occupied.

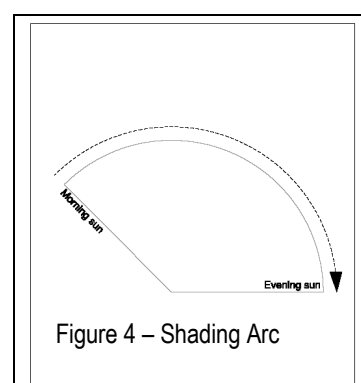

- 4.3.3 This arc (see Figure 4) represents the effects that a tree will have on layout through shade, based on shadow patterns of 1x tree height for a period May to Sept inclusive 10.00-18.00 hrs daily.
- 4.3.4 Assuming that they will be retained, the orientation of the on- and off-site trees within / around the rear garden means they have the potential to provide a variety of secondary constraints, including shading, organic deposition and the potential need to maintain crown clearance in the future. The significance of these constraints will vary depending on the location and proximity to the proposed re-development which is considered below (in Sections 5 & 6). As specified by BS5837, this section (4) of the report considers only the site as it is, not in the light of pending proposals.

Table 1: Arboricultural Impact Assessment

(Impacts assessed prior to mitigation and rated with reference to Matheny & Clark (1998))

Hide irrelevant

Show All Trees

Ref: HGH/61RDR/AIA

B.S. Cat.	Tree No.	Species	Impact	Tree / RPA Affected	Age	Growth Vitality	Species Tolerance	Impact on Tree Rating	Impact on Site Rating	Mitigation
B	4	Birch, Himalayan	Felled to Facilitate Development	m <sup>2</sup> N/A %	Early Mature	Normal	N/A	N/A	Medium	New planting / landscaping



## 6. ARBORICULTURAL IMPLICATIONS

### 6.1 Rating of Primary Impacts

- 6.1.1 This non-material amendment gives rise to one impact beyond those already consented, the removal of the Himalayan birch T4. Whilst this is of moderate quality it provides no public amenity and as such makes a very limited contribution to the Conservation Area. As paragraph 2.1.2 states, this tree will be replaced with two new specimens planted in the locations shown on Figure 5 below. Whilst this tree is of moderate quality, its relatively small size means its loss is only of low-medium impact in the short term, reducing to low impact / betterment as the replacements mature.

### 6.2 Rating of Secondary Impacts

- 6.2.1 This amendment does not alter our previous assessment of the secondary impacts of development being minimal.

### 6.3 Mitigation of Impacts

- 6.3.1 The 1 *Crataegus Prunifolia* 'Splendens' and 1 *Cornus mas* as well as the wider landscaping will offer considerable enhancement in time. These replacement trees have the advantage of being specifically selected for the proposed site, healthy and fit-for-purpose. The landscape design has provided for a diverse range of native and ornamental species that will complement rather than conflict with the proposals, so providing a more sustainable long-term resource for the future.

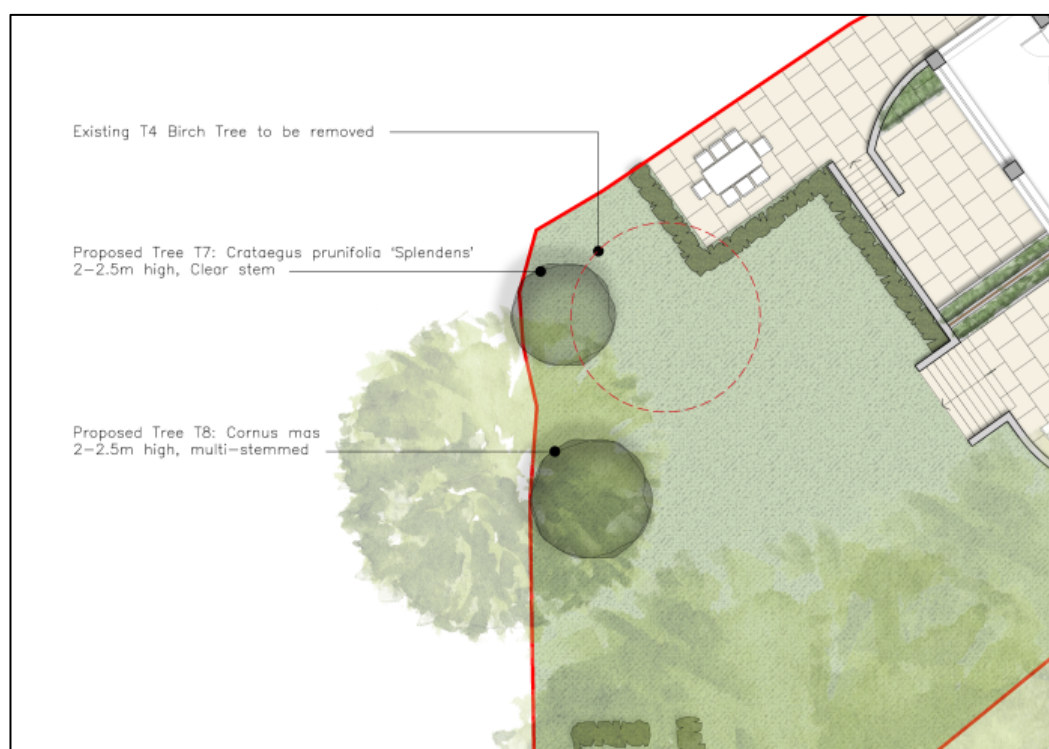


Figure 5: Proposed replacement tree locations



## **7. CONCLUSION**

- 7.1 The potential impacts of this non-material amendment are relatively low in terms of both quality of tree removed with no additional RPA encroachments of trees retained.
- 7.2 The full potential of the entire development can thus be largely mitigated through design and precautionary measures.
- 7.3 The tree that is recommended for felling is of relatively little individual significance, such that its loss will not affect the visual character of the area. The planting of 1no. *Crataegus prunifolia* 'Splendens' and 1no *Cornus mas* provides sufficient mitigation for the loss of this tree.
- 7.4 Therefore, the proposals will not have any significant impact on either the retained trees or wider landscape thereby complying with Policies G1 and G7 of the London Plan 2021 and Policies A3, A5 and D2 of the Camden Local Plan (adopted 3rd July 2017). Thus, with suitable mitigation and supervision the scheme is recommended to planning.

## 8. RECOMMENDATIONS

### 8.1 Specific Recommendations

- 8.1.1 Tree works recommendations in Appendix 2 are not part of the current application, but requirements of general maintenance that will need to be applied for (subject to para. 3.3 of this report and any other relevant constraints in planning or leasehold) by the client separately. Consent for the current planning application does not impart any consent for the Appendix 2 maintenance works. Please note, though, the owner and / or manager of a property have a duty to maintain a safe site of work and to protect occupiers of the surrounding land / members of the public from tree hazards. Works recommended in this report should be enacted in a timely fashion by the relevant party regardless of the progress of the development.
- 8.1.2 Recommendations for works required to facilitate development are found in Appendix 3. Any tree removals recommended within this report should only be carried out with local authority consent.
- 8.1.3 Excavation and construction impacts within the retained trees will still need to be controlled by method statements specifying mitigation methods suggested in para 6.3 above and by consultant supervision as necessary.
- 8.1.4 Replace T4 with 1no. *Crataegus prunifolia* 'Splendens' and 1no *Cornus mas*.

## 8.2 General Recommendations for Sites Being Developed with Trees / Outline Arboricultural Method Statement

- 8.2.1 Any trees which are in close proximity to the proposed development should be protected with a Tree Protection Barrier (TPB). Protective barrier fencing should be installed immediately following the completion of the tree works, remaining in situ for the entire duration of the development unless otherwise agreed in writing by the Council. It should be appropriate for the intensity and proximity of the development, usually comprising steel, mesh panels 2.4m in height ('Heras') and should be mounted on a scaffolding frame (shown in Fig 2 of BS5837:2012). The position of the TPB can be shown on plan as part of the discharge of conditions, once the layout is agreed with the planning authority. The TPB should be erected prior to commencement of works, remain in its original form on-site for the duration of works and be removed only upon full completion of works.
- 8.2.2 A TPB may no longer be required during soft landscaping work but a full arboricultural assessment must be performed prior to the undertaking of any excavations within the RPA of a tree. This will inform a decision about the requirement of protection measures. It is important that all TPBs have permanent, weatherproof notices denying access to the RPA. Extant areas of RPA that cannot be fenced off and therefore lie outside the CEZ must be protected with fit-for-purpose ground protection. The location and type of ground protection is shown in the Tree Protection Plan in the Appendices
- 8.2.3 The use of heavy plant machinery for building demolition, removal of imported materials and grading of surfaces should take place in one operation. The necessary machinery should be located above the existing grade level and work away from any retained trees. This will ensure that any spoil is removed from the RPAs. It is vital that the original soil level is not lowered as this is likely to cause damage to the shallow root systems.
- 8.2.4 Any pruning works must be in accordance with British Standard 3998:2010 Tree work [BS3998].
- 8.2.5 Where sections of hard surfacing are proposed in close proximity to trees, it is recommended that "No-Dig" surfacing be employed in accordance with BS5837:2012 and 'The Principles of Arboricultural Practice: Note 1, Driveways Close to Trees, AAIS 1996 [APN1]'.
- 8.2.6 If the RPA of a tree is encroached by underground service routes then BS5837:2012 and NJUG VOLUME 4 provisions should be employed. If it is deemed necessary, further arboricultural advice must be sought.
- 8.2.7 Numerous site activities are potentially damaging to trees e.g. parking, material storage, the use of plant machinery and all other sources of soil compaction. In operating plant, particular care is required to ensure that the operational arcs of excavation and lifting machinery, including their loads, do not physically damage trees when in use.

8.2.8 To enable the successful integration of the proposal with the retained trees, the following points will need to be taken into account:

- 1) Plan of underground services.
- 2) Schedule of tree protection measures, including the management of harmful substances.
- 3) Method statements for constructional variations regarding tree proximity (e.g. foundations, surfacing and scaffolding).
- 4) Site logistics plan to include storage, plant parking/stationing and materials handling.
- 5) Tree works: felling, required pruning and new planting. All works must be carried out by a competent arborist in accordance with BS3998.
- 6) Site supervision: the Site Agent must be nominated to be responsible for all day-to-day arboricultural matters on site. This person must:
  - be present on site for the majority of the time;
  - be aware of the arboricultural responsibilities;
  - have the authority to stop work causing, or may cause harm to any tree;
  - ensure all site operatives are aware of their responsibilities to the trees on site and the consequences of a failure to observe these responsibilities;
  - arrange with the retained arboricultural consultant an initial pre-start briefing to inspect tree protection measures and agree a schedule of monitoring thereof on an initial monthly basis to be reviewed over the duration of works.
  - give advance notice (ideally 2 weeks) to retained arboricultural consultant to arrange for supervision of any excavation (especially for services and foundations) within RPA
  - make immediate contact with the local authority and/or a retained arboricultural consultant in the event of any tree related problems occurring.

8.2.9 These points can be resolved and approved through consultation with the planning authority via their Arboricultural Officer.

8.2.10 The sequence of works should be as follows:

- i) initial tree works: felling, stump grinding and pruning for working clearances;
- ii) installation of TPB for demolition & construction;
- iii) installation of underground services;
- iv) installation of ground protection;
- v) main construction;
- vi) removal of TPB;
- vii) soft landscaping.

## 9. COMPLIANCE: Trees and the Planning System

- 9.1 Under the UK planning system, local authorities have a statutory duty to consider the protection and planting of trees when granting planning permission for proposed development. The potential effect of development on trees, whether statutorily protected (e.g. by a tree preservation order or by their inclusion within a conservation area) or not, is a material consideration that is taken into account in dealing with planning applications. Where trees are statutorily protected, it is important to contact the local planning authority and follow the appropriate procedures before undertaking any works that might affect the protected trees.
- 9.2 The nature and level of detail of information required to enable a local planning authority to properly consider the implications and effects of development proposals varies between stages and in relation to what is proposed. Table B.1 provides advice to both developers and local authorities on an appropriate amount of information. The term “minimum detail” is intended to reflect information that local authorities are expected to seek, whilst the term “additional information” identifies further details that might reasonably be sought, especially where any construction is proposed within the RPA.
- 9.3 This report delivers information appropriate to a full planning application and to these specific proposals as per BS5837 Table B.1 below, providing both minimum details and further additional material in the form of general tree protection recommendations and constructional variation.

Table B.1 Delivery of tree-related information into the planning system

Stage of process	Minimum detail	Additional information
Pre-application	Tree survey	Tree retention/removal plan (draft)
Planning application	Tree survey (in the absence of pre-application discussions)	Existing and proposed finished levels
	Tree retention/removal plan (finalized)	Tree protection plan
	Retained trees and RPAs shown on proposed layout	Arboricultural method statement – heads of terms
	Strategic hard and soft landscape design, including species and location of new tree planting	Details for all special engineering within the RPA and other relevant construction details
	Arboricultural impact assessment	
Reserved matters/ planning conditions	Alignment of utility apparatus (including drainage), where outside the RPA or where installed using a trenchless method	Arboricultural site monitoring schedule
	Dimensioned tree protection plan	Tree and landscape management plan
	Arboricultural method statement – detailed	Post-construction remedial works
	Schedule of works to retained trees, e.g. access facilitation pruning	Landscape maintenance schedule
	Detailed hard and soft landscape design	

## 10.0 REFERENCES

- Barlow JF & Harrison G. 1999. Shade By Trees, Arboricultural Practice Note 5, AAIS, Farnham, Surrey.
- British Standards Institute. 2012. Trees in Relation to Design, Demolition and Construction - Recommendations BS 5837: 2012 HMSO, London.
- Centre for Ecology & Hydrology. 2006. Tree Roots in the Built Environment, HMSO, London.
- Helliwell R (1980) Provision for New Trees; Landscape Design; July/August issue
- International Society of Arboriculture (ISA). 1994. The Landscape Below Ground. ISA, Champaign, Illinois. USA.
- Lonsdale D 1999. Research for Amenity Trees No.7: Principles of Tree Hazard Assessment and Management, HMSO, London.
- Matheny, N; Clark, J. R.1998. Trees and Development: A Technical Guide to Preservation of Trees during Land Development. ISA, Champaign, Illinois. USA.
- Mattheck C. & Breloer H. 1994. Research for Amenity Trees No.2: The Body Language of Trees, HMSO, London.
- Thomas P, 2000 & 2014. Trees: Their Natural History, Cambridge University Press, Cambridge.
- Trowbridge J & Bassuk N (2004) Trees in the Urban Landscape: Site Assessment, Design, and Installation; J Wiley & Sons inc. NJ USA



### Caveats

This report is primarily an arboricultural report. Whilst comments relating to matters involving built structures or soil data may appear, any opinion thus expressed should be viewed as qualified, and confirmation from an appropriately qualified professional sought. Such points are usually clearly identified within the body of the report. It is not a full safety survey or subsidence risk assessment survey. These services can be provided but a further fee would be payable. Where matters of tree condition with a safety implication are noted during a survey they will of course appear in the report.

A tree survey is generally considered invalid in planning terms after 2 years, but changes in tree condition may occur at any time, particularly after acute (e.g. storm events) or prolonged (e.g. drought) environmental stresses or injuries (e.g. root severance). Routine surveys at different times of the year and within two - three years of each other (subject to the incidence of the above stresses) are recommended for the health and safety management of trees remote from highways or busy access routes. Annual surveys are recommended for the latter.

Tree works recommendations are found in the Appendices to this report. It is assumed, unless otherwise stated ("ASAP" or "Option to") that all husbandry recommendations will be carried out within 6 months of the report's first issue. Clearly, works required to facilitate development will not be required if the application is shelved or refused. However, necessary husbandry work should not be shelved with the application and should be brought to the attention of the person responsible, by the applicant, if different. Under the Occupiers Liability Act of 1957, the owner (or his agent) of a tree is charged with the due care of protecting persons and property from foreseeable damage and injury.' He is responsible for damage and/or nuisance arising from all parts of the tree, including roots and branches, regardless of the property on which they occur. He also has a duty under The Health and Safety at Work Act 1974 to provide a safe place of work, during construction. Tree works should only be carried out with local authority consent, where applicable.

Inherent in a tree survey is assessment of the risk associated with trees close to people and their property. Most human activities involve a degree of risk, such risks being commonly accepted if the associated benefits are perceived to be commensurate.

Risks associated with trees tend to increase with the age of the trees concerned, but so do many of the benefits. It will be appreciated, and deemed to be accepted by the client, that the formulation of recommendations for all management of trees will be guided by the cost-benefit analysis (in terms of amenity), of tree work that would remove all risk of tree related damage.

Prior to the commencement of any tree works, an ecological assessment of specific trees may be required to ascertain whether protected species (e.g. bats, badgers and invertebrates etc.) may be affected.



Landmark Trees

---

## PART 2 – APPENDICES



## APPENDIX 1

### TREE SCHEDULE

#### Botanical Tree Names

Beech, Copper	: <i>Fagus sylvatica</i> f. <i>purpurea</i>	Magnolia, Southern	: <i>Magnolia grandiflora</i>
Birch, Himalayan	: <i>Betula utilis</i>	Oak, English	: <i>Quercus robur</i>
Chestnut, Sweet	: <i>Castanea sativa</i>	Oak, Holm	: <i>Quercus ilex</i>
Chestnut, Horse	: <i>Aesculus hippocastanum</i>	Yew, Common	: <i>Taxus baccata</i>
Hawthorn, Common	: <i>Crataegus monogyna</i>		

#### Notes for Guidance:

1. Height describes the approximate height of the tree measured in metres from ground level.
2. The Crown Spread refers to the crown radius in meters from the stem centre and is expressed as an average of NSEW aspect if symmetrical.
3. Ground Clearance is the height in metres of crown clearance above adjacent ground level.
4. Stem Diameter (Dm) is the diameter of the stem measured in millimetres at 1.5m from ground level for single stemmed trees. BS 5837:2012 formula (Section 4.6) used to calculate diameter of multi-stemmed trees. Stem Diameter may be estimated where access is restricted and denoted by '#'.
5. Protection Multiplier is 12 and is the number used to calculate the tree's protection radius and area
6. Protection Radius is a radial distance measured from the trunk centre.
7. Growth Vitality - Normal growth, Moderate (below normal), Poor (sparse/weak), Dead (dead or dying tree).
8. Structural Condition - Good (no or only minor defects), Fair (remediable defects), Poor - Major defects present.
9. Landscape Contribution - High (prominent landscape feature), Medium (visible in landscape), Low (secluded/among other trees).
10. B.S. Cat refers to (British Standard 5837:2012 section 4.5) and refers to tree/group quality and value; 'A' – High, 'B' - Moderate, 'C' - Low, 'U' - Unsuitable for retention. The following colouring has been used on the site plans:
  - High Quality (A) (Green),
  - Moderate Quality (B) (Blue),
  - Low Quality (C) (Grey),
  - Unsuitable for Retention (U) (Red)
11. Sub Cat refers to the retention criteria values where 1 is Arboricultural, 2 is Landscape and 3 is Cultural including Conservational, Historic and Commemorative.
12. Useful Life is the tree's estimated remaining contribution in years.



**Site:** 61 Redington Road  
**Date:** 11/2/22, 24/7/23 & 03/09/24

## Appendix 1

**Landmark Trees Ltd**

**020 7851 4544**

**Surveyor(s):** Kim Dear & Adam Hollis

**Ref:** HGH/61RDR/AIA

### BS5837 Tree Constraints Survey Schedule

Tree No.	English Name	Height	Crown Spread	Ground Clearance	Stem Diamete	Age Class	Protection Radius	Growth Vitality	Structural Condition	B.S. Cat	Sub Cat	Useful Life	Comments
1	Yew, Common	9.5	3544	3.0	550	Early Mature	6.6	Normal	Good	B	2	>40	Lifting pavement / drive neighbours fence/ wall immediately adjacent
2	Chestnut, Sweet	9.5	2231	2.5	320	Semi-mature	3.8	Normal	Fair	C	2	>40	Lifting pavement / drive limb removed over drive, will cause damage to pavement.
3	Hawthorn, Common	7	2333	4.0	240	Mature	2.9	Moderate	Fair	C	2	20+	Remote survey only (RS) Ivy smothered in neighbours garden, a sparser than normal canopy
4	Birch, Himalayan	9	3352	1.5	237	Early Mature	2.8	Normal	Good	B	2	>40	Leaning (slightly) paperbark birch
5	Beech, Copper	19	11,9,8,9	4.5	1200	Mature	14.4	Normal	Good	A	1	>40	
6	Magnolia, Southern	5	4424	1.5	180	Early Mature	2.2	Moderate	Fair	C	2	20+	Excessively crown thinned Pronounced lean



**Site:** 61 Redington Road  
**Date:** 11/2/22, 24/7/23 & 03/09/24

Appendix 1

**Landmark Trees Ltd**  
**020 7851 4544**  
**Surveyor(s):** Kim Dear & Adam Hollis  
**Ref:** HGH/61RDR/AIA

BS5837 Tree Constraints Survey Schedule

Tree No.	English Name	Height	Crown Spread	Ground Clearance	Stem Diamete	Age Class	Protection Radius	Growth Vitality	Structural Condition	B.S. Cat	Sub Cat	Useful Life	Comments
7	Oak, English	17	5744	2.0	850	Mature	10.2	Poor	Fair	C	2	20+	Remote survey only (RS) Dying back (uniform) reduced, possible root disturbance Deadwood (minor)
9	Chestnut, Horse	12	9656	4.5	700	Mature	8.4	Normal	Good	B	2	>40	
10	Oak, Holm	5	2111	1.5	150	Semi-mature	1.8	Normal	Good	C	2	>40	

## APPENDIX 2

### RECOMMENDED TREE WORKS

#### Notes for Guidance:

#### **Priority 1 - Urgent (ASAP), 2 - Standard (within 6 months), 3 - Non-urgent (2-3 years)**

- CB - Cut Back to boundary/clear from structure.
- CL# - Crown Lift to given height in meters.
- CT#% - Crown Thinning by identified %.
- CR#% - Crown Reduce by given maximum % (of outermost branch & twig length)
- DWD - Remove deadwood.
- Fell - Fell to ground level.
- FInv - Further Investigation (generally with decay detection equipment).
- Pol - Pollard or re-pollard.
- Mon - Check / monitor progress of defect(s) at next consultant inspection which should be <18 months in frequented areas and <3 years in areas of more occasional use. Where clients retain their own ground staff, we recommend an annual in- house inspection and where practical, in the aftermath of extreme weather events.
- Svr Ivy / Clr Bs - Sever ivy / clear base and re-inspect base / stem for concealed defects.



**Site:** 61 Redington Road

**Date:** 11/2/22, 24/7/23 & 03/09/24

**Surveyor(s):** Kim Dear & Adam Hollis

**Ref:** HGH/61RDR/AIA

**Appendix 2**

**Recommended Tree Works**

Hide irrelevant  
Show All Trees

Tree No.	English Name	B.S. Cat	Height	Ground Clearance	Crown Spread	Recommended Works	Comments/ Reasons
3	Hawthorn, Common	C	7	4.0	2333	Mon	Remote survey only (RS) Ivy smothered in neighbours garden, a sparser than normal canopy Management Priority 3
6	Magnolia, Southern	C	5	1.5	4424	Mon	Excessively crown thinned Pronounced lean Management Priority 3

## APPENDIX 3

### RECOMMENDED TREE WORKS TO FACILITATE DEVELOPMENT (See Table 1)

#### Notes for Guidance:

- RP - Pre-emptive root pruning of foundation encroachments under arboricultural supervision.
- CB - Cut Back to boundary/clear from structure.
- CL# - Crown Lift to given height in meters.
- CT#% - Crown Thinning by identified %.
- CCL - Crown Clean (remove deadwood/crossing and hazardous branches and stubs)\*.
- CR#% - Crown Reduce by given maximum % (of outermost branch & twig length)
- DWD - Remove deadwood.
- Fell - Fell to ground level.
- FInv - Further Investigation (generally with decay detection equipment).
- Pol - Pollard or re-pollard.
- Mon - Check / monitor progress of defect(s) at next consultant inspection which should be <18 months in frequented areas and <3 years in areas of more occasional use. Where clients retain their own ground staff, we recommend an annual in- house inspection and where practical, in the aftermath of extreme weather events.
- Svr Ivy / Clr Bs - Sever ivy / clear base and re-inspect base / stem for concealed defects.

\*Not generally specified following BS3998:2010



Landmark Trees

Site: 61 Redington Road  
Date: 11/2/22, 24/7/23 & 03/09/24

Appendix 3

Surveyor(s): Kim Dear & Adam Hollis  
Ref: HGH/61RDR/AIA

Recommended Tree Works To Facilitate Development

Hide irrelevant  
Show All Trees

Tree No.	English Name	B.S. Cat	Height	Ground Clearance	Crown Spread	Recommended Works	Comments/ Reasons
4	Birch, Himalayan	B	9	1.5	3352	Fell	Leaning (slightly) paperbark birch To allow landscape enhancement




Landmark Trees

---

## PART 3 – PLANS



**PLAN 1****TREE CONSTRAINTS PLAN**

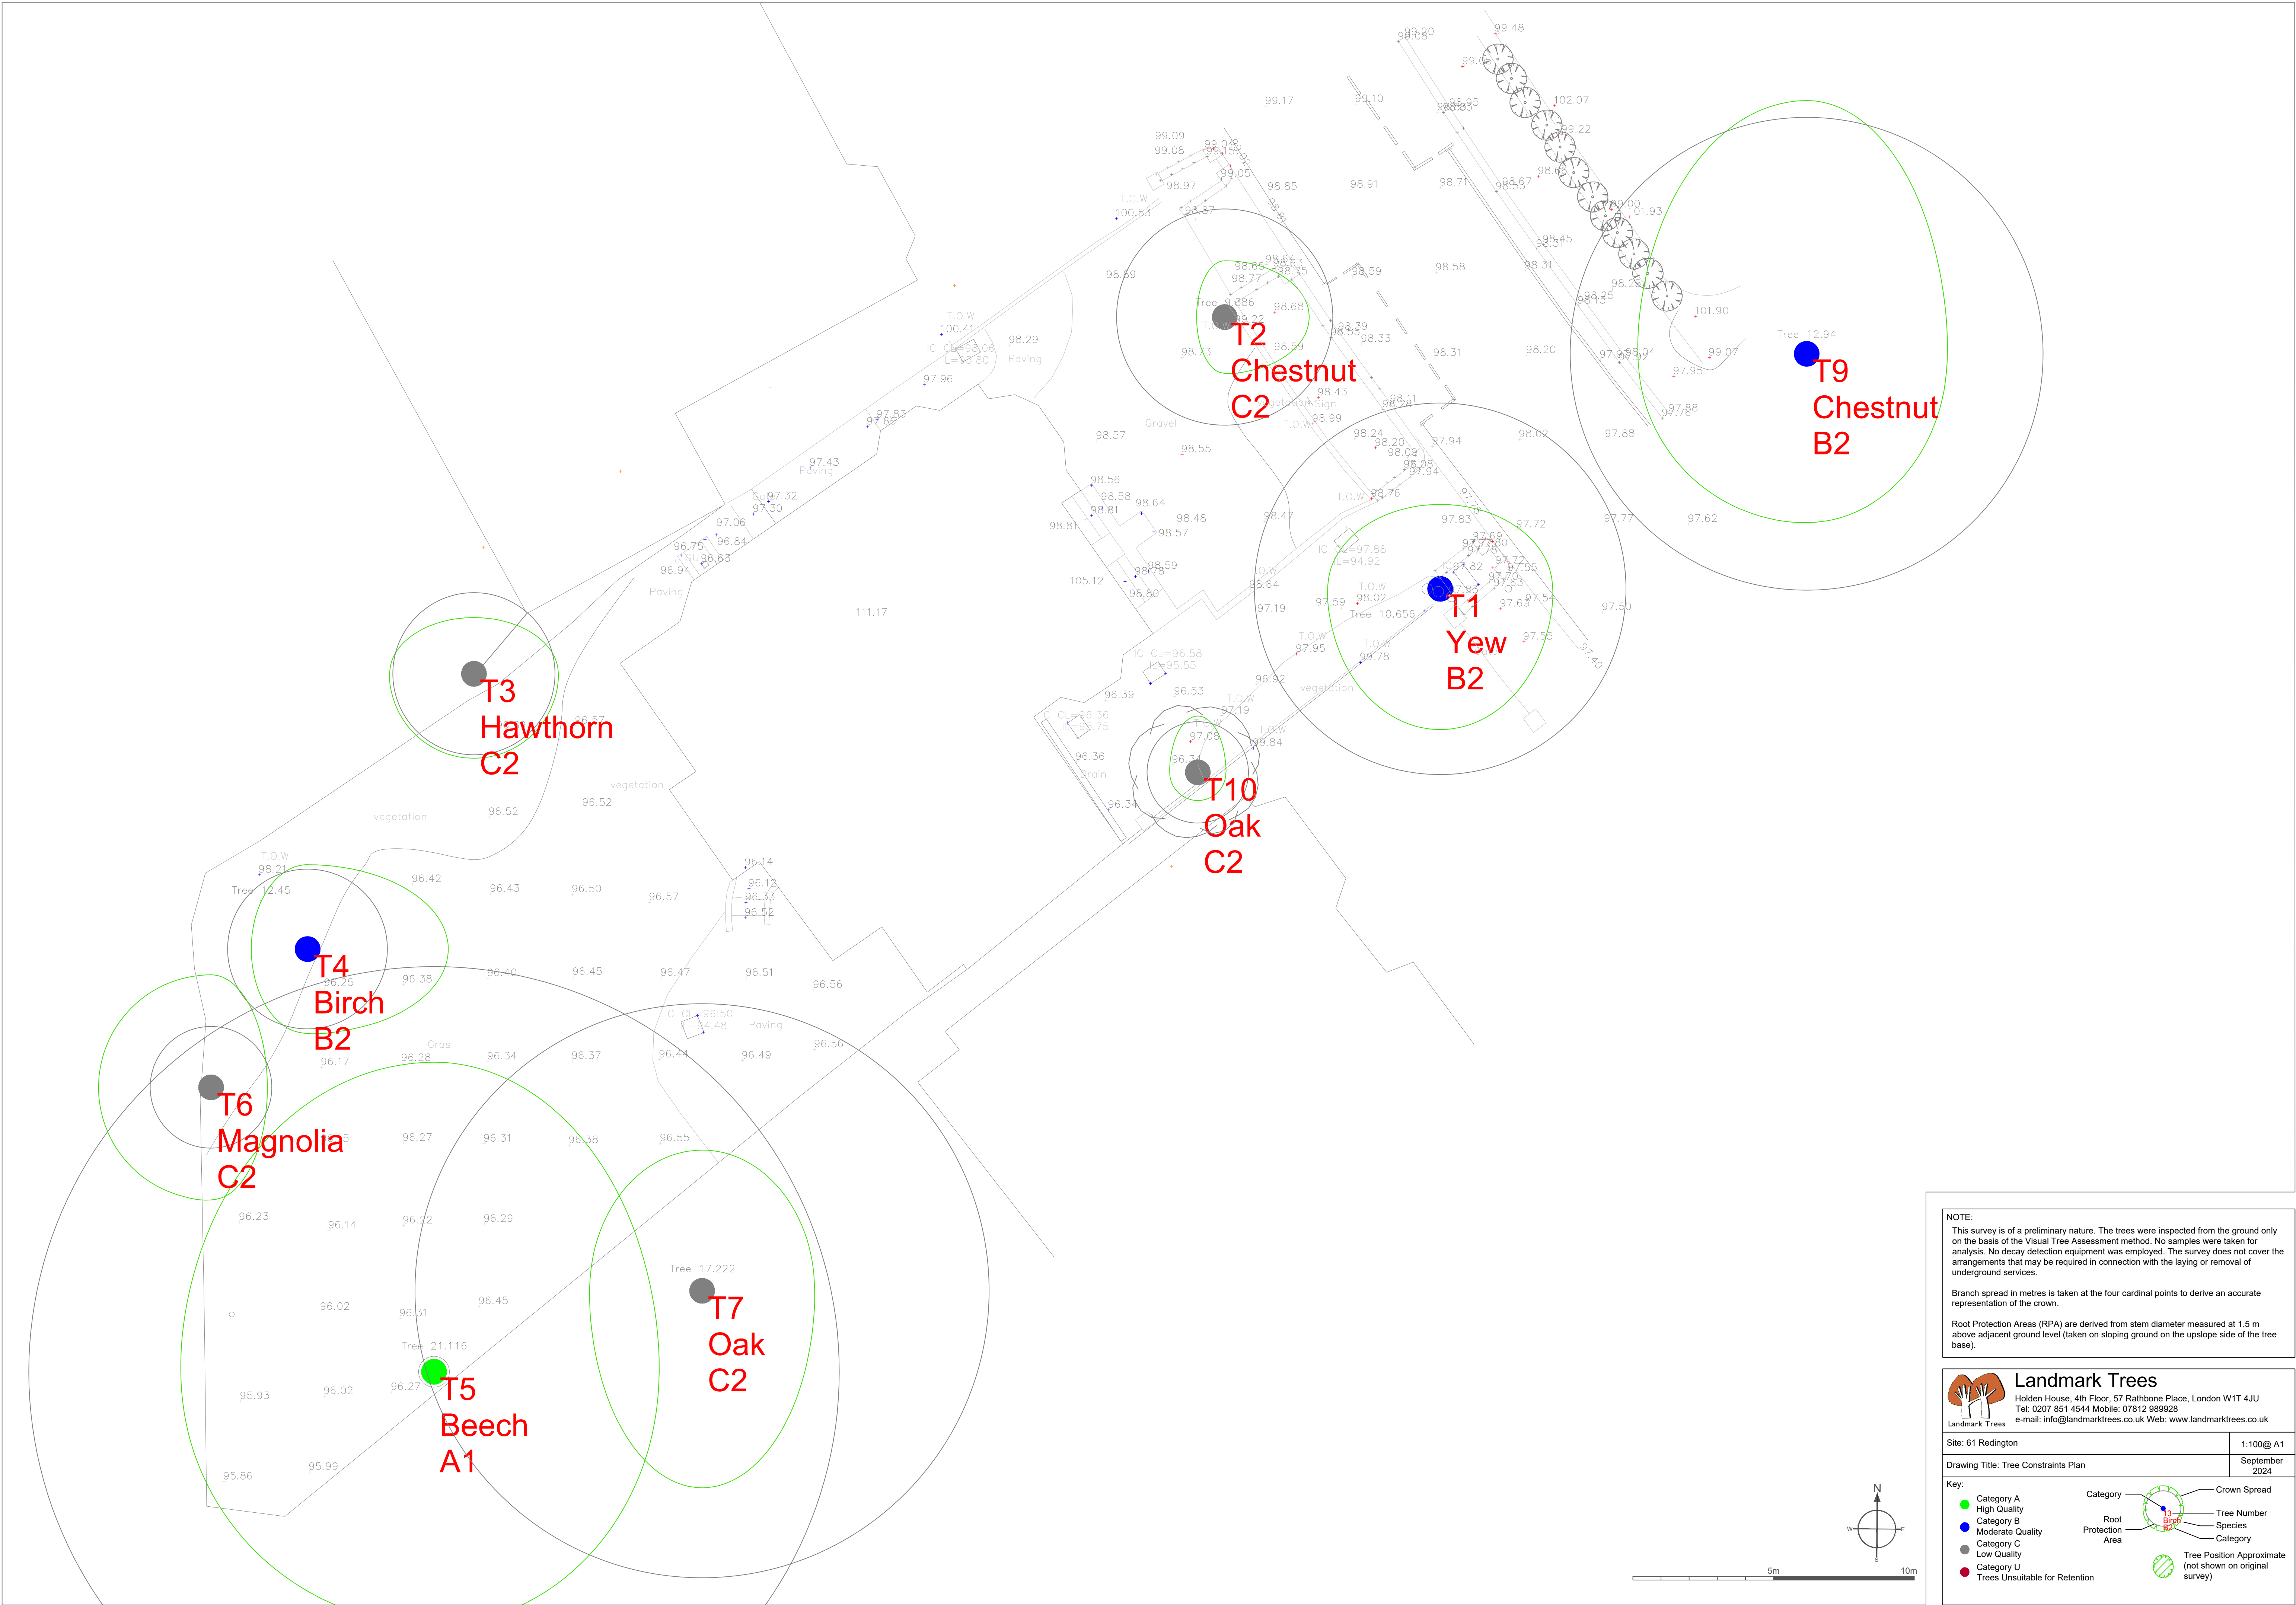


**NOTE:**

This survey is of a preliminary nature. The trees were inspected from the ground only on the basis of the Visual Tree Assessment method. No samples were taken for analysis. No decay detection equipment was employed. The survey does not cover the arrangements that may be required in connection with the laying or removal of underground services.

Branch spread in metres is taken at the four cardinal points to derive an accurate representation of the crown.

Root Protection Areas (RPA) are derived from stem diameter measured at 1.5 m above adjacent ground level (taken on sloping ground on the upslope side of the tree base).



**Landmark Trees**  
Holden House, 4th Floor, 57 Rathbone Place, London W1T 4JU  
Tel: 0207 851 4544 Mobile: 07812 989928  
e-mail: [info@landmarktrees.co.uk](mailto:info@landmarktrees.co.uk) Web: [www.landmarktrees.co.uk](http://www.landmarktrees.co.uk)

Site: 61 Redington	1:100@ A1
Drawing Title: Tree Constraints Plan	
September 2024	

**Key:**

- Category A High Quality
- Category B Moderate Quality
- Category C Low Quality
- Category U Trees Unsuitable for Retention

Category

Root Protection Area

Crown Spread

Tree Number

Species


Category

Tree Position Approximate (not shown on original survey)

**PLAN 2****ARBORICULTURAL IMPACT ASSESSMENT PLAN (S)**


- i. Ground Floor



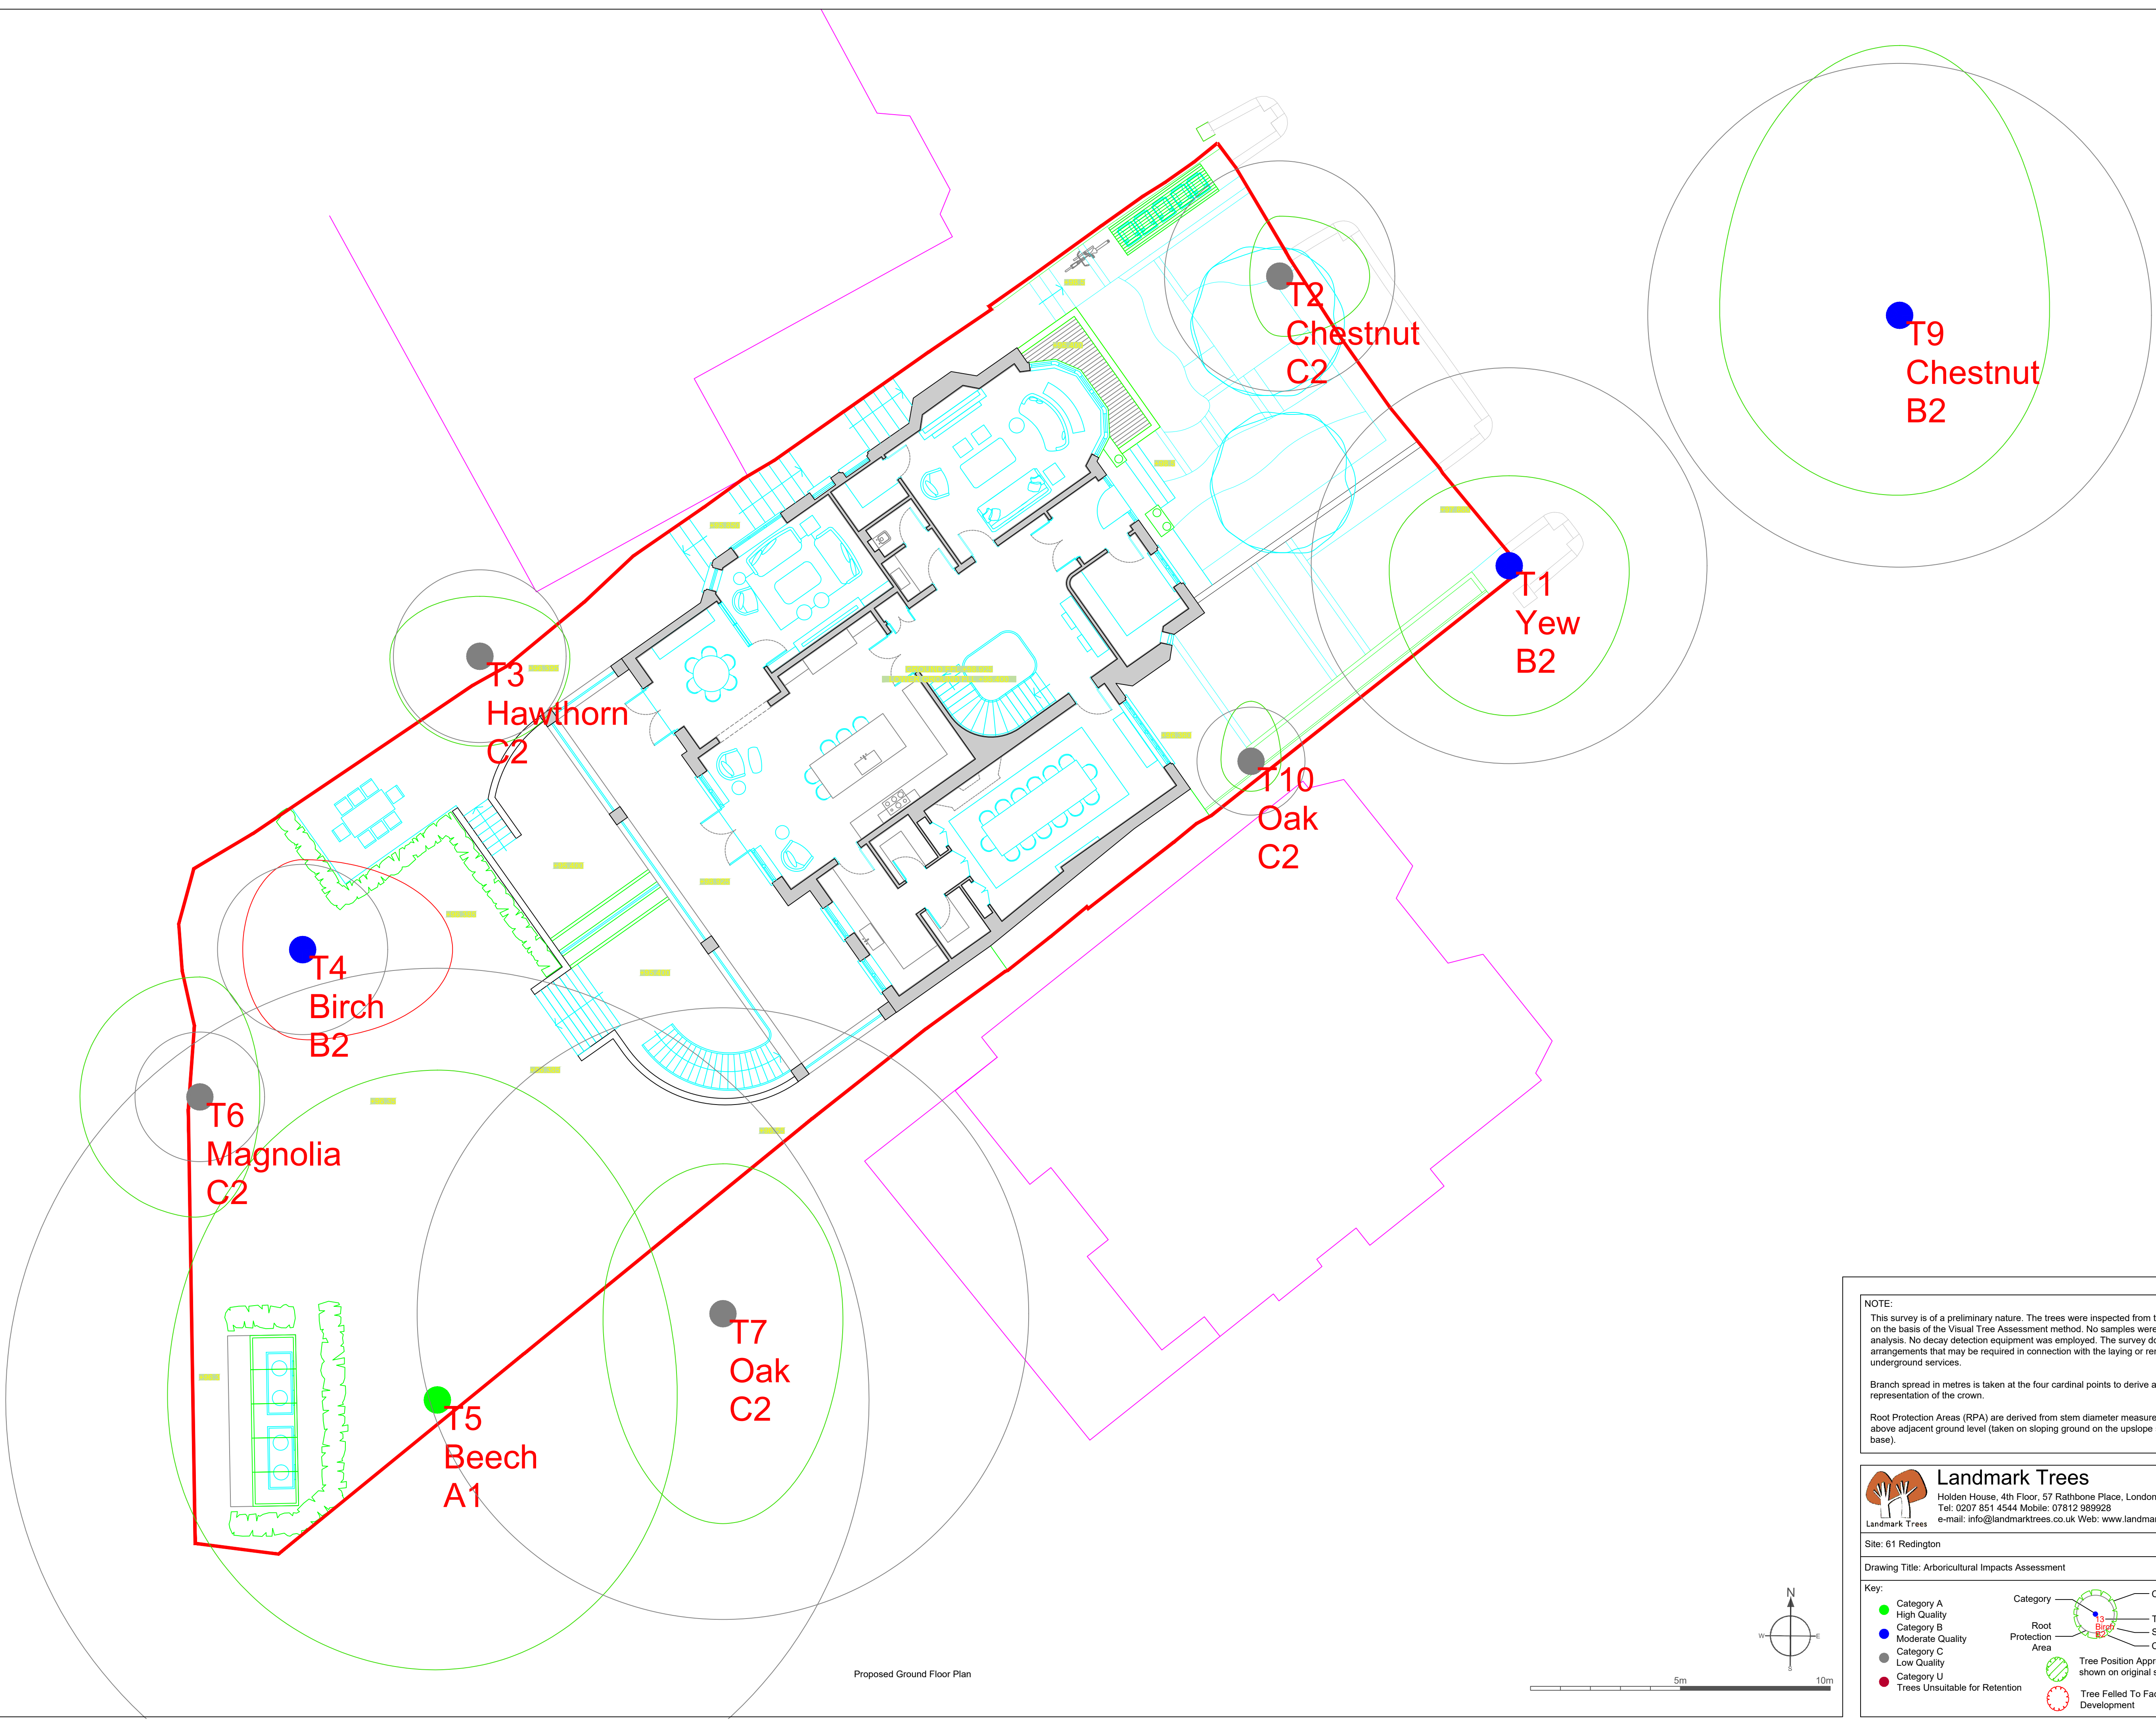

Proposed Ground Floor Plan

**NOTE:**  
This survey is of a preliminary nature. The trees were inspected from the ground only on the basis of the Visual Tree Assessment method. No samples were taken for analysis. No decay detection equipment was employed. The survey does not cover the arrangements that may be required in connection with the laying or removal of underground services.  
Branch spread in metres is taken at the four cardinal points to derive an accurate representation of the crown.  
Root Protection Areas (RPA) are derived from stem diameter measured at 1.5 m above adjacent ground level (taken on sloping ground on the upslope side of the tree base).



**Landmark Trees**  
Holden House, 4th Floor, 57 Rathbone Place, London W1T 4JU  
Tel: 0207 851 4544 Mobile: 07812 98928  
e-mail: [info@landmarktrees.co.uk](mailto:info@landmarktrees.co.uk) Web: [www.landmarktrees.co.uk](http://www.landmarktrees.co.uk)

Site: 61 Redington	1:100@ A1
Drawing Title: Arboricultural Impacts Assessment	
September 2024	

**Key:**



- Category A High Quality
- Category B Moderate Quality
- Category C Low Quality
- Category U Trees Unsuitable for Retention

- Tree Number
- Species
- Category
- Tree Position Approximate (not shown on original survey)
- Tree Felled To Facilitate Development

**PLAN 3**

**OUTLINE TREE PROTECTION PLAN**



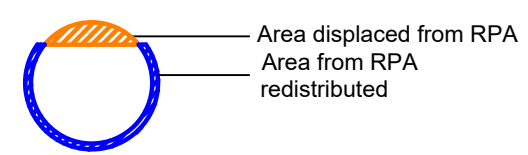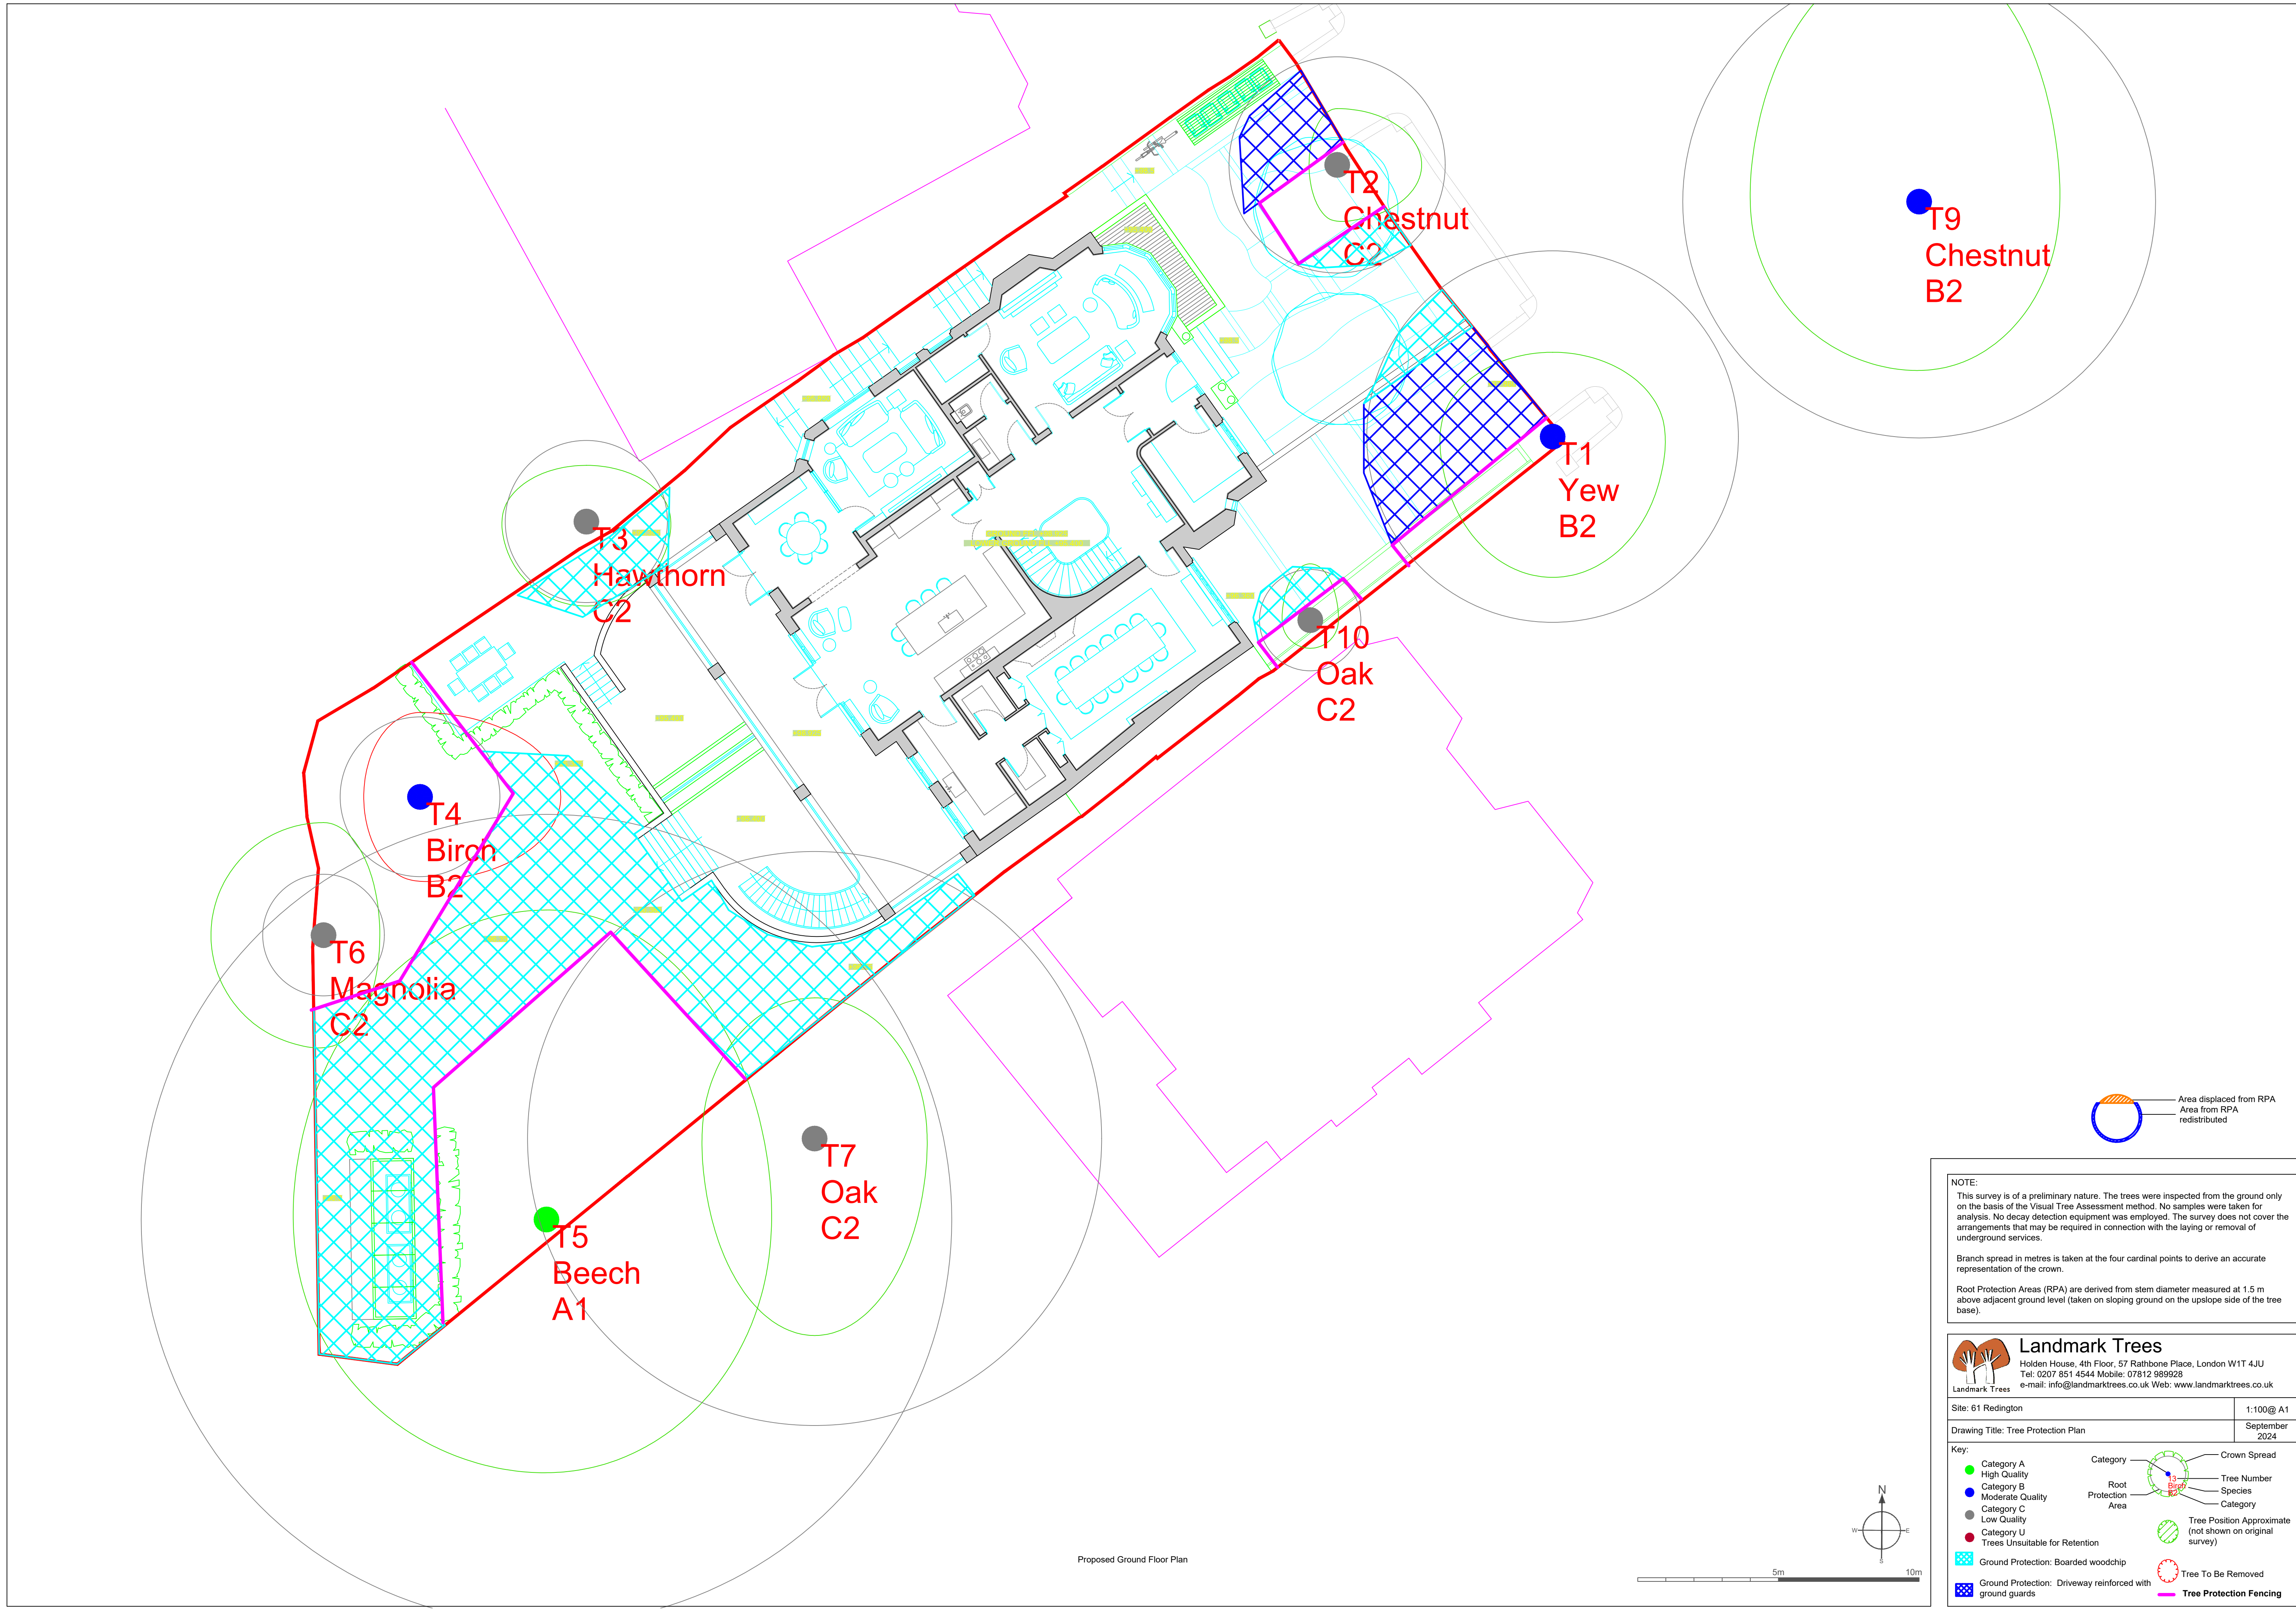

**NOTE:**  
This survey is of a preliminary nature. The trees were inspected from the ground only on the basis of the Visual Tree Assessment method. No samples were taken for analysis. No decay detection equipment was employed. The survey does not cover the arrangements that may be required in connection with the laying or removal of underground services.  
  
Branch spread in metres is taken at the four cardinal points to derive an accurate representation of the crown.  
  
Root Protection Areas (RPA) are derived from stem diameter measured at 1.5 m above adjacent ground level (taken on sloping ground on the upslope side of the tree base).

**Landmark Trees**  
Holden House, 4th Floor, 57 Rathbone Place, London W1T 4JU  
Tel: 0207 851 4544 Mobile: 07812 989028  
e-mail: [info@landmarktrees.co.uk](mailto:info@landmarktrees.co.uk) Web: [www.landmarktrees.co.uk](http://www.landmarktrees.co.uk)

Site: 61 Redington	1:100@ A1
Drawing Title: Tree Protection Plan	September 2024

**Key:**

- Category A High Quality
- Category B Moderate Quality
- Category C Low Quality
- Category U Trees Unsuitable for Retention

Ground Protection: Boarded woodchip

Ground Protection: Driveway reinforced with ground guards

**Category**

Crown Spread

Tree Number

Species

Category

Tree Position Approximate (not shown on original survey)

Tree To Be Removed

Tree Protection Fencing

Proposed Ground Floor Plan

