


GENERAL NOTES:

1. ALL DIMENSIONS AND LEVELS SHALL BE CHECKED ON SITE PRIOR TO CONSTRUCTION WORK COMMENCING.

- 2. ALL LANDSCAPE DRAWINGS TO BE READ IN CONJUNCTION WITH ALL RELEVANT ENGINEER'S AND ARCHITECT'S DRAWINGS AND
- SPECIFICATIONS.
 3. ALL DRAWINGS TO BE READ IN CONJUNCTION WITH THE LANDSCAPE
- SPECIFICATION.
 4. ANY DISCREPANCY CONCERNING THE DRAWINGS SHOULD BE
- REFERED TO THE CA IMMEDIATELY. 5. ALL DIMENSIONS IN MILLIMETRES UNLESS NOTED OTHERWISE
- ALL LEVELS IN METRES.
- DO NOT SCALE OFF THIS DRAWING. 8. EXISTING SERVICE ALIGNMENTS SHALL BE CHECKED ON SITE BY THE CONTRACTOR PRIOR TO CONSTRUCTION WORK COMMENCING.

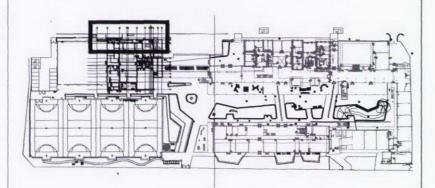

Detail Location Plan

LEGEND:

- 1. Precast concrete steps with Gradus contrasting strips. Refer to specification clause E50 42
- 2. 400 x 400 mm x 65mm Charcon Appalachian paviors laid on mortar bed (colour charcoal). Refer to specification clause Q25 215.
- Concrete flag paving to match and tie in to existing footpath paving and back of kerb.
- 4. Brick faced retaining wall with precast concrete coping to match steps. Brick facing to match canopy column cladding. Brick courses to tie in with canopy cladding. Refer to architects specification for brick and mortar details. For precast coping refer to specification clause E50 43.
- 5. Brushed Stainless Steel Handrail to specification clause Z11 60. Contractor to submit shop drawings for
- approval. Handrail to comply to Part M Building Regs. 6. Door barriers to architects details. Fixing to concrete
- slab to be hidden below paving finishes. 7. 400mm wide tactile paving strip to bottom of steps to specification clause Q25 220. Bedding and make up to
- engineers details and specification. 8. Brick clad column to Sports Hall entrance canopy to architect's details.
- 9. Recessed manhole cover to take tactile paving units. Location and structural details to engineers details and specification.
- 10. Brushed stainless steel Sheffield cycle stands. To be fixed to concrete footing below paving finishes, footing to engineers details. Refer to specification clause Q50 210. 11. ACO multidrain channel drain at door threshold and
- stainless steel drain grating to specification clause Q10 270 12. 50 x 250 x 915 Precast Concrete Pin Kerb Edge Laid Flush to retain flexibly laid flag paving. To specification

base of ramp and steps to engineers details. Perforated

clause Q10 113 13. 400 x 400 mm x 65mm Charcon Appalachian paviors laid on flexible bed (colour grey). Refer to specification

NOTES:

clause Q25 216.

All structural design to engineers details and specification.

All proposed levels are based on existing levels are taken from BAM site survey provided 18.05.2011. The assumed finished level for the ground floor of the sports hall building is 21.56 AOD. Any discrepency in regard to building FFLs and existing kerb / pavement levels must be immediately notified to the landscape architect.

Changes for Revision:

i) Tactile paving at top of steps omitted.

ii) Handrail locations amended.



ORIGINAL DRAWING SIZE 841 X 594mm

community school

SPORTS HALL ENTRANCE & CANOPY DETAILED PLAN Canden date 30.03.2011 drawing no scale 1:50@ A1 SCCS_LAND_3006

18.06.2011

17.10.2011 Issue for Construction

13.09.2011 Issue for Construction

30.06.2011 Issue for Construction

06.05.2011 Issue for Construction

Issue for Construction

