



MSZ-GE25VA

Inverter Heat Pump

R410A Wall Mounted System

This model has been completely redesigned and features the new Catechin filter system. It offers industry leading noise levels and has a distinctively styled front panel that not only looks appealing but also helps make the cleaning of the unit easier.

- **Anti-Allergy Enzyme Filter is optional**



Pictures not to scale

Product Details


MSZ-GE25VA Indoor Unit	
Capacity (kW):	
Heating (Nominal) (Low - High)	3.20 (1.30 - 4.50)
Cooling (Nominal) (Low - High)	2.50 (1.10 - 3.50)
Heating (UK) (Low - High)	2.65 (1.10 - 3.75)
Cooling (UK) (Low - High)	2.50 (1.10 - 3.45)
SHF R410A (Nominal)	0.96
COP / EER (Nominal)	4.57 / 4.59
Energy Label Heating / Cooling	A / A
Width - mm	798
Depth - mm	232
Height - mm	295
Weight - kg	10
Airflow (m ³ /min) (Heating /Cooling) - Lo-Mi1-Mi2-Hi-SupHi	4.1-4.8-6.6-9.1-11.5 / 4.1-4.8-6.7-9.1-11.3
Noise (dBA) (Heating /Cooling) - Lo-Mi1-Mi2-Hi-SupHi	19-21-29-36-42 / 19-21-29-36-42
Pipe Size Gas mm (in)	9.52 (3/8)
Pipe Size Liquid mm (in)	6.35 (1/4)
Electrical Supply	Fed by Outdoor Unit
Phase	Single
Fuse Rating (BS88) - HRC (A)	6
Interconnecting Cable No. Cores	4

MUZ-GE25VA Outdoor Unit	
Width - mm	800
Depth - mm	285
Height - mm	550
Weight - kg	30
Noise (dBA) (Heating /Cooling)	48 / 47
Electrical Supply	220-240v, 50Hz
Phase	Single
Fuse Rating (BS88) - HRC (A)	10
SystemPower Input (kW) - Heating (Nominal)	0.7
SystemPower Input (kW) - Cooling (Nominal)	0.545
SystemPower Input (kW) - Heating (UK)	0.637
SystemPower Input (kW) - Cooling (UK)	0.436
SystemRunning Current (A) - Heating / Cooling	3.7 / 2.9
Mains Cable No. Cores	3
Max Pipe Length (m)	20
Max Height Difference (m)	12
Charge (kg) - 7m	0.8


Dimensions

MSZ-GE25VA


Upper View >



Front View >




Side View >




MUZ-GE25VA


Upper View >

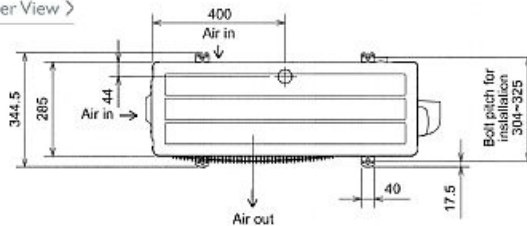

Front View >

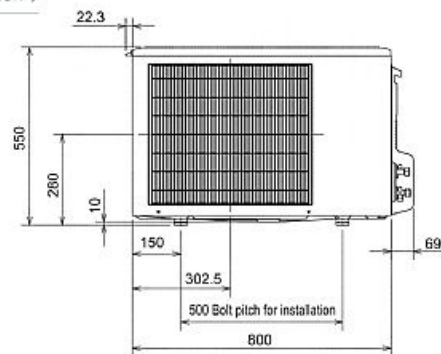

Side View >



Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: <http://www.mitsubishielectric.co.uk/aircon>

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

Tel:
Fax:

