



INVERTER

FTKS-F / RKS-F

Wall Mounted Unit



ARC433B71




FTKS-F



RKS60F

- **Home Leave operation:** in case of extended absence, this function helps to save energy and protects from frost. The function automatically keeps the room temperature at a specified favourite comfort level by switching to heating when it reaches the minimum level and to cooling when it reaches the maximum level.
- **Night set mode:** if the timer is switched on, the air conditioner will automatically set the temperature – an increase of 0.5°C when cooling and a decrease of 2°C when heating – to prevent the room from rapidly cooling or heating for more comfort during sleeping.
- Movement sensor saves power consumption in unoccupied rooms
- Dual air discharge flow for better air distribution
- Titanium apatite photocatalytic air purification filter
- Indoor / outdoor unit silent operation
- Night quiet mode (only in multi application and cooling only mode)
- Connection to multi outdoor possible

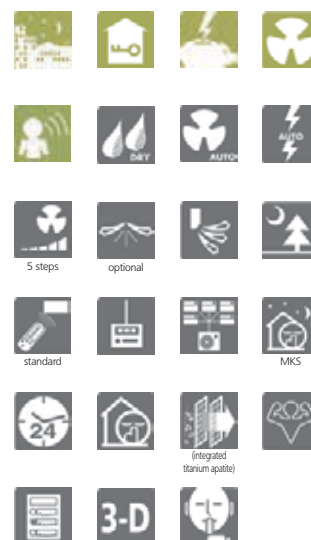

COOLING ONLY				INVERTER	
Indoor Units				FTKS60FV1B	FTKS71FV1B
Nominal Capacity	Cooling capacity	Minimum	kW	1.7	2.3
		Standard	kW	6.0	7.1
		Maximum	kW	6.7	8.5
EER	Nominal			3.02	3.02
Annual energy consumption			kWh	995	1175
Energy Label	cooling			B	B
Dimensions (Height x Width x Depth)			mm	290x1050x238	290x1050x238
Weight			kg	12	12
Air Flow Rate	Cooling	H/M/L/SL	m³/min	16.2 / 13.6 / 11.4 / 10.2	17.4 / 14.6 / 11.6 / 10.6
Sound Power	Cooling	Medium	dBA	61	62
Sound Pressure	Cooling	H/M/L/SL	dBA	45 / 41 / 36 / 33	46 / 42 / 37 / 34
Refrigerant			Type	R-410A	R-410A
Power Supply				1~/220-240V/50Hz	1~/220-240V/50Hz

Outdoor Unit				RKS60F2V1B	RKS71FV1B
Dimensions (Height x Width x Depth)			mm	735x825x300	770x900x320
Weight			kg	47	71
Sound pressure level		H/SL	dBA	49 / 46	52 / 49
Sound power level		H	dBA	63	66
Operation Range	Cooling	Min~Max	°CDB	-10~46	-10~46
Refrigerant			Type	R-410A	R-410A
Power Supply				1~/220-240V/50Hz	1~/220-240V/50Hz
Piping connections	Liquid (OD)/Gas/Drain		mm	6.35 / 12.7 / 18	6.35 / 15.9 / 18
Piping Length (Maximum)			m	30	30
Max Installation Height Difference			m	20	20



FTXS-F / RXS-F

Wall Mounted Unit



ARC433B70



FTXS-F



RXS60F

- Home Leave operation: in case of extended absence, this function helps to save energy and protects from frost. The function automatically keeps the room temperature at a specified favourite comfort level by switching to heating when it reaches the minimum level and to cooling when it reaches the maximum level.
- Night set mode: if the timer is switched on, the air conditioner will automatically set the temperature – an increase of 0.5°C when cooling and a decrease of 2°C when heating – to prevent the room from rapidly cooling or heating for more comfort during sleeping.
- Movement sensor saves power consumption in unoccupied rooms
- Dual air discharge flow for better air distribution
- Titanium apatite photocatalytic air purification filter
- Indoor / outdoor unit silent operation
- Night quiet mode (only in multi application and cooling only mode)
- Connection to multi outdoor possible



HEAT PUMP				INVER TER	
Indoor Units				FTXS60FV1B	FTXS71FV1B
Nominal Capacity	Cooling capacity	Minimum	kW	1.7	2.3
		Standard	kW	6.0	7.1
		Maximum	kW	6.7	8.5
	Heating capacity	Minimum	kW	1.7	2.3
		Standard	kW	7.0	8.2
		Maximum	kW	8.0	10.2
EER / COP	Cooling / Heating			3.02 / 3.43	3.02 / 3.22
Annual energy consumption			kWh	995	1175
Energy Label	cooling / heating			B / B	B / C
Dimensions	(Height x Width x Depth)		mm	290x1050x238	290x1050x238
Weight			kg	12	12
Air Flow Rate	Cooling	H/M/L/SL	m³/min	16.2 / 13.6 / 11.4 / 10.2	17.4 / 14.6 / 11.6 / 10.6
	Heating	H/M/L/SL	m³/min	17.4 / 15.1 / 12.7 / 11.4	19.7 / 16.9 / 14.3 / 12.7
Sound Power	Cooling	Medium	dBA	61	62
	Heating	Medium	dBA	60	62
Sound Pressure	Cooling	H/M/L/SL	dBA	45 / 41 / 36 / 33	46 / 42 / 37 / 34
	Heating	H/M/L/SL	dBA	44 / 40 / 35 / 32	46 / 42 / 37 / 34
Refrigerant			Type	R-410A	R-410A
Power Supply				1~/220-240V/50Hz	1~/220-240V/50Hz

Outdoor Unit				RXS60F2V1B	RXS71FV1B
Dimensions	(Height x Width x Depth)			735x825x300	770x900x320
Weight				48	71
Sound pressure level	Cooling	H/SL	dBA	49 / 46	52 / 49
	Heating	H/SL	dBA	49 / 46	52 / 49
Sound power level	Cooling	H	dBA	63	66
Operation Range	Cooling	Min~Max	°CDB	-10~46	-10~46
	Heating	Min~Max	°CWB	-15~18	-15~18
Refrigerant	Type			R-410A	R-410A
Power Supply				1~/220-240V/50Hz	1~/220-240V/50Hz
Piping connections	Liquid (OD)/Gas/Drain			6.35 / 12.7 / 18	6.35 / 15.9 / 18
Piping Length (Maximum)				30	30
Max Installation Height Difference				20	20