
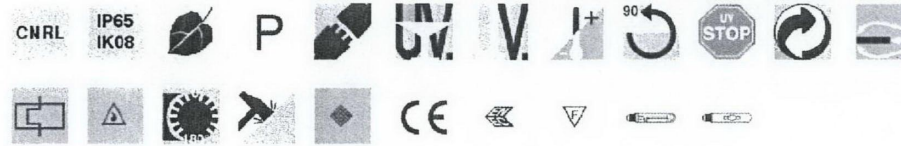
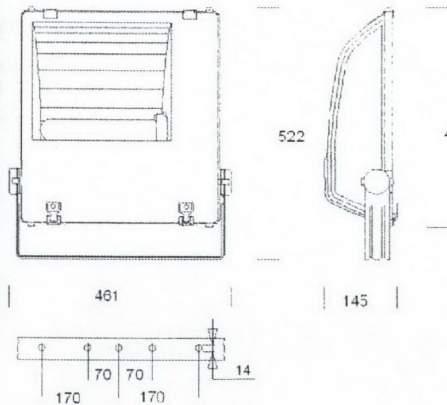


1803 Rodio 3 asymmetric

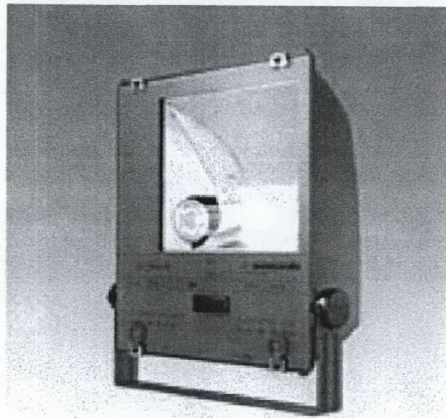

Code	px no. pack.	Gear	Kg	Watt	Base	Colour	Dimensions	Total Installed Power Capacity	Lamps
414715-00	1	CNRL	10.50	SAP-T150	E40	graphite	522x461x145	167.89	2000k - 15000lm - 4
414716-00	1	CNRL	11.50	SAP-T250	E40	graphite	522x461x145	275.07	2000k - 27500lm - 4
414717-00	1	CNRL	13.20	SAP-T400	E40	graphite	522x461x145	426.5	2000k - 50000lm - 4
414718-00	1	CNRL	10.60	JM-T250	E40	graphite	522x461x145	268	4500k - 19000lm - 2B
414719-00	1	CNRL	11.30	JM-T400	E40	graphite	522x461x145	426	4300k - 35000lm - 65

Housing without frame: Die-cast aluminium with cooling fins.

Reflector: Asymmetric; made of 2µ thick 99.85 anodised and polished hammered aluminium.

Diffuser: Tempered glass 5 mm thick, resistant to impact and thermal shock (UNI EN 12150-1:2001 tests).

Coating: Graphite grey polyester powder coating applied, resistant to corrosive and saline environments.

Lampholder: Ceramic with silver-plated contacts

Electric gear: 230V/50Hz power supply with heat protection. Flexible wire terminated with admiralty brass clamps, fibreglass braid insulation, cross section: 1sqmm. 2P+T terminal block (maximum allowed lead cross-section: 4sqmm).

Equipment: Silicone rubber gasket. Fibreglass nylon cable gland, Ø 1/2 " gas. Ø 1/2inch gas. Corrosion and gripping resistant retained stainless steel screws. Steel bracket with protractor scale. The front frame opens on hinges (no tools required) and stays attached to the fixture housing. Equipped with air circulation valve. Supplied with knife switch. Latches with safety screw.

Regulations: Manufactured in compliance with EN60598 - CEI 34 - 21 standards. The level of protection complies with the EN60529 standard.

On request, asymmetric reflector 55°

CLIFTON HOUSE, FOSTON RD
LIGHTING SPECIFICATION
DRAWING NO BSB/EOS/007.