



THIRD FLOOR PLAN



BTHROOM 2 STRUCTURE / SOIL PIPES

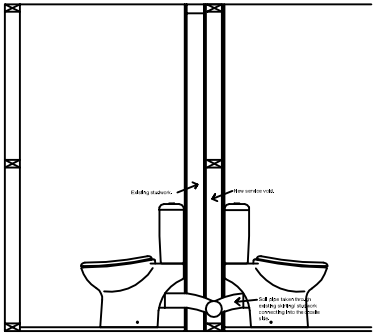

BTHROOM 2 SECTION

DO NOT SCALE FROM THESE DRAWINGS. USE FIGURED DIMENSIONS ONLY.

Category LD2 grade A automatic fire alarm and detector system to serve all areas connected into Landlords supply within surface mounted mini trunking to comply with BS5839 Part 6, 2004. Upon completion the system should be tested, commissioned and certified in accordance with BS5839 Part 1, 2002.

Emergency escape lighting system complying with BS5266-1:1999

Smoke detectors and all associated cabling to meet BS5839

Provide and install heat detector in accordance with BS5446-2 all associated cabling

Heat alarms to meet BS5446-2

Control and indicating equipment to comply with BS EN54-2

HEATING: Provide and install Dimplex plat panel radiators within each room including duo heat central controllers position to be confirmed.

Provide and install portable fire blankets to kitchen area to comply with BS EN1869:1997

Floors: Existing timber floor boards removed numbered set aside and refixed upon completion. Install Gypfloor silent allowing for 100mm Isowool insulation installed between joists and 12.5mm Glasroc multiboard resting won 100mm x 12.5mm Glasroc multiboard strips with Gyproc plank sitting on Gyframe SIF floor channels re-install previously set aside floorboards.

New Partitions: Wall finishes as specification on combination of 12.5mm fireline and plaster board skim finished and fixed to timber studs @ 400mm max c/cs, provision to be made for insertion of 50mm Isowool accoustic insulation quilt between studding.

Ceilings: Casoline MF ceiling lining incorporating gypframe accoustic hangers suspended beneath joists. Line with 2 layers of 15mm Gyproc sound bloc and provide skim finish coat of plaster, leave ready to receive decorations.

Electrical: Contractor to allow for new electrical installation to meet current regulations. All new electrical work to comply with Part P, of approved documents and a satisfactory installation certificate is provided on completion of work.

Provision to be made for mechanical extract ventilation to new bathrooms room Mechanical extract to achieve min extract rate of 30ltrs/Sec.

Escape lighting in accordance with BS 5266:Part 1. Fire/smoke detectors in accordance with BS 5839:Part 1 2002.

Joinery: Contractor to allow for new doors and linings as indicated on plan. Doors to be hund within SW linings width to suit new partitions. Contractor to allow for SW architraves to match and SW skirtings to match.

- Automatic heat detection
- Dimplex DuoHeat Radiator
- Automatic Smoke Detection
- Call Point
- Control Panel
- Emergency Lighting
- K
- DIMPLEX DuoHeat Radiator (Refer to call)
- S
- T
- U
- E

CARLILE ASSOCIATES

BUILDING SURVEYING AND ARCHITECTURAL SERVICES

ALTO HOUSE

29/30 NEWBURY STREET

LONDON EC1A 7HZ

Tel: 020 7796 3050 Fax: 020 7796 3051

project:

67 GRAYS INN ROAD

LONDON, WC1X 8TL

PROPOSED THIRD FLOOR PLAN

scale: 1:50 @ A3

date: April 2009

drawn by: FAK

dwg no: 3959/505A