
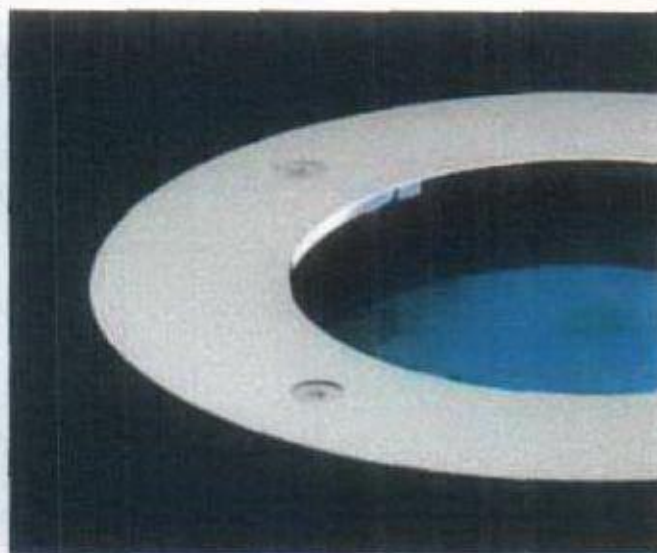


SARUM CHASE – EXTERNAL LIGHTING March 2010

External up – lights A, D and M fittings for the garden.

fittings are either in the stone floor or flower beds.

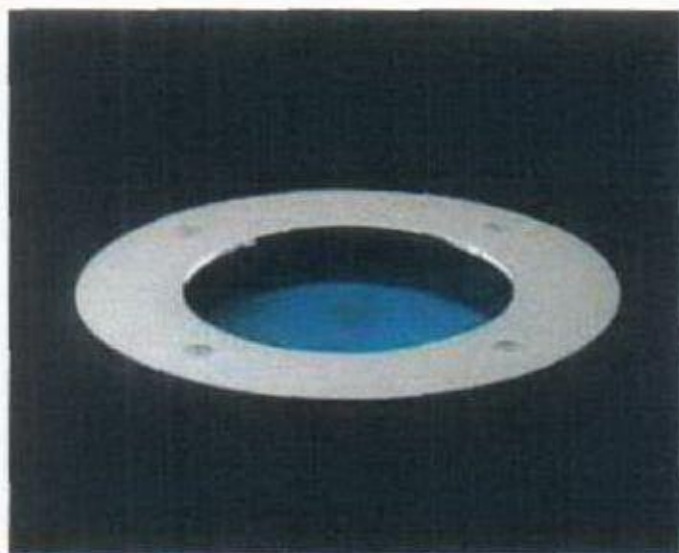

weblink

2145

Design

Louis Poulsen Lighting A/S

Concept

IPR10 provides accent illumination from a compact fixture using a range of reflectors and lamps.

Finish

Stainless steel.

Material

Glass: Toughened clear glass. Top plate: Marine grade 316 stainless steel. Housing: Die cast LM6 aluminium anodised. Gearbox: Die cast LM6 aluminium anodised. Gearbox lid: Die cast LM6 aluminium anodised. Junction box: Die cast LM6 aluminium anodised.

Mounting


Installation: Mounting in installation sleeve. Installation sleeve to be ordered separately. Control gear: Supplied with built-in control gear, prewired factory sealed complete with IP68 connector. Housing: Supplied prewired. Optional junction box: For deep sleeve only. For through wiring fitted with 2x M25 IP68 glands for Ø 13-18mm cable, and supplied with re-enterable type resin pack.

Weight

Max. 4kg.

Class

Ingress protection IP66, IP67, IP68. Electric shock protection I w. ground.

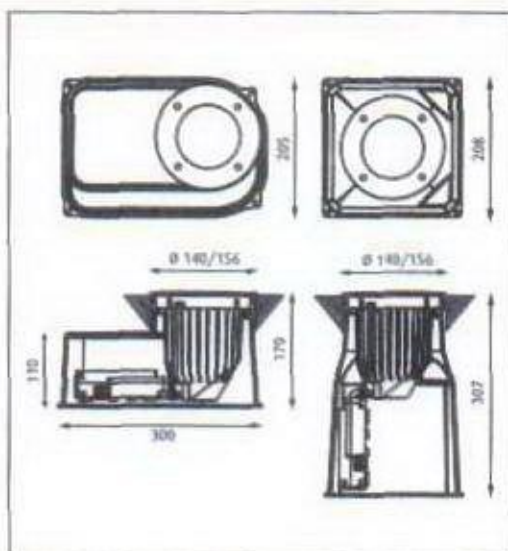

Product code	Dimensions	Light source	Finish	Class	Reflector
IPR10-A	Ø 140 FLUSH STRAIGHT Ø 156 RADIUS	1x20W HIT-TC-CE GU6.5 HF 1x20W HIT-TC-CE PGJ5 HF 1x20W/35W/50W QR-CB 51 HF 1x20W/35W/50W QT-ax 12 Clr. HF	STAINL. STEEL	I	8° 15° 30° 60°

Info notes:


Surface temperatures given by Louis Poulsen Lighting are all measured at 25°C ambient after 10 hours.



Page 209



Page 210

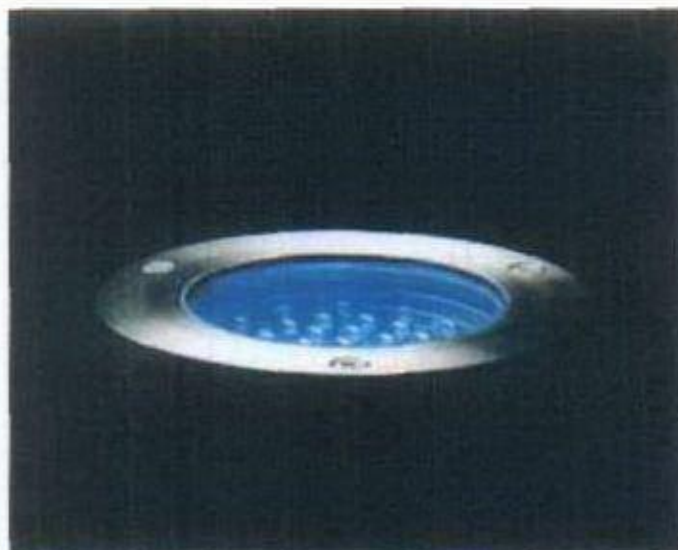

workbook
1504



Project page
262, 300

Georgia Aquarium, Atlanta, Georgia, USA. Architect: TVS Architects. Lighting designer: Quanta Thomas Associates, Inc. Electrical engineer: Sybil Hennessy Group, Inc. Photo: Gregory Campbell

Design
Louis Poulsen Lighting A/S

Concept
Nimbus Clear LED provides colour, accent and marker illumination, and sets scenes, creating drama and highlighting architectural features.

Finish
Stainless steel.

Material
Sleeve: Marine grade 316 stainless steel. Glass: Toughened clear glass. Top plate: Marine grade 316 stainless steel. Housing: Aluminium coloured, die cast LM6 aluminium.

Mounting
Sleeve: Mounting in optional installation sleeve. Installation sleeve to be ordered separately. Ø 125mm is mounted flush with the ground. Ø 150mm is mounted on the ground. Terminal block: 2x3x2.5mm². Cable entries: Standard: 1x M20 IP68 gland for Ø 6-12mm cable. DMX: 3x M20 IP68 glands for Ø 6-12mm cable. Inground: Suitable for mounting in wood, burial in earth/pea shingle, or cast into concrete.

Weight
Max. 2kg.

Class
Ingress protection IP67. Electric shock protection I w. ground.



Product code	Dimensions	Light source	Finish	Class	Lighting control
NIMBUS-A	Ø 125 STRAIGHT Ø 150 STRAIGHT Ø 150 REVELLED 130x130 STRAIGHT	28 LED Amber Nom. load SW 28 LED Blue Nom. load SW 28 LED Green Nom. load SW 28 LED Red Nom. load SW 28 LED White Nom. load SW	STAINL. STEEL	I	NONE DMX

Info notes:
DMX: Delivered in DMX controllable. Special DMX cables available from Louis Poulsen.
Please use Ø 150mm sleeve for both Ø 150mm and 130x130mm fittings.



Page 144

Page 215

Page 214

M FITTING

LUM – Technical Information

A discreet spotlight to enhance your values.



A: Benefits

- Mini swivelling waterproof spotlight.
- Use of high power LED.
- Pre-wired, easy to install and connect.

B: Application

- Architectural lighting.
- Buildings enhancer.
- Advertising signs.
- Billboards...



C: Product Description

- Aluminium body, hardened glass. Delivered with a 0,5 m cable.
- Equipped with GOLDEN DRAGON LED. Available in 5 LED colors : White (2700 K), blue, green, yellow and red.
- Use of watertight OT 3 W or OT 9 W control gear (not included).
- Series connection of up to 10 m on the secondary side.



PROFESSIONAL PRODUCTS / Luminaires / Outdoor / LED Fixtures / Small LED Floodlights / HYDROSTAR MICRO

HYDROSTAR MICRO 3 and 1 LED

A discreet spotlight to enhance your values.

HYDROSTAR floodlight technology allows flexible aiming for general purpose floodlighting applications. Very compact and narrow with the smallest dimensions in their category. Easy to use and maintain with many features for increased safety.




Product Benefits

- * Aluminium body, hardened glass. Delivered with a 0,5 m cable.
- * Equipped with GOLDEN DRAGON LED. Available in 5 LED colors : White (2700 K), blue, green, yellow and red.
- * Controlled by OT 3/190-240/350 E or OT 9/200-240/350 E (not included)



Product Description

- * lamp wattage: 0.8 W, 1.2 W, 2.4 W, 3.6 W
- * colour: anodized aluminium
- * diameter: 56 mm
- * length: 82 mm
- * height: 52 mm

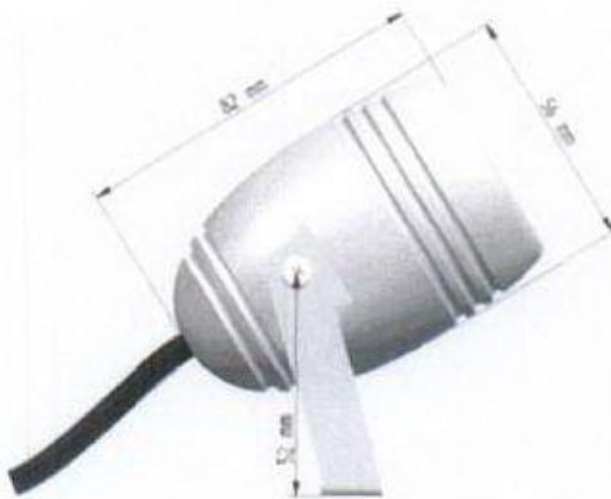

Additional information

- * Mini swivelling waterproof spotlight.

E: Logistic Data

Product Name	LED Color	EAN	Shipment Unit
HYDROSTAR MICRO 1 LED	White (2700 K)	4008321 153661	4x1
HYDROSTAR MICRO 1 LED	Red	4008321 153845	4x1
HYDROSTAR MICRO 1 LED	Yellow	4008321 153807	4x1
HYDROSTAR MICRO 1 LED	Green	4008321 153784	4x1
HYDROSTAR MICRO 1 LED	Blue	4008321 153722	4x1
HYDROSTAR MICRO 3 LED	White (2700 K)	4008321 153968	4x1
HYDROSTAR MICRO 3 LED	Red	4008321 154064	4x1
HYDROSTAR MICRO 3 LED	Yellow	4008321 154026	4x1
HYDROSTAR MICRO 3 LED	Green	4008321 154002	4x1
HYDROSTAR MICRO 3 LED	Blue	4008321 153962	4x1

Accessories

Product Name	EAN	Shipment Unit
OT 3/100-240/350 E IP 67	4008321 154835	4x1
OT 9/200-240/350 E IP 67	4008321 154859	4x1
RESIN BAG (80 ml)	4008321 153418	10x1

Focus on the accessories

OT 3/100-240/350 E

which contains :

- 1 control gear 100-240 V
- 1 casing
- 80 ml of filling resin



OT 9/200-240/350 E

which contains :

- 1 control gear 200-240 V
- 1 casing
- 80 ml of filling resin.

