





Dunboyne Elevation A (As B of Q)

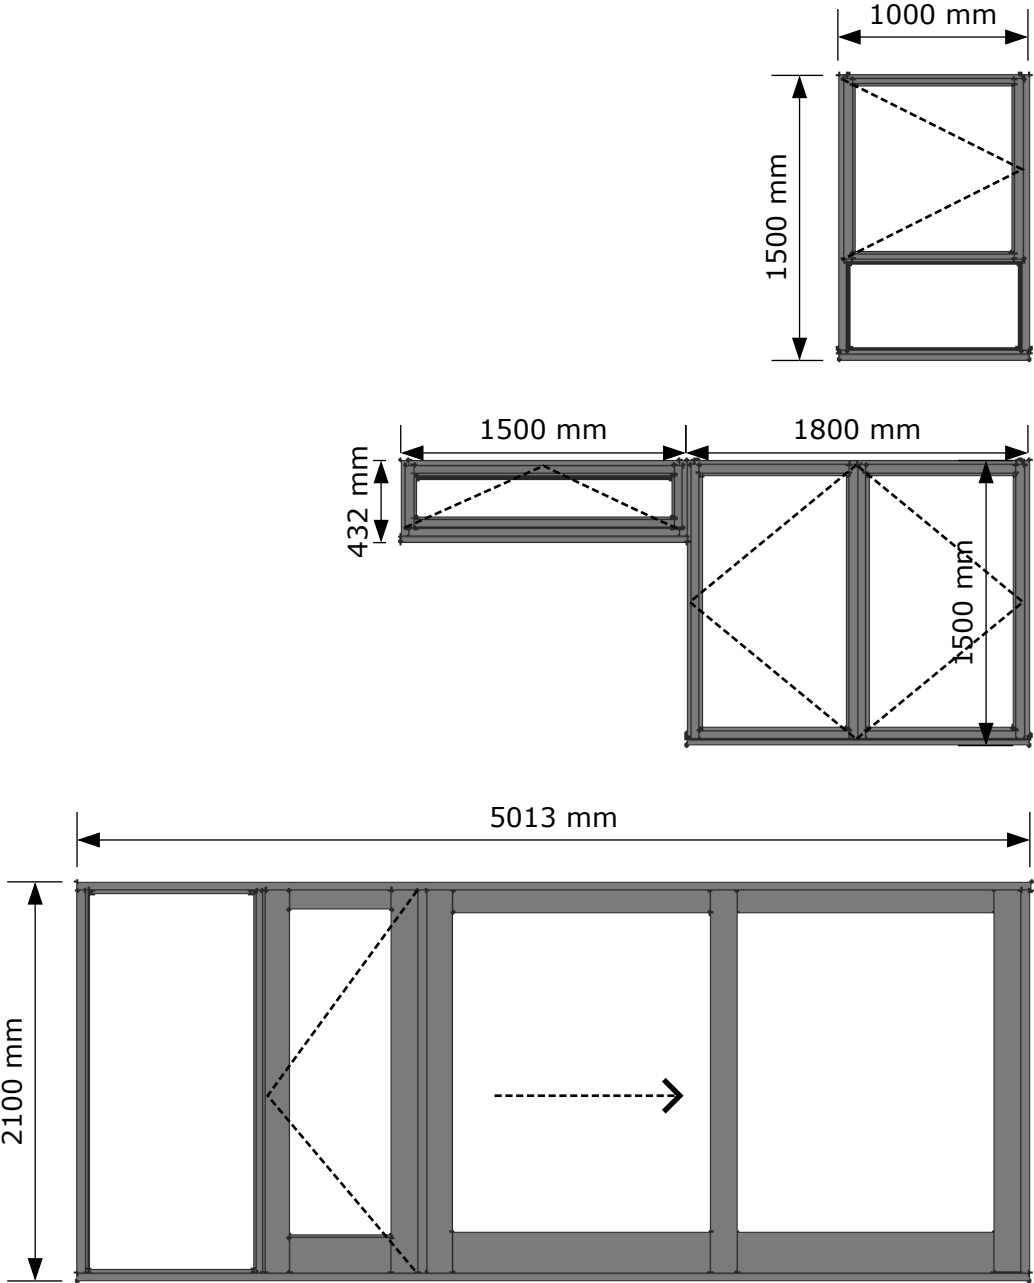


Dunboyne Elevation B (As B of Q)

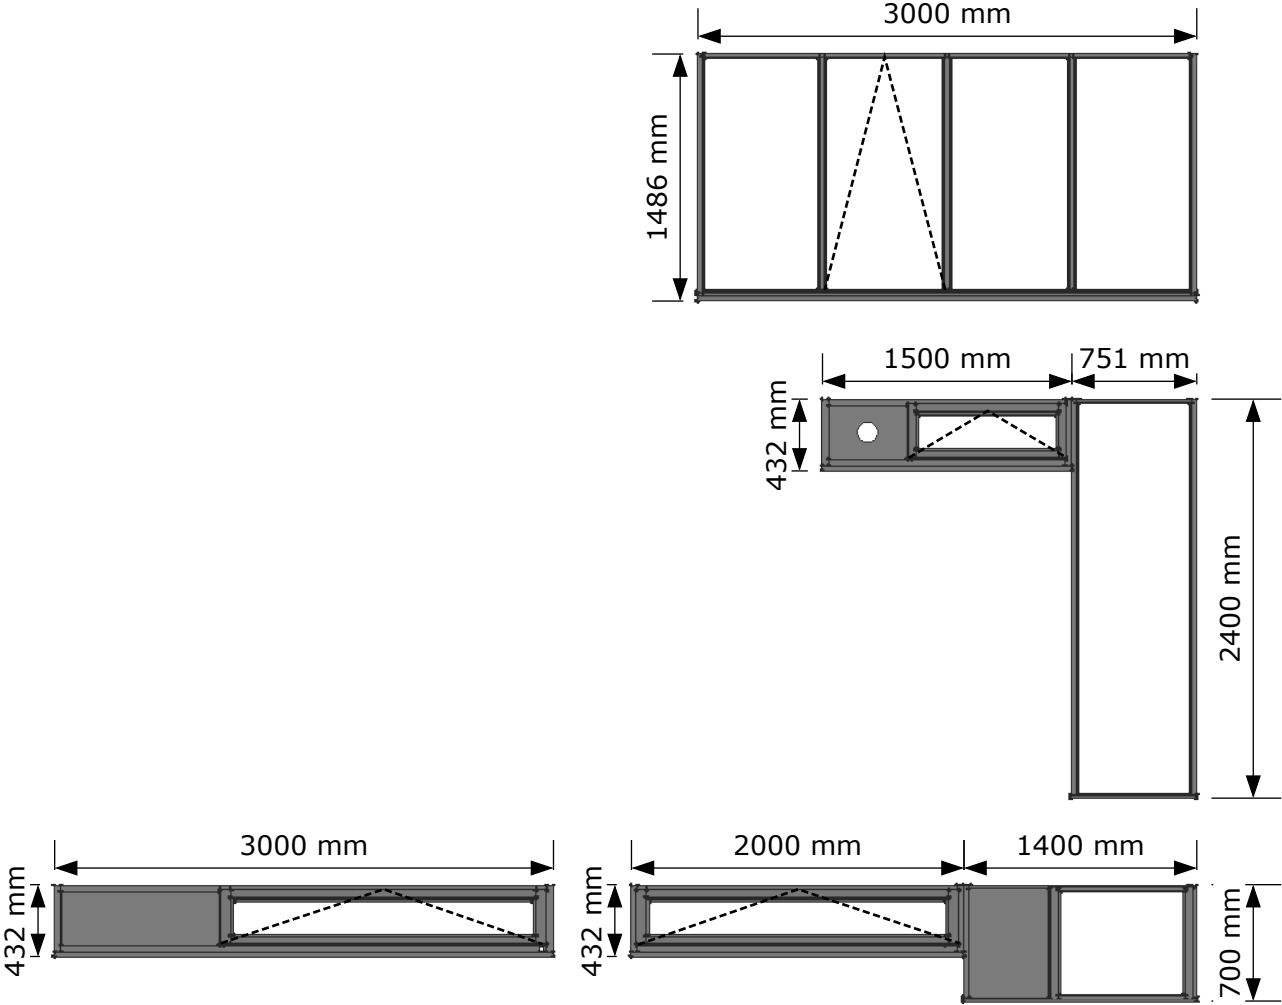


Dunboyne Elevation C (As B of Q)

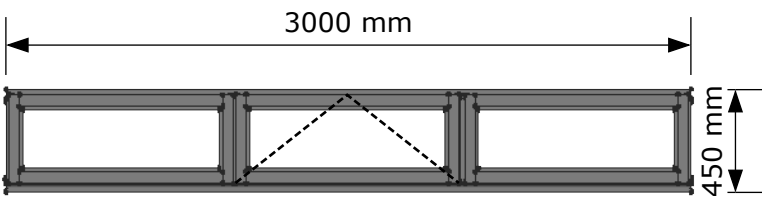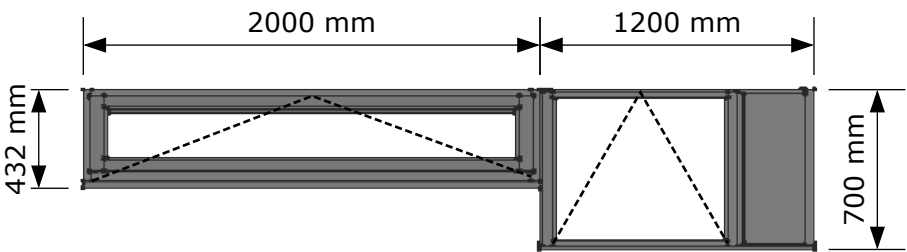

Dunboyne Elevation D (As B of Q)

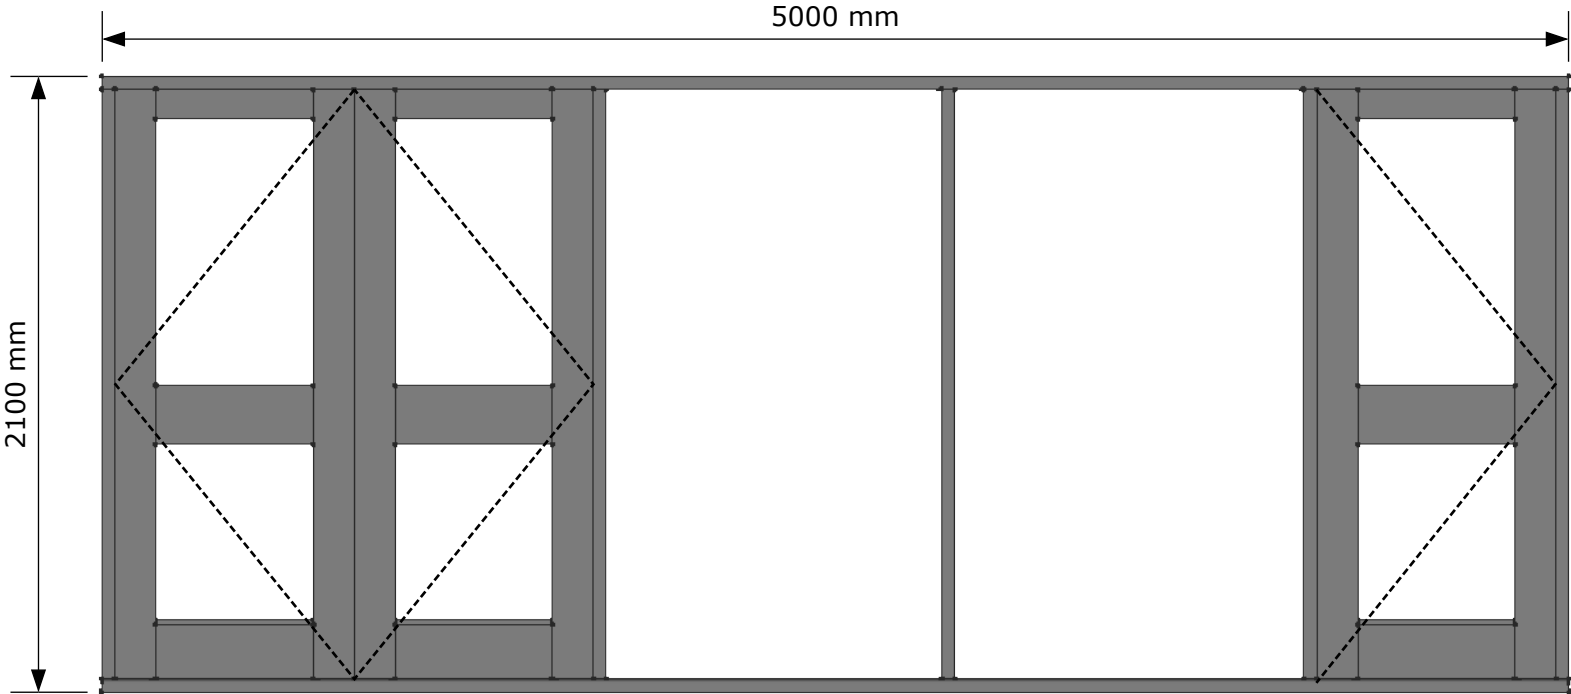

Typical Window

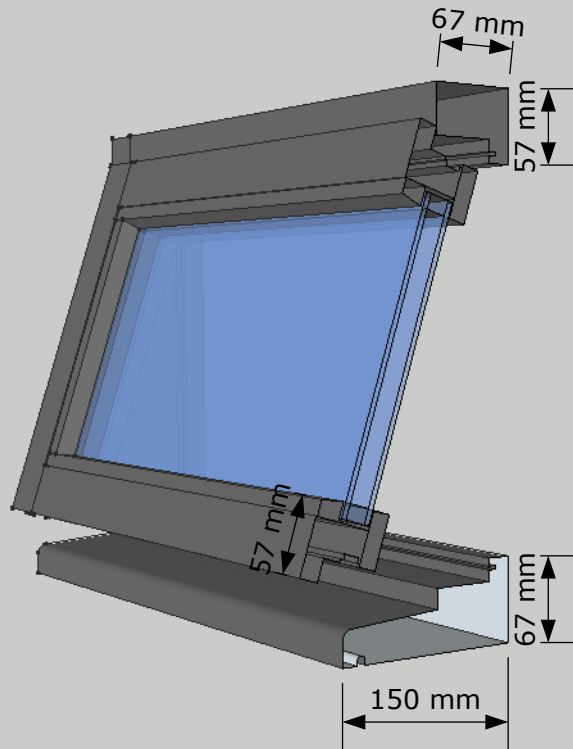

Manufactured from softwood sourced from fully replenishable sources. All Kiln Dried as standard. Finish to be stained to black (final colour T.B.C).


All opening windows to have fully locking handles.

Windows to be hung on friction hinges as standard.

All Doors to have multi point locking for full security.

All windows and doors to be fully double glazed. All windows will meet and surpass FENSA requirements and Document 'L'.

Typical Window

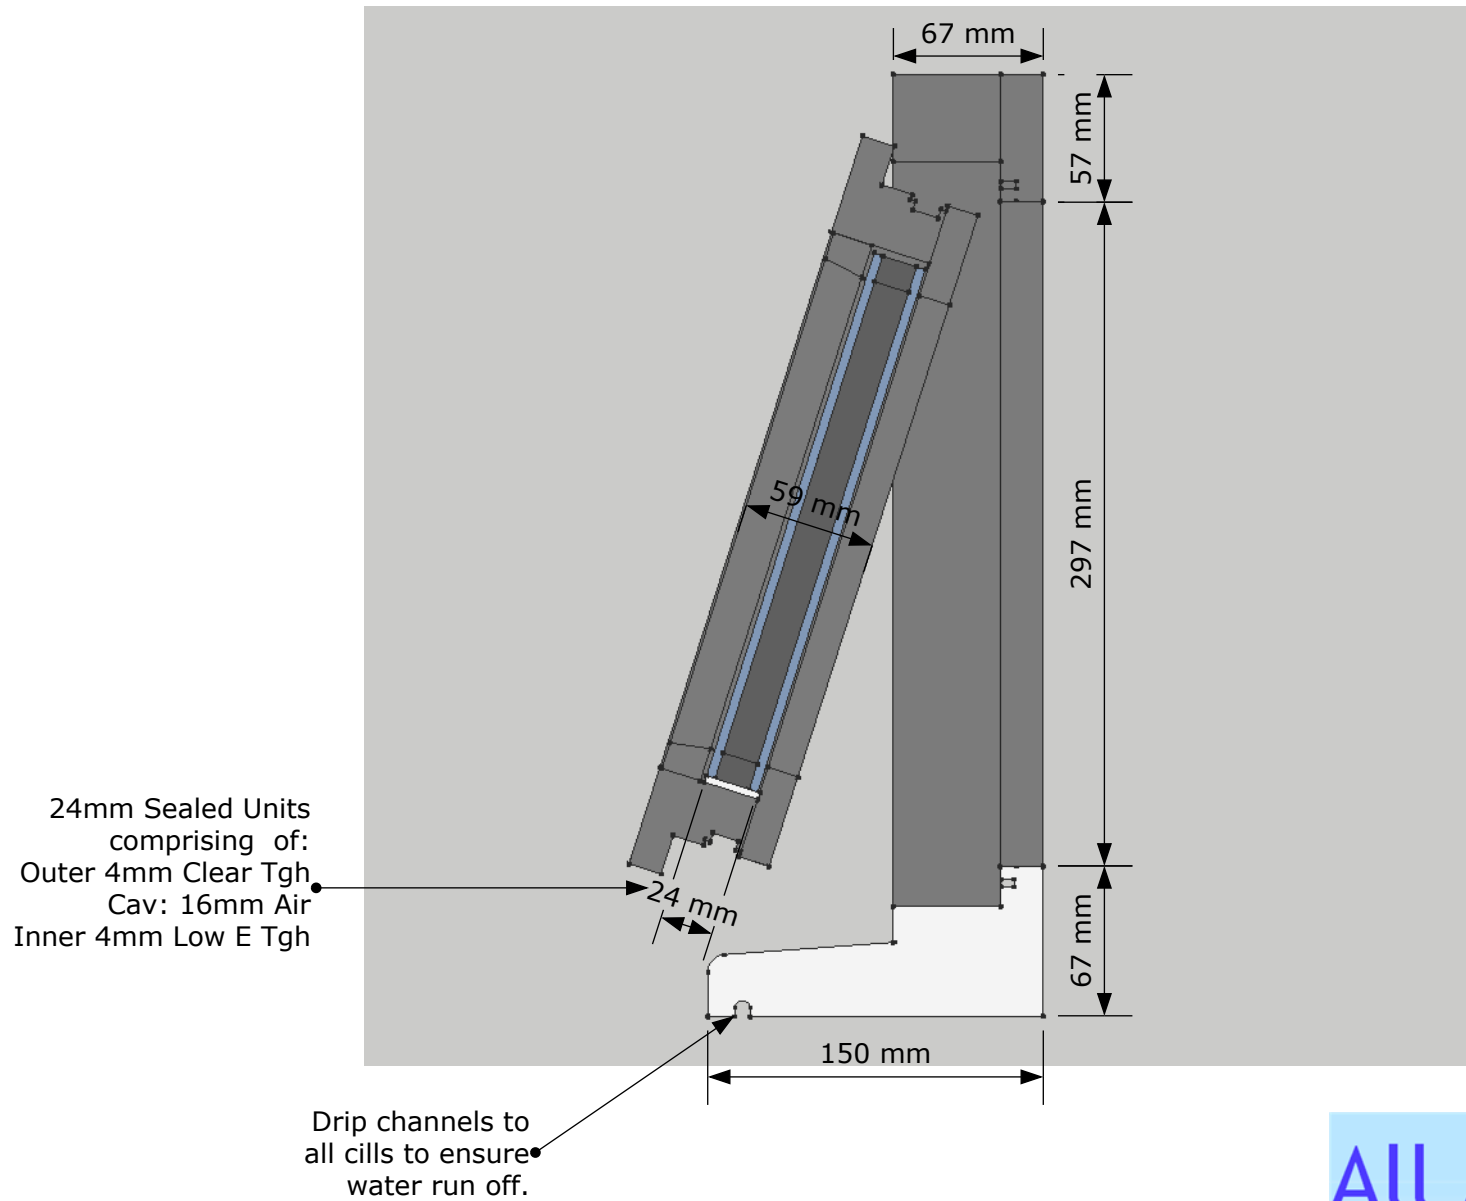

Sealed Unit Data:

Outer Leaf: 4mm Clear Tgh
Cav: 16mm Air
Inner Leaf: 4mm Low E Tgh

U Value (W/m²K) = 1.72

Light Transmittance = 0.74

Typical Door Set

