


New Solid Timber door to 60 mins fire resistance with intumescent strips and smoke seals.

54mm solid timber frame to door.

New softwood 19 x 50mm square edged architrave

SECTION

54mm Thick 1 hour Blank Fire Rated door to BS 476 Pt.22 & BS 8214: Code of Practice for Fire Door Assemblies with Non-Metallic Leaves. A Certificate to confirm 60 mins.

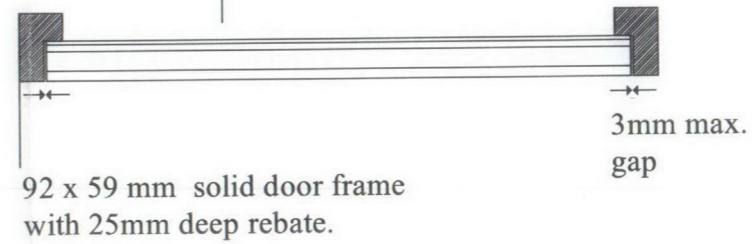

92 x 59 mm solid door frame with 25mm deep rebate.

Notes:

DO NOT SCALE FROM DRAWING.

ALL DIMENSIONS TO BE CONFIRMED ON SITE.

RECEIVED
22 JUL 2009

Section of Proposed Fire Door at Party Wall s
of
Ground Floor & Basement

36 & 38 Earlham Street

Planning Application

July 2009

1:10 @ A3

Shaftesbury Covent
Garden Ltd

19555-05

FRESSON & TEE
CHARTERED SURVEYORS

1 SANDWICH STREET
LONDON WC1H 9PF

Tel: (020) 7391 7100 Fax: (020) 7391 7121