


## DESCRIPTION

The VVP range of vandal resistant dome cameras provide the ideal surveillance solution for monitoring areas that are prone to attack, such as prisons, schools and car parks.

Enclosed in a stylish vandal proof dome housing, the VVP range features a tri-axis gimbal to enable free rotation of the built in lens. With the ability to mount on the wall or ceiling, the VVP range can be installed virtually anywhere with ease.

Featuring 18 in-built IR LEDs and IR cut filter, the VVP9325DNIR is able to view images in light levels of 0.002 Lux.

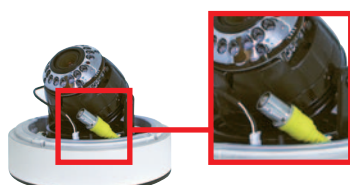

**Service Video Output**  
Enables test monitor to be connected direct to camera

## KEY FEATURES

- |                           |                       |
|---------------------------|-----------------------|
| ■ CCD                     | 1/3"                  |
| ■ Resolution              | 520 Lines             |
| ■ Sensitivity Colour      | 0.3 Lux               |
| ■ Sensitivity Mono        | 0.002 Lux (IR LED ON) |
| ■ Number of Infra Red LED | 18                    |
| ■ IR Range                | 10m                   |
| ■ Lens Size               | 3.3-12mm              |
| ■ Voltage                 | 12V DC                |
| ■ Power Consumption       | 1A                    |
| ■ Dimensions              | 140(Ø)x106(H)mm       |
| ■ Weight                  | Approx. 0.8Kgs        |

### Other Features

- |                           |                        |
|---------------------------|------------------------|
| ■ True Day Night          | ■ SDNR                 |
| ■ Auto White Balance      | ■ Flickerless          |
| ■ Auto Gain Control       | ■ Service Video Output |
| ■ Back Light Compensation | ■ Tri-Axis Gimbal      |
| ■ OSD                     | ■ IP66                 |
| ■ Privacy Zones           | ■ Digital Slow Shutter |

## TECHNICAL SPECIFICATION

Image Sensor	1/3"
Effective Pixel	752H x 582V
Resolution	520 TV Lines
Shutter Speed	1/10,000 sec.
Video Output	VBS 1.0Vp-p(75Ohm Load)
Sync. System	Internal
Scanning System	2:1 Interlaced
S/N Ratio	48dB
Min. Illumination	0.3 Lux (Day Light), 0.002 Lux (IR LED On)
IR LEDs	18 IR LEDs with CDS Sensor
IR Distance	10m (Subject to site conditions)
Lens	3.3 - 12 mm varifocal lens
Power Supply	DC 12V
Operating Temp.	-10°C ~ +55°C
Dimension	140mm(Ø) x 106mm(H)