

PROJECT



Features


- Ideal for public amenity areas
- IP54
- Vertical mounting only

Construction

- Moulded polycarbonate body
- Die-cast aluminium back plate
- Prismatic polycarbonate diffuser
- Hammered specular reflector
- Triple pole mains terminal block
- Supplied with lamp and gear

To specify/order

Polycarbonate exterior bulkhead
for use with discharge or compact fluorescent
lamps; supplied with prismatic diffuser as per
Tamlite 'PROJECT' range

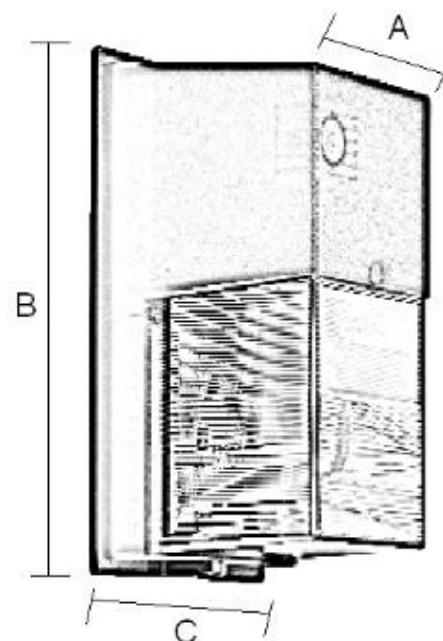

Slimline exterior bulkhead

Cat No	Lamp		Dimensions			Weight (kg)
			A	B	C	
PRO50M	1 x 50W MBF/U		175	278	140	2.30
PRO50S	1 x 50W SON/E(I)		175	278	140	2.45
PRO70S	1 x 70W SON/E(I)		175	278	140	2.45
PRO80M	1 x 80W MBF/U		175	278	140	2.42
PROPL18	1 x 18W PL-C		175	278	140	1.60

Accessories

Suffix Description

Options

Suffix Description
PC Photocell



TAMLITE LIGHTING TECHNICAL DEPARTMENT
TEL 01952 292441 Fax 01952 292155
e-mail technical@tamlite.co.uk

lighting for
a living