



Schedule of Works Key:		06	01.210.06 - Existing roof finishes to 21 southampton Row to be removed back to plywood deck
to be read in conjunction with schedule 383(SL) Listed Building Consent Schedule of Works, section 01, sheet 210		07	01.210.07 - Existing key clamp handrail guarding to be removed and store for reuse
01	01.210.01 - Existing shopfront glazing to be removed at ground floor level	08	01.210.08 - Existing rooftop plant to be removed completely
02	01.210.02 - Existing door to be replaced from curved shopfront glazing	09	01.210.09 - Existing windows to Southampton Row to be retained, existing paintwork to be stripped back ready for redecoration, plus existing secondary glazing to be removed
03	01.210.03 - Paintwork to retained ground floor curved shopfront glazing to be stripped back ready for redecoration	10	01.210.10 - Existing dormers and windows to be retained and repaired as required
04	01.210.04 - Existing first floor windows to Southampton Row to be removed completely	11	01.210.11 - Allow for existing gates to be carefully removed and retained for re-installation to suit new arrangement with addition of pass gate.
05	01.210.05 - Paintwork to retained first floor curved shopfront glazing to be stripped back ready for redecoration	12	01.210.12 - Existing non original lift overrun to be carefully taken down to allow new core to be installed, then rebuilt as existing

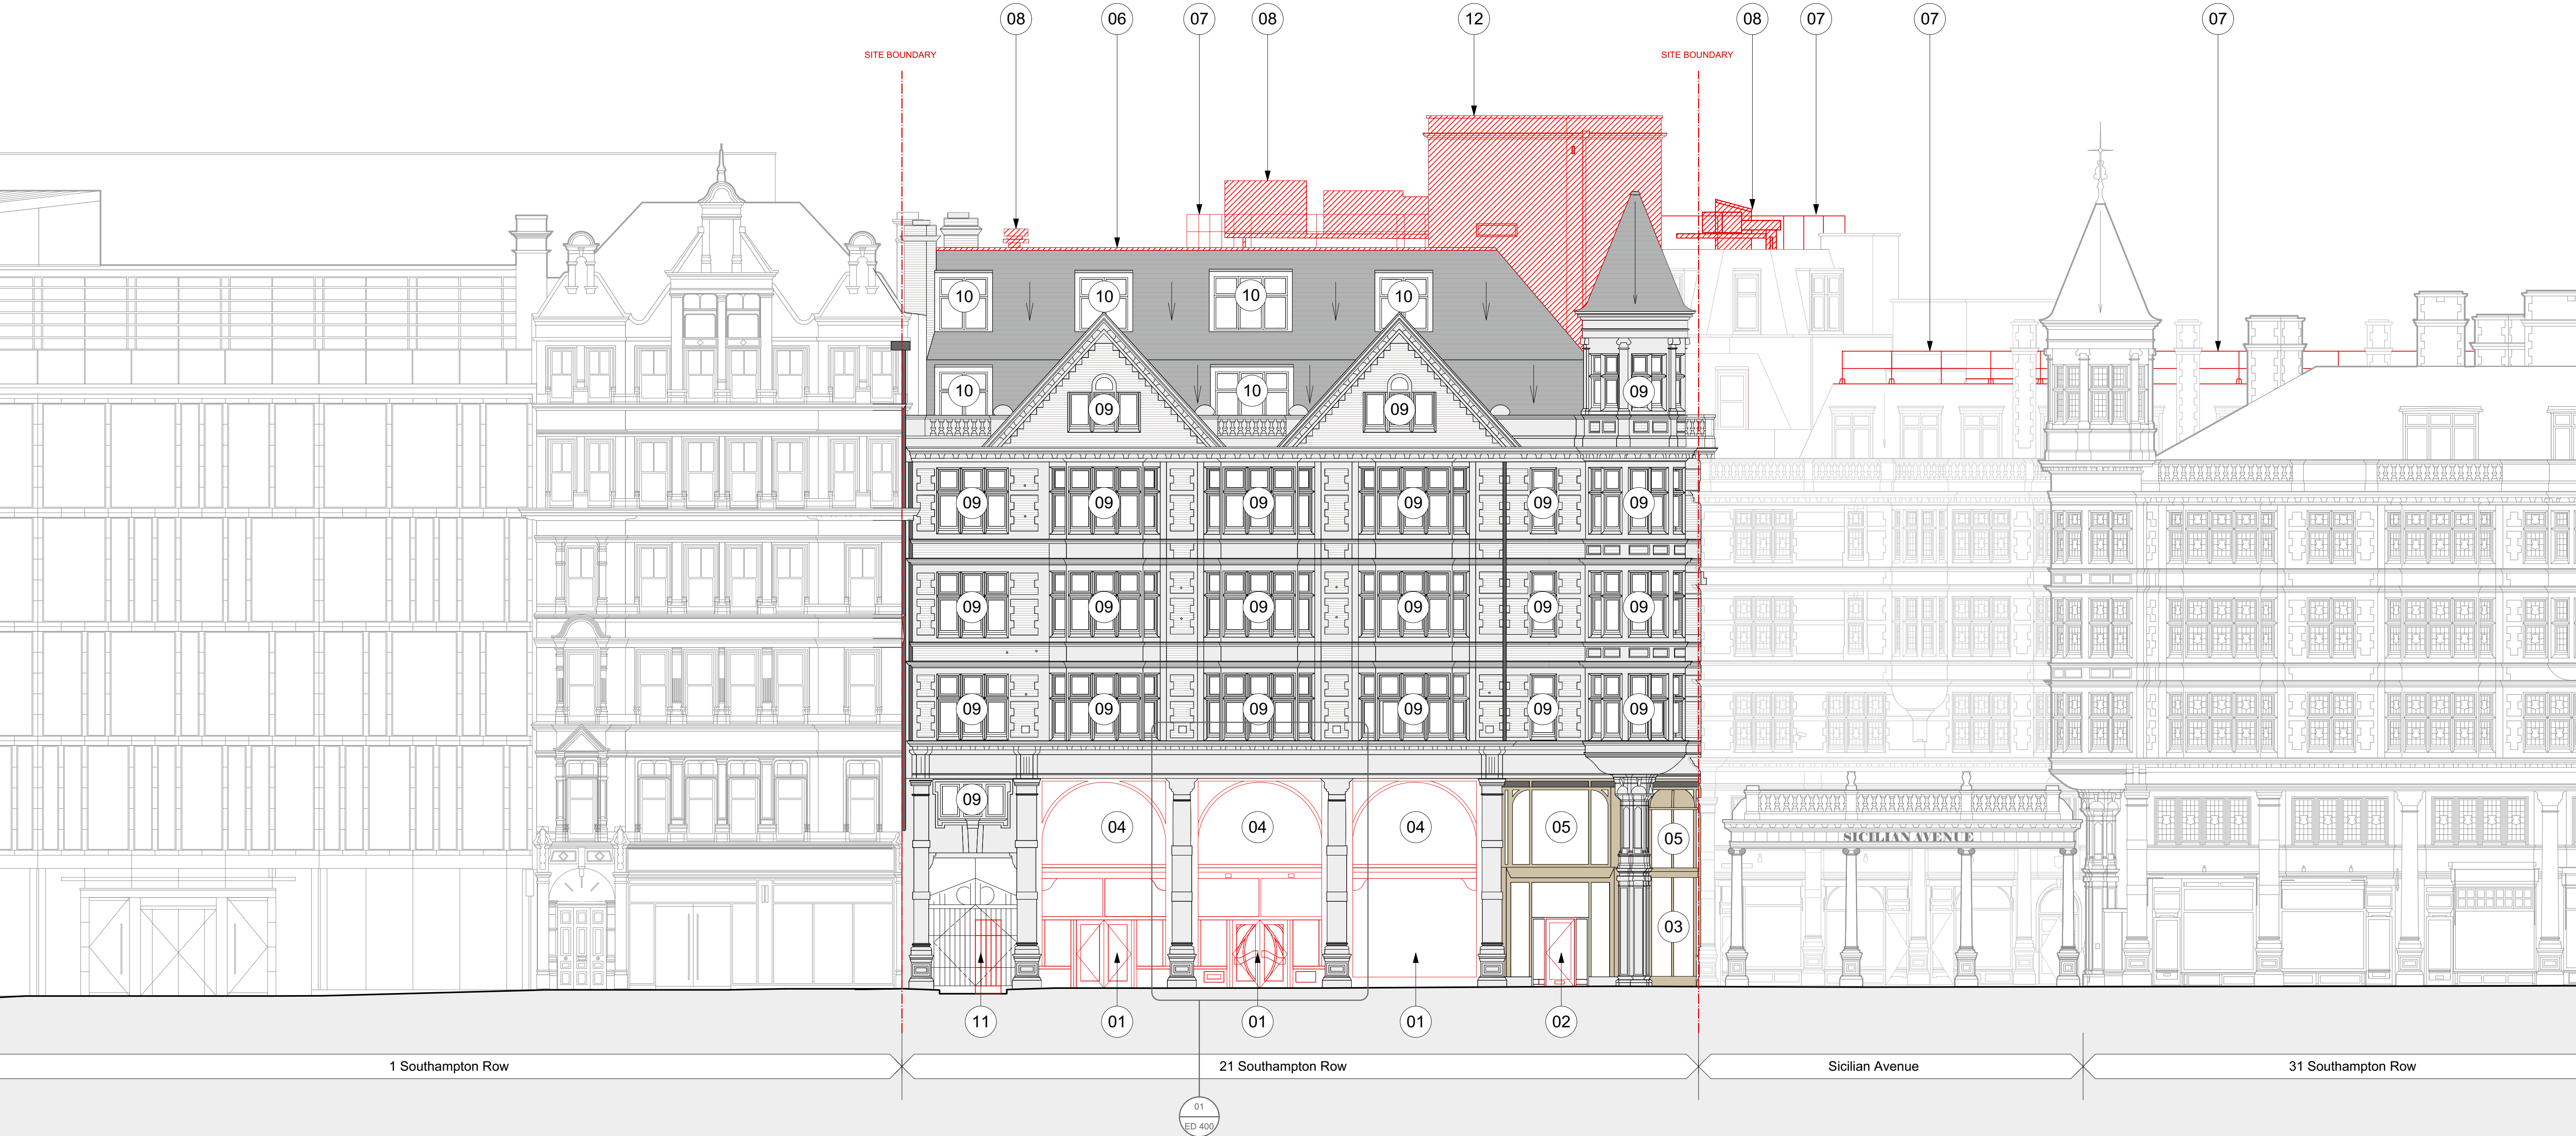

1 21SR Demolition East Context Elevation
Scale: 1:100

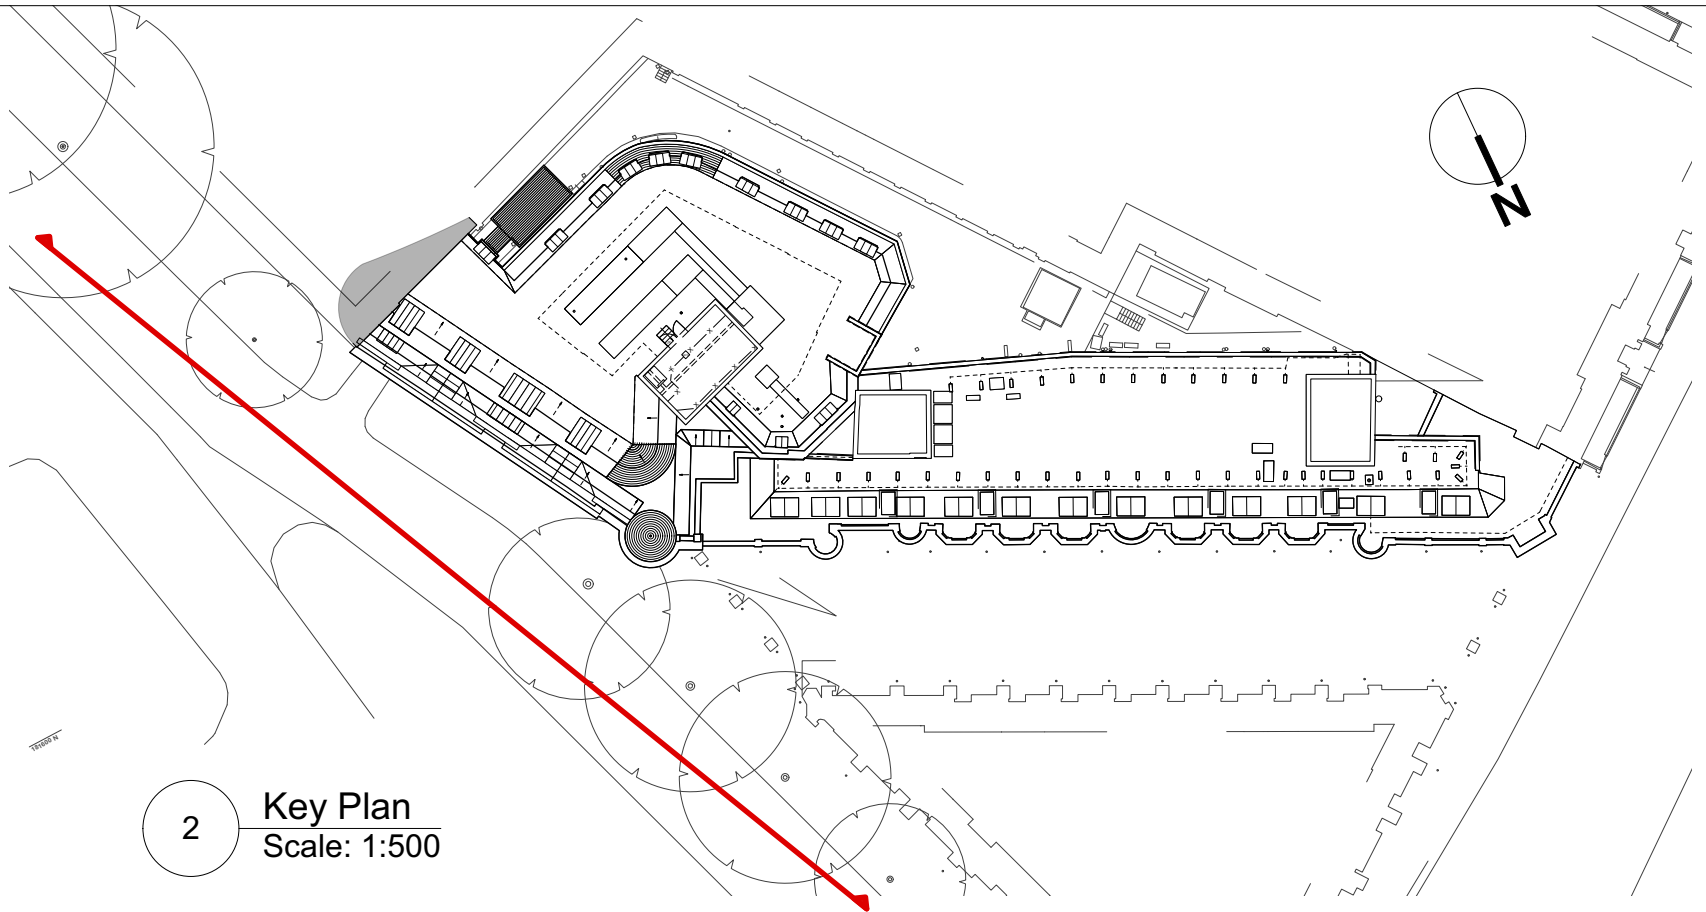

All dimensions to be checked on site prior to commencement of any works, and/or preparation of any shop drawings.
Sizes of and dimensions to any structural or services elements are indicative only. See structural and service engineers drawings for actual sizes / dimensions.
This drawing to be read in conjunction with all other Architect's drawings, specifications and other Consultants' information.
All proprietary systems shown on this drawing are to be installed strictly in accordance with the Manufacturers/Suppliers recommended details.
Any discrepancies between information shown on this drawing and any other contract information or manufacturers/suppliers recommendations is to be brought to the attention of the Architect.

Revision	Date	Amendment
PL-1	22/07/2022	Issued for Planning
PL-2	01/03/2023	Revisions as per agreed amendments
PL-3	07/02/2025	Revisions as per agreed amendments.

Date Jan 2021	Drawn KP	Check DT	Project Vernon, Sicilian Hse/21 Southampton Row	Job Ref. 383
Scale 1:100 @A1			Title 21SR Demolition East Context Elevation	
Status PLANNING	Client Ref EDR	Drwg. no. 383 (DE) 210		Rev. PL-3
Hale Brown Architects Ltd. Unit 1.04, Edinburgh House, 170 Kennington Lane, London, SE11 5DP T: 020 3735 7442 E: mail@halebrown.com W: www.halebrown.com				