
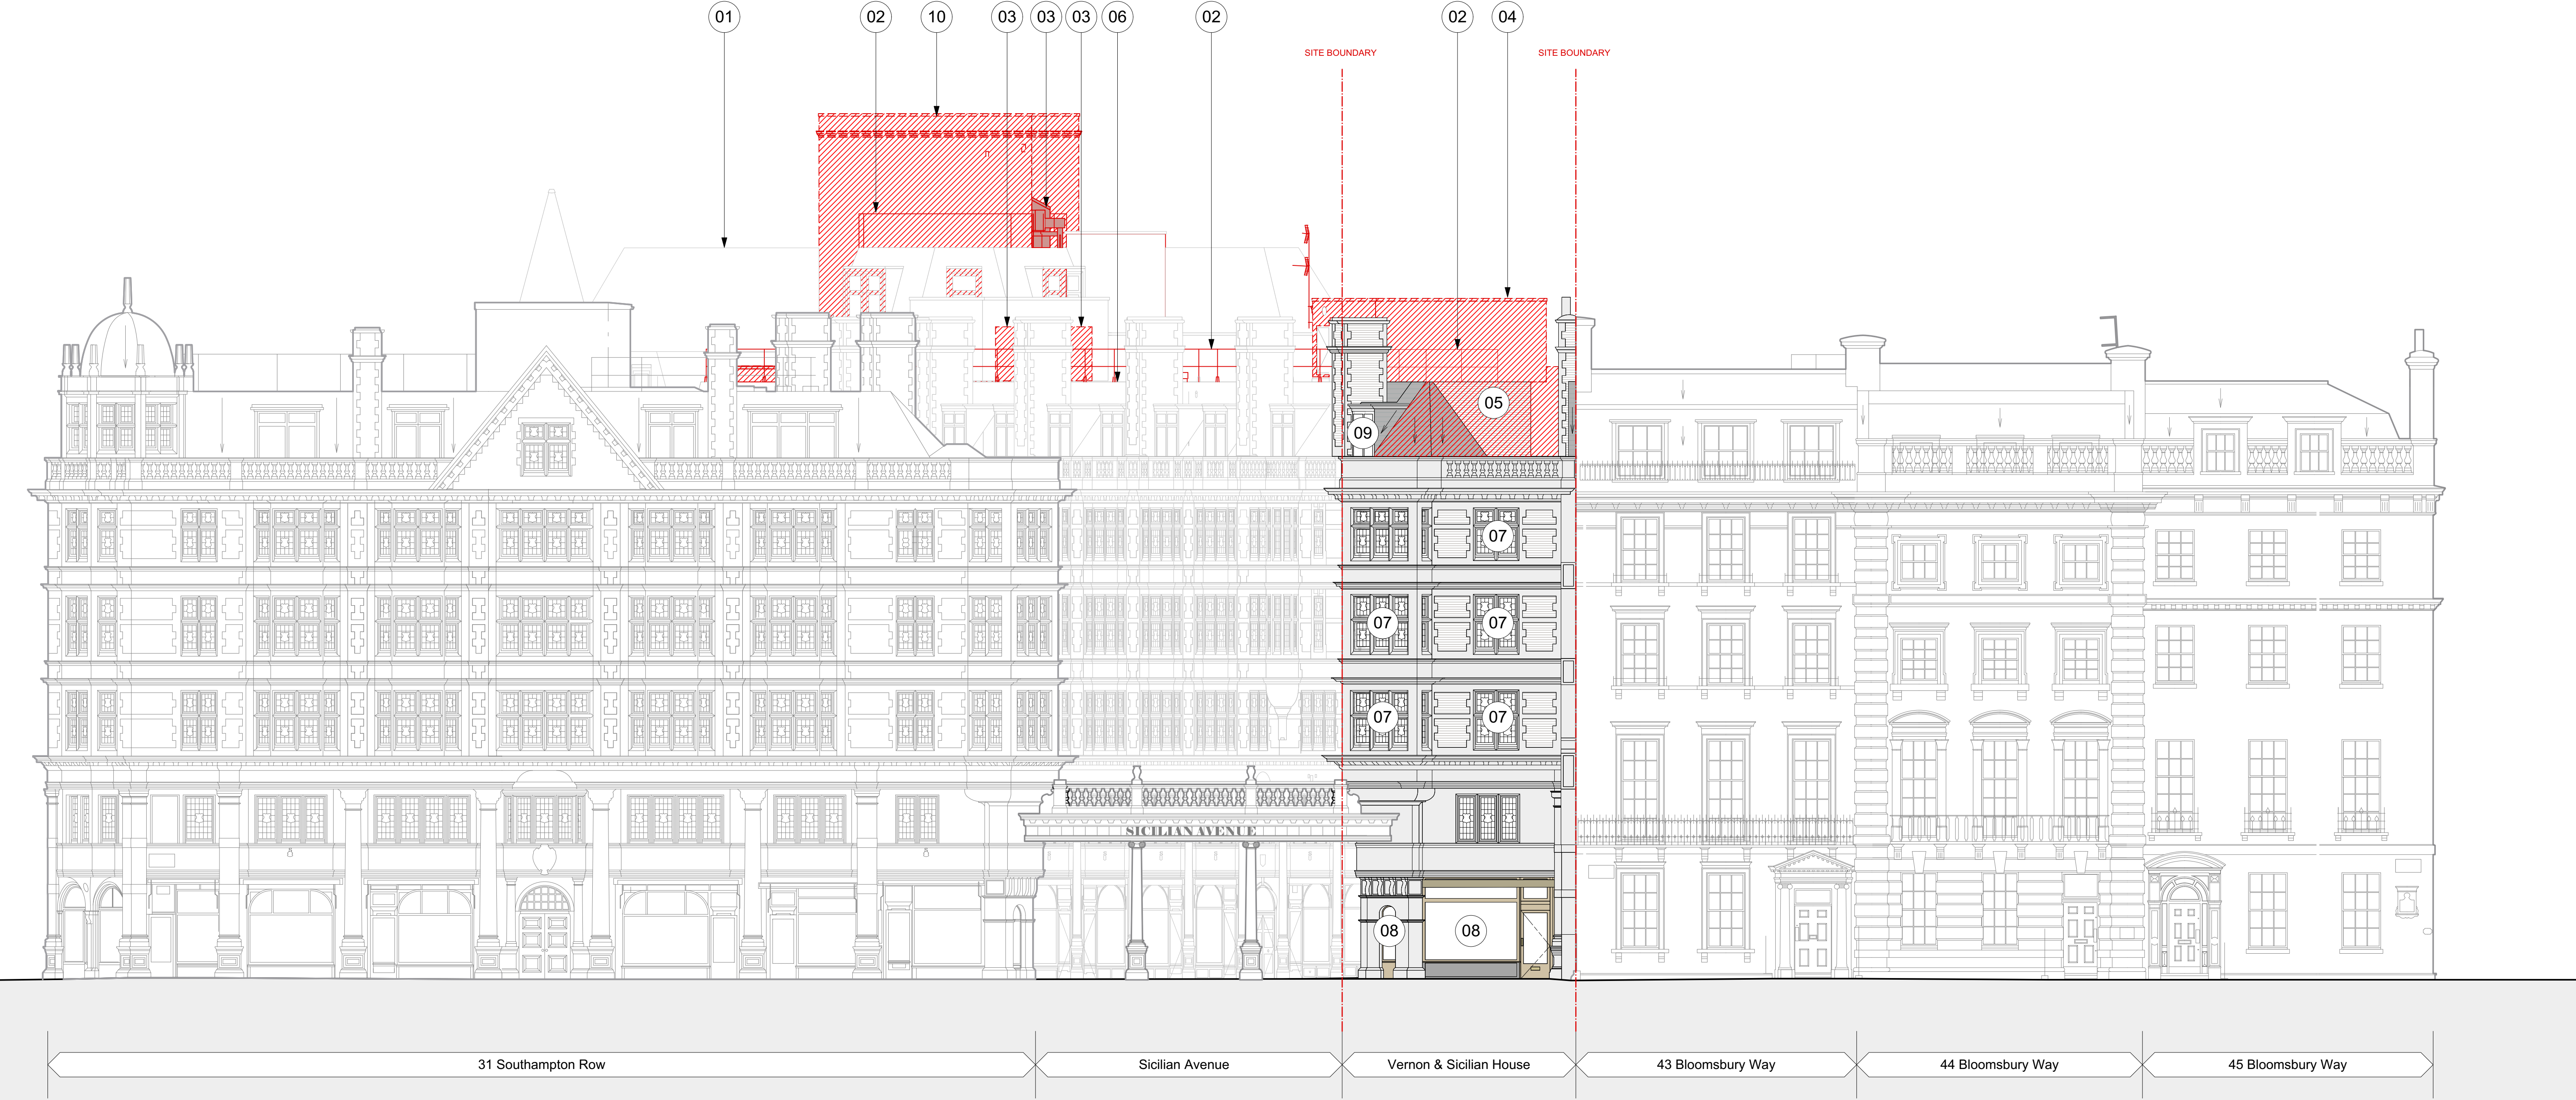


Schedule of Works Key:		
to be read in conjunction with schedule 383(SL) Listed Building Consent Schedule of Works, section 01, sheet 261		
01	01.261.01 - Existing roof finishes to 21 Southampton Row to be removed back to plywood deck	0501.261.05 - 5th floor mansard roof demolished to allow for new rooftop extension
02	01.261.02 - Existing key clamp handrail guarding to be removed and store for reuse	0601.261.06 - Existing flat roof to Vernon + Sicilian House to be removed entirely, including waterproofing and woodwool roofing panels back to existing retained steel beams below
03	01.261.03 - Existing rooftop plant to be removed completely	0701.261.07 - Existing windows to Sicilian Avenue to be retained, existing paintwork to be stripped back ready for redecoration, plus existing secondary glazing to be removed
04	01.261.04 - Lift car and associated services to be removed entirely, and rooftop lift motor room to be demolished completely.	0801.261.08 - Existing shop front glazing and doors to be retained and protected throughout works, to be redecorated
		0901.261.09 - Existing dormers and windows to Sicilian Avenue to be retained, existing paintwork to be stripped back ready for redecoration, plus existing secondary glazing to be removed
		1001.261.10 - Existing non original lift overrun to be carefully taken down to allow new core to be installed, then rebuilt as existing.

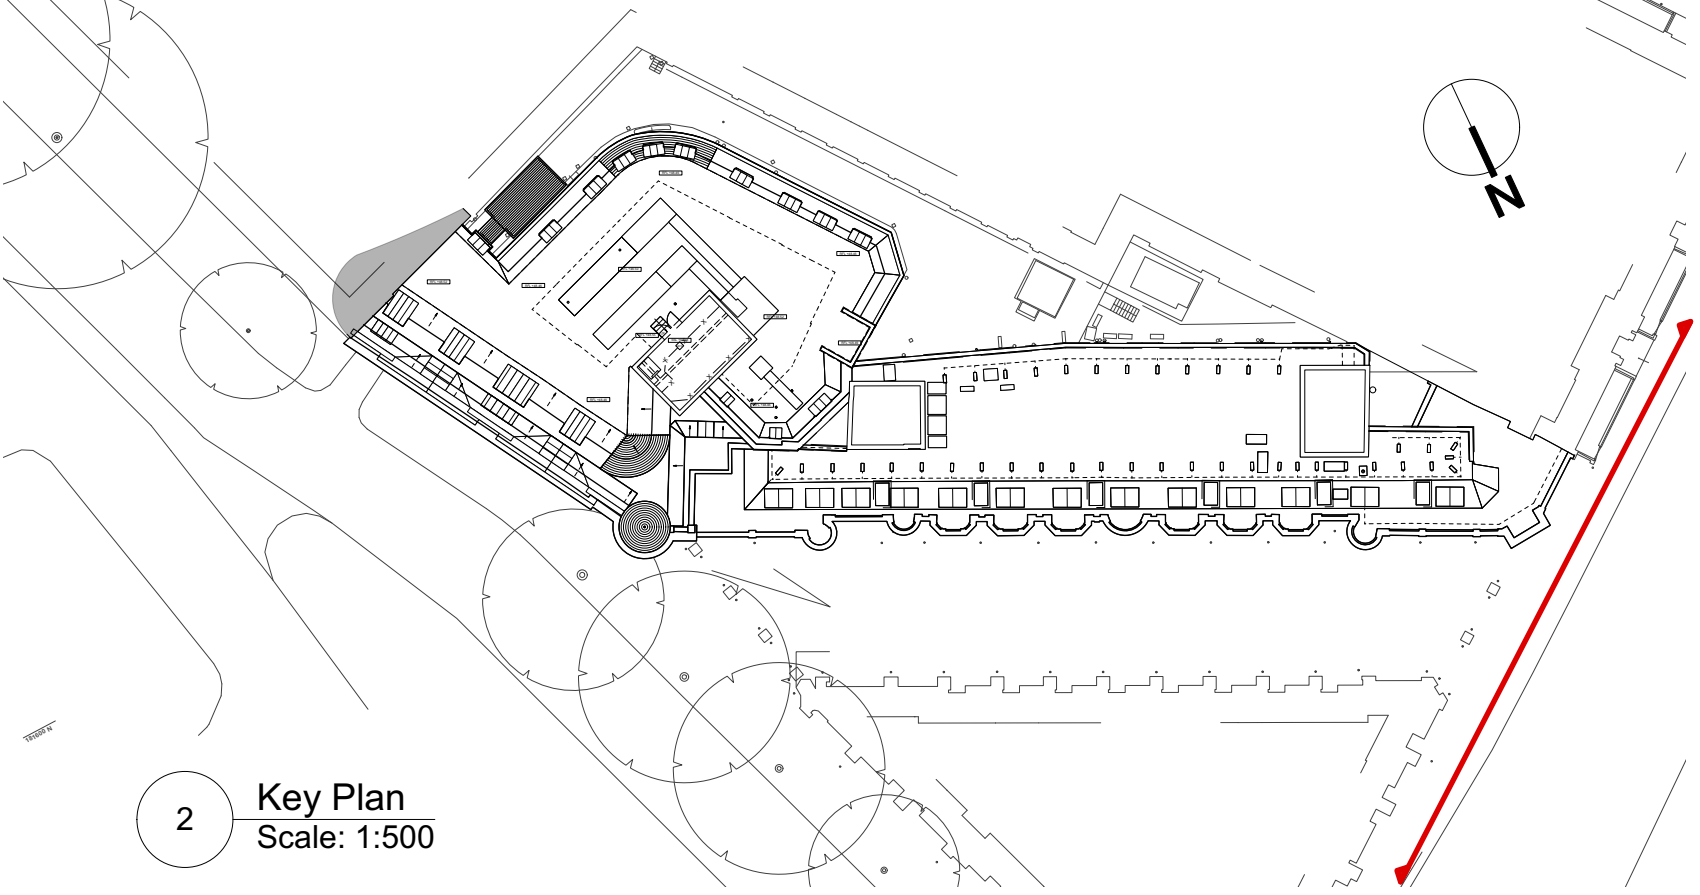

1 Vernon & Sicilian House Demolition North West Context Elevation  
Scale: 1:100

0 5m 10m 20m